



Submittal Data Information

FI Series Pumps

301-1441D

EFFECTIVE: APRIL 30, 2018

SUPERSEDES: NEW


1160 RPM MODEL 6011D

JOB _____ ENGINEER _____

CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

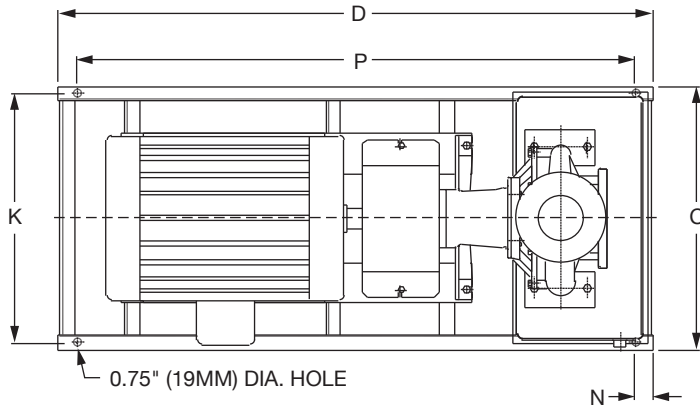

OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)


Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
213T - 215T	851 (386)
254T - 256T	940 (426)
284T - 286T	1079 (489)

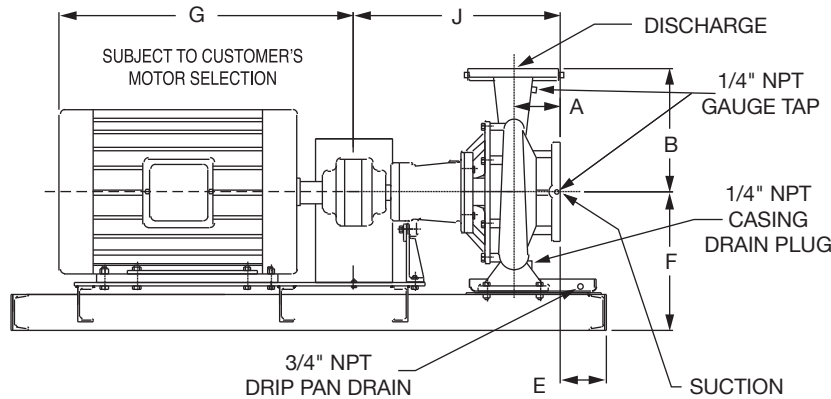

DIMENSIONS

50 Cycle Performance Curves attached when applicable.


Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1160 (RPM)	A		B		C	D	E		F	G	J		K	N	P
				ANSI Class 125	ANSI Class 250	ANSI Class 125	ANSI Class 250			ANSI Class 125	ANSI Class 250			ANSI Class 125	ANSI Class 250			
6011D 8 x 6 (203 x 152)	215T	215T	5	6.10 (155)	6.60 (168)	15.00 (381)	15.44 (392)	25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)	16.59 (421)	18.19 (462)	25.90 (658)	26.40 (671)	23.67 (601)	2.00 (50)	49.0 (1245)
	254T	254T	7.5					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		21.69 (551)			23.67 (601)		49.0 (1245)
	256T	256T	10					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		23.19 (589)			23.67 (601)		49.0 (1245)
	284T	284T	15					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		24.94 (633)			23.67 (601)		49.0 (1245)
	286T	286T	20					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		25.06 (637)			23.67 (601)		49.0 (1245)

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().
Do not use for construction purposes unless certified.

MATERIALS OF CONSTRUCTION

	BRONZE FITTED		
	STANDARD PUMP CONSTRUCTION		OPTIONAL 125# or 250#
	125# Flange	250# Flange	
Casing	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Cover	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Impeller	Bronze ASTM B584 ALLOY C83600 or C84400	Bronze ASTM B584 ALLOY C83600 or C84400	N/A
Wear Ring	N/A	N/A	Bronze ASTM B584-98A C92200
Shaft	Stainless Steel TYPE 416"™ ASTM A582	Stainless Steel TYPE 416"™ ASTM A582	N/A
Shaft Sleeve	Bronze ASTM B584-98A C92200	Bronze ASTM B584-98A C92200	Stainless Steel TYPE 303 ASTM A276
Mechanical Seal	Ceramic/EPT	Ceramic/EPT	Tungsten Carbide/EPT or Silicon- Carbide/EPT
Seal Flush Line Assembly	N/A	N/A	Copper & Brass C3600

N/A - Not Available

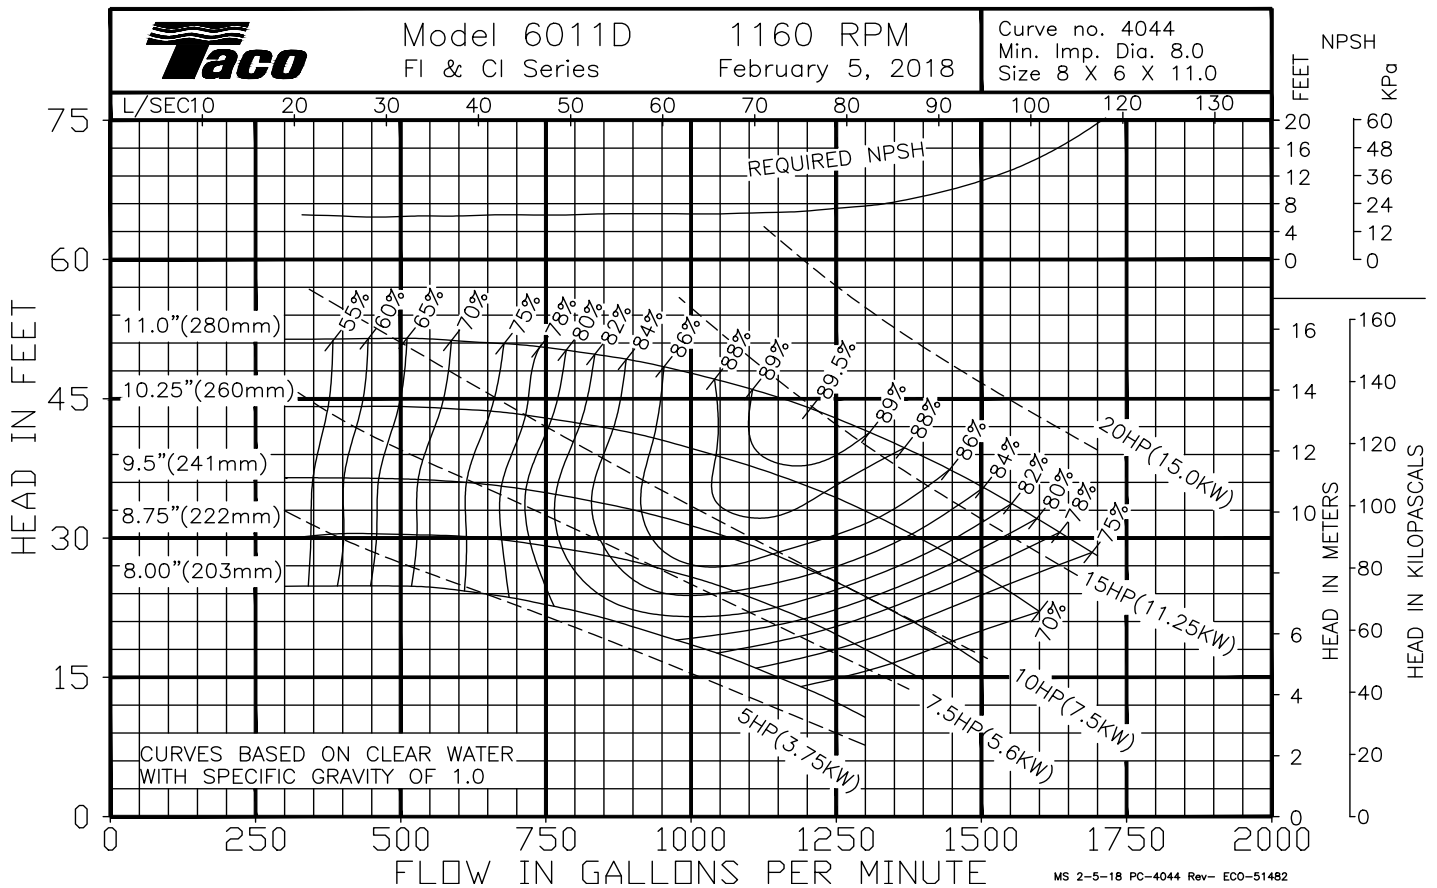

Comments: _____

Taco Comfort Solutions® A Taco Family Company

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2017 Taco, Inc.



Submittal Data Information

FI Series Pumps (50 Hz)

301-1489D I

EFFECTIVE: APRIL 30, 2018

SUPERSEDES: NEW


1450 RPM MODEL 6011D

JOB _____ ENGINEER _____

CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

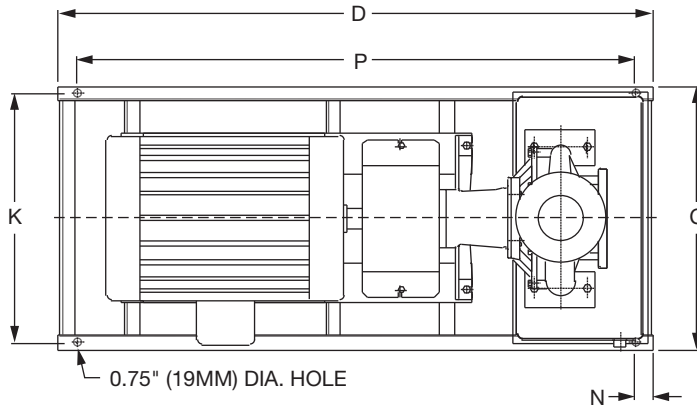


OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)

Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

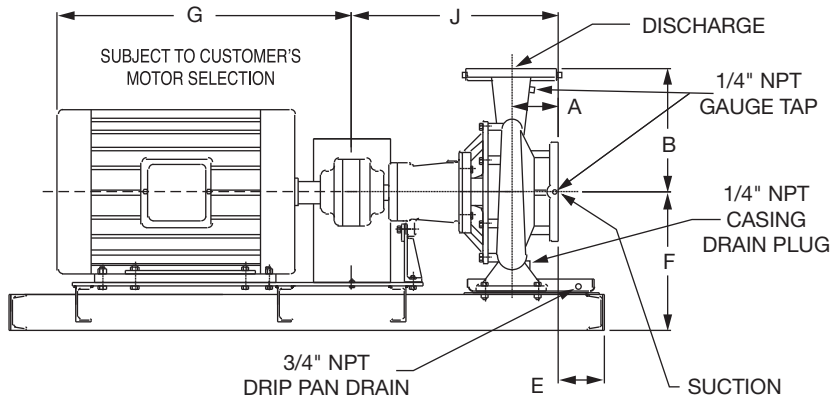

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
254T - 256T	1038 (471)
284T - 286T	1265 (574)
324T - 326T	1370 (522)

DIMENSIONS


Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1450 (RPM)	A		B		C	D	E		F	G	J		K	N	P
				ANSI Class 125	ANSI Class 250	ANSI Class 125	ANSI Class 250			ANSI Class 125	ANSI Class 250			ANSI Class 125	ANSI Class 250			
6011D 8 x 6 (203 x 152)	215T	215T	10	6.10 (155)	6.60 (168)	15.00 (381)	15.44 (392)	25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)	16.59 (421)	18.19 (462)	25.90 (658)	26.40 (671)	23.67 (601)	2.00 (51)	49.0 (1245)
	254T	254T	15					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)							49.0 (1245)
	256T	256T	20					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)							49.0 (1245)
	284T	284T	25					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)							49.0 (1245)
	286T	286T	30					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)							49.0 (1245)
	324T	324T	40					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)							49.0 (1245)

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().
Do not use for construction purposes unless certified.

MATERIALS OF CONSTRUCTION

	BRONZE FITTED		
	STANDARD PUMP CONSTRUCTION		OPTIONAL 125# or 250#
	125# Flange	250# Flange	
Casing	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Cover	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Impeller	Bronze ASTM B584 ALLOY C83600 or C84400	Bronze ASTM B584 ALLOY C83600 or C84400	N/A
Wear Ring	N/A	N/A	Bronze ASTM B584-98A C92200
Shaft	Stainless Steel TYPE 416"™" ASTM A582	Stainless Steel TYPE 416"™" ASTM A582	N/A
Shaft Sleeve	Bronze ASTM B584-98A C92200	Bronze ASTM B584-98A C92200	Stainless Steel TYPE 303 ASTM A276
Mechanical Seal	Ceramic/EPT	Ceramic/EPT	Tungsten Carbide/EPT or Silicon Carbide/EPT
Seal Flush Line Assembly	N/A	N/A	Copper & Brass C3600

N/A - Not Available

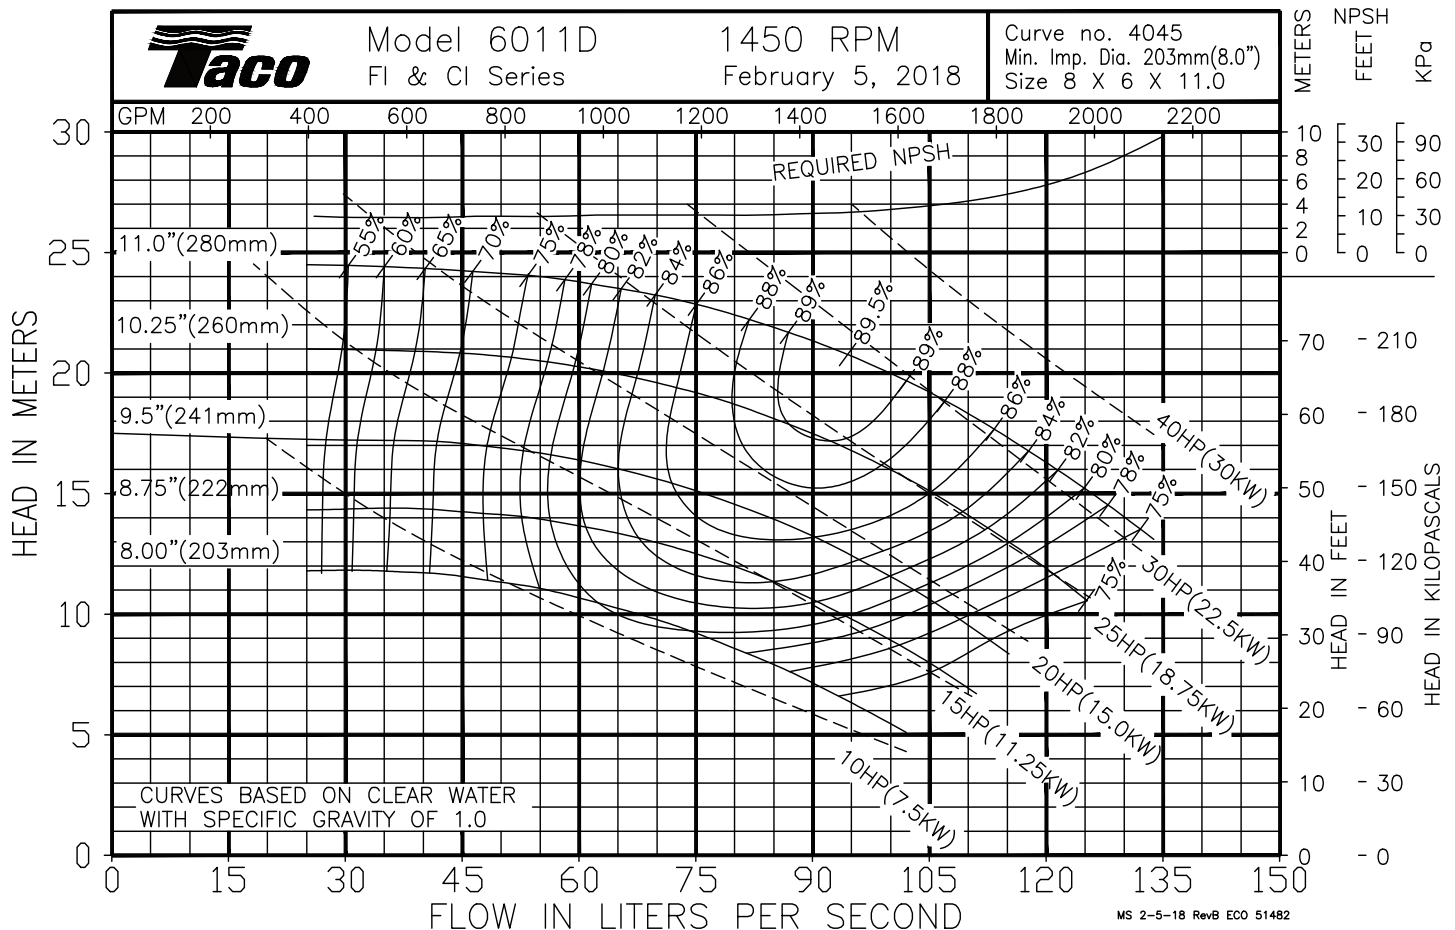

Taco Comfort Solutions A Taco Family Company

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2017 Taco, Inc.



Submittal Data Information

FI Series Pumps

301-1442D

EFFECTIVE: APRIL 30, 2018

SUPERSEDES: NEW


1760 RPM MODEL 6011D

JOB _____ ENGINEER _____

CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

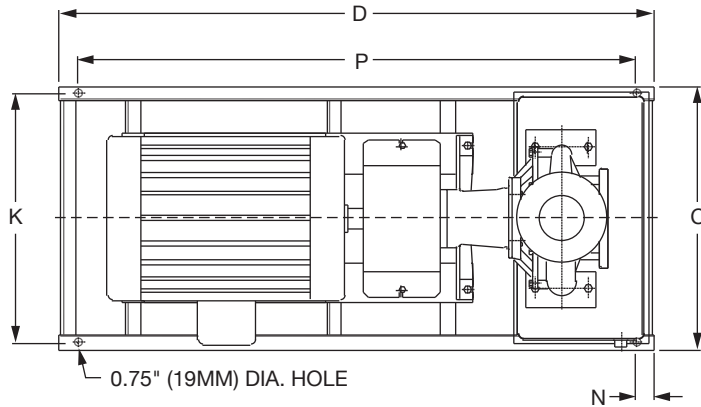

OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)


Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
254T - 256T	944 (428)
284T - 286T	1150 (522)
324T - 326T	1292 (586)
364T - 365T	1466 (665)

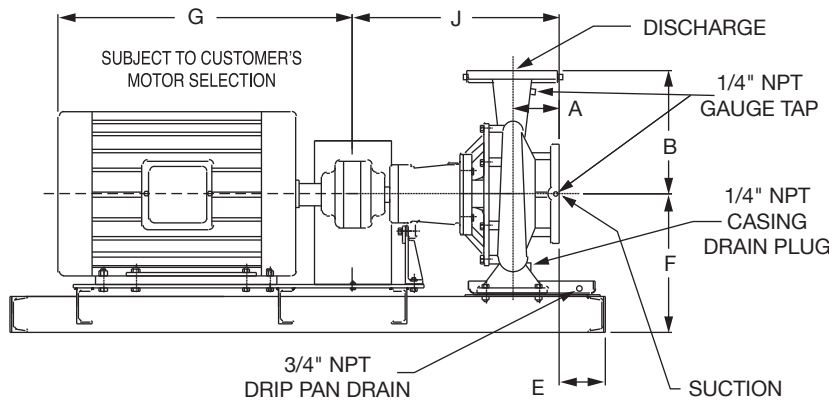

DIMENSIONS

50 Cycle Performance Curves attached when applicable.


Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1760 (RPM)	A		B		C	D	E		F	G	J		K	N	P
				ANSI Class 125	ANSI Class 250	ANSI Class 125	ANSI Class 250			ANSI Class 125	ANSI Class 250			ANSI Class 125	ANSI Class 250			
6011D 8 x 6 (203 x 152)	256T	256T	20	6.10 (155)	6.60 (168)	15.00 (381)	15.44 (392)	25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)	16.59 (421)	23.19 (589)	25.90 (658)	26.40 (671)	23.67 (601)	2.00 (50)	49.0 (1245)
	284T	284T	25					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		24.94 (633)					49.0 (1245)
	286T	286T	30					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		25.06 (637)					49.0 (1245)
	324T	324T	40					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		26.69 (678)					49.0 (1245)
	326T	326T	50					25.17 (639)	53.0 (1346)	0.94 (24)	0.44 (11)		27.69 (703)					49.0 (1245)
	364T	364T	60					25.17 (639)	64.0 (1626)	0.94 (24)	0.44 (11)		29.69 (754)					60.0 (1524)

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().
Do not use for construction purposes unless certified.

MATERIALS OF CONSTRUCTION

	BRONZE FITTED		
	STANDARD PUMP CONSTRUCTION		OPTIONAL 125# or 250#
	125# Flange	250# Flange	
Casing	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Cover	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Impeller	Bronze ASTM B584 ALLOY C83600 or C84400	Bronze ASTM B584 ALLOY C83600 or C84400	N/A
Wear Ring	N/A	N/A	Bronze ASTM B584-98A C92200
Shaft	Stainless Steel TYPE 416-T™ ASTM A582	Stainless Steel TYPE 416-T™ ASTM A582	N/A
Shaft Sleeve	Bronze ASTM B584-98A C92200	Bronze ASTM B584-98A C92200	Stainless Steel TYPE 303 ASTM A276
Mechanical Seal	Ceramic/EPT	Ceramic/EPT	Tungsten Carbide/EPT or Silicon Carbide/EPT
Seal Flush Line Assembly	N/A	N/A	Copper & Brass C3600

N/A - Not Available

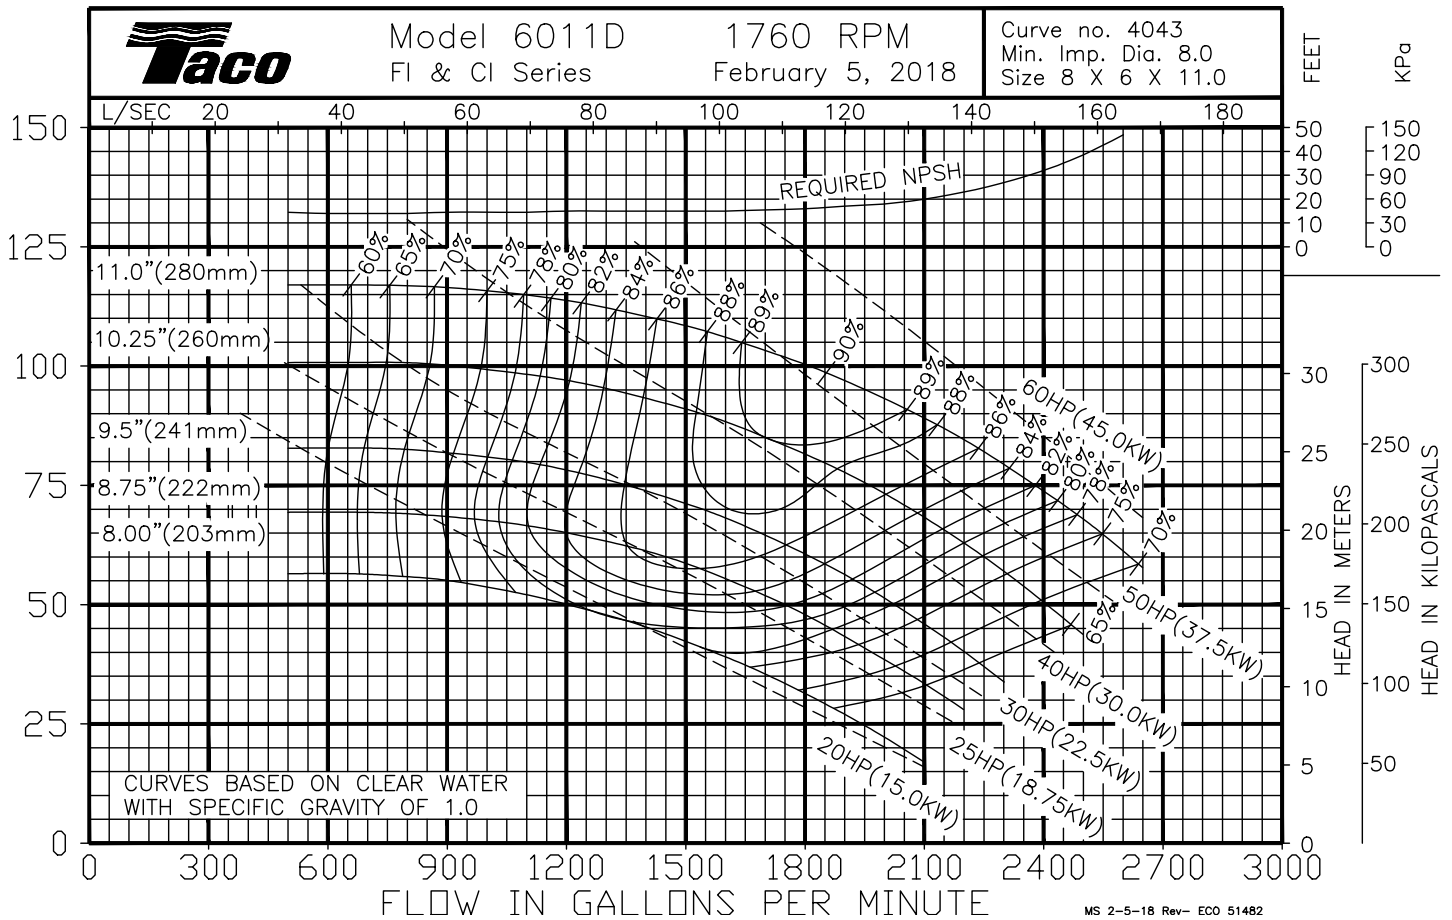

Comments:

Taco Comfort Solutions A Taco Family Company

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2017 Taco, Inc.





Submittal Data Information

CI Series Pumps

301-1341D

EFFECTIVE: APRIL 30, 2018

SUPERSEDES: NEW

1160 RPM MODEL 6011D


JOB _____

ENGINEER _____

CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

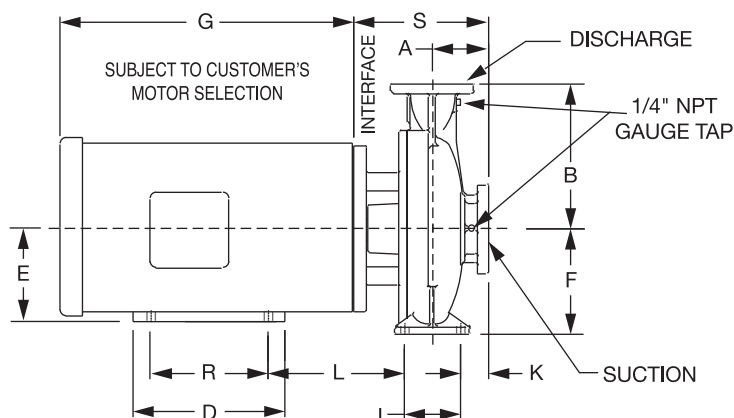


OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)

Motors: All NEMA Standard (T Frame)
 * In accordance with ANSI Standard B16.1 Class 125
 ** In accordance with ANSI Standard B16.1 Class 250 Dim.

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
254JM - 256JM	691 (313)
284JM - 286JM	813 (369)

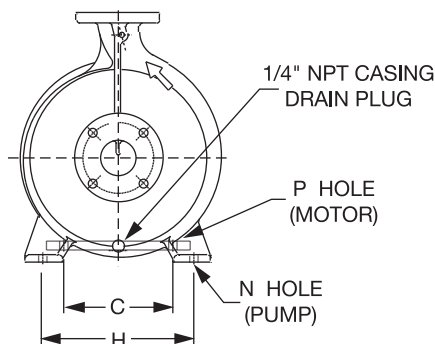

DIMENSIONS (250 PSI)

Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1160 (RPM)	A ANSI Class 250	B ANSI Class 250	K ANSI Class 250	S ANSI Class 250
6011D 8 x 6 (203 x 152)	254JM	254JM	7.5	6.60 (168)	15.44 (392)	3.65 (93)	12.88 (327)
	256JM	256JM	10				
	284JM	284JM	15				
	286JM	286JM	20				

DIMENSIONS

50 Cycle Performance Curves attached when applicable.


Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1160 (RPM)	A ANSI Class 125	B ANSI Class 125	C (Motor)	D	E	F	G	H (Pump)	J	K ANSI Class 125	L	N (Pump)	P	R	S ANSI Class 125
6011D 8 x 6 (203 x 152)	254JM	254JM	7.5	6.10 (155)	15.00 (381)	10.0 (254)	9.50 (241)	6.25 (159)	12.40 (315)	16.19 (411)	17.72 (450)	5.90 (150)	3.15 (80)	8.32 (211)	0.63 (16)	0.53 (13)	8.25 (210)	12.38 (314)
	256JM	256JM	10			10.0 (254)	11.75 (298)	6.25 (159)		16.19 (411)				8.32 (211)		0.53 (13)	10.00 (254)	
	284JM	284JM	15			11.0 (279)	10.75 (273)	7.00 (178)		19.81 (503)				8.32 (211)		0.53 (13)	9.50 (241)	
	286JM	286JM	20			11.0 (279)	12.25 (311)	7.00 (178)		19.81 (503)				8.32 (211)		0.53 (13)	11.0 (279)	

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().
 Do not use for construction purposes unless certified.

MATERIALS OF CONSTRUCTION

	BRONZE FITTED		
	STANDARD PUMP CONSTRUCTION		OPTIONAL 125# or 250#
	125# Flange	250# Flange	
Casing	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Cover	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Impeller	Bronze ASTM B584 ALLOY C83600 or C84400	Bronze ASTM B584 ALLOY C83600 or C84400	N/A
Wear Ring	N/A	N/A	Bronze ASTM B584-98A C92200
Shaft	Carbon Steel	Carbon Steel	N/A
Shaft Sleeve	Bronze ASTM B584-98A C92200	Bronze ASTM B584-98A C92200	Stainless Steel TYPE 303 ASTM A276
Mechanical Seal	Ceramic/EPT	Ceramic/EPT	Tungsten Carbide/EPT or Silicon Carbide/EPT
Seal Flush Line Assembly	N/A	N/A	Copper & Brass C3600

N/A - Not Available

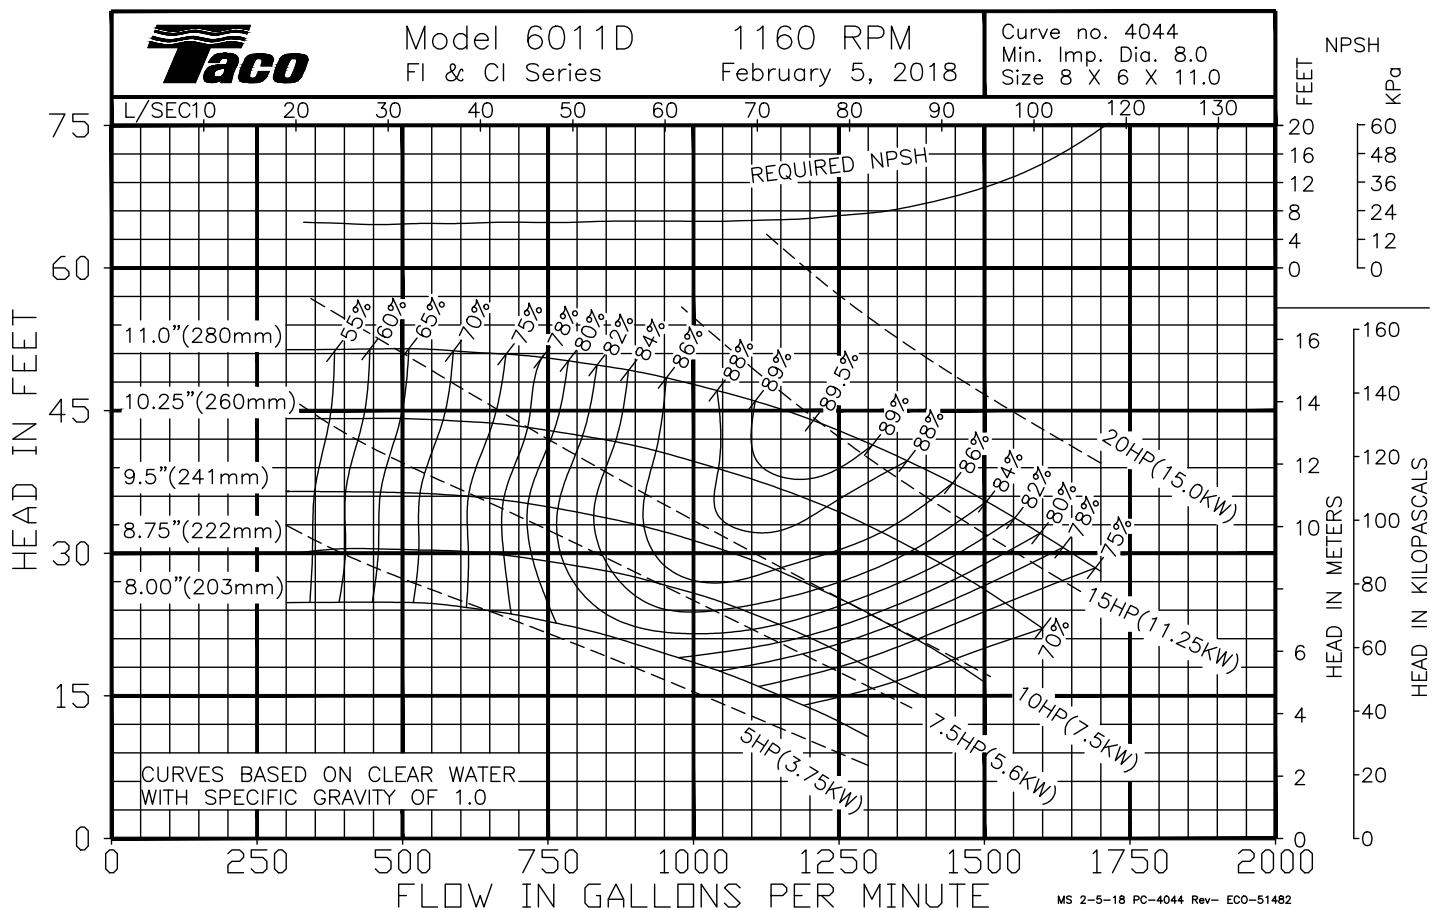

Comments: _____

Taco Comfort Solutions A Taco Family Company

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2017 Taco, Inc.





Submittal Data Information

CI Series Pumps (50 Hz)

301-1389D I

EFFECTIVE: APRIL 30, 2018

SUPERSEDES: NEW


1450 RPM MODEL 6011D

JOB _____ ENGINEER _____

CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

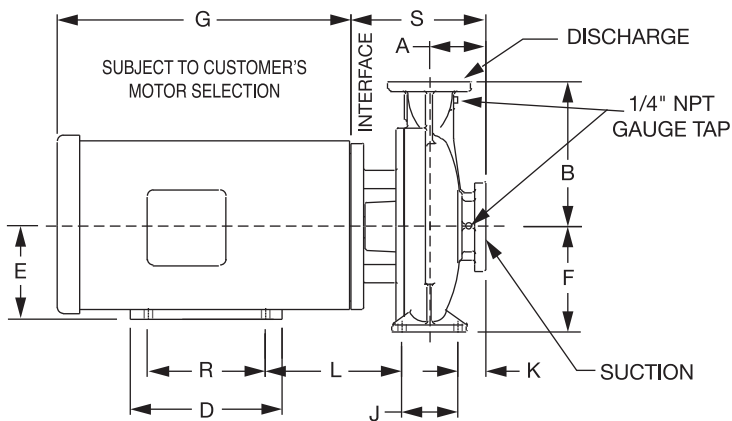

OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)


Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
254JM - 256JM	760 (345)
284JM - 286JM	945 (429)
324JM - 326JM	1110 (504)

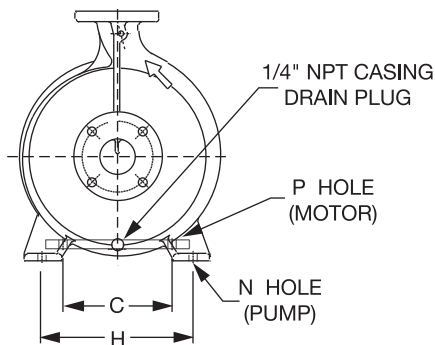

Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1450 (RPM)	A ANSI Class	B ANSI Class	K ANSI Class	S ANSI Class
6011 8 x 6 (203 x 152)	254JM	254JM	15	6.60 (168)	15.44 (392)	3.65 (93)	12.88 (327)
	256JM	256JM	20				
	284JM	284JM	25				
	286JM	286JM	30				
	324JM	324JM	40				

DIMENSIONS

50 Cycle Performance Curves attached when applicable.


Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1450 (RPM)	A ANSI Class	B ANSI Class	C (Motor)	D	E	F	G	H (Pump)	J	K ANSI Class	L	N (Pump)	P	R	S ANSI Class
6011D 8 x 6 (203 x 152)	254JM	254JM	15	6.10 (155)	15.00 (381)	10.0 (254)	9.50 (241)	6.25 (159)	12.40 (315)	16.19 (411)	17.72 (450)	5.90 (150)	3.15 (80)	8.32 (211)	0.63 (16)	0.53 (13)	8.25 (210)	12.38 (314)
	256JM	256JM	20			10.0 (254)	11.75 (298)	6.25 (159)		16.19 (411)				8.32 (211)		0.53 (13)	10.00 (254)	
	284JM	284JM	25			11.0 (279)	10.75 (273)	7.00 (178)		19.81 (503)				8.32 (211)		0.53 (13)	9.50 (241)	
	286JM	286JM	30			11.0 (279)	12.25 (311)	7.00 (178)		19.81 (503)				8.82 (224)		0.53 (13)	11.00 (279)	
	324JM	324JM	40			12.5 (318)	12.00 (305)	8.00 (203)		23.44 (595)				8.82 (224)		0.66 (17)	10.50 (267)	

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().
Do not use for construction purposes unless certified.

MATERIALS OF CONSTRUCTION

	BRONZE FITTED		
	STANDARD PUMP CONSTRUCTION		OPTIONAL 125# or 250#
	125# Flange	250# Flange	
Casing	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Cover	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Impeller	Bronze ASTM B584 ALLOY C83600 or C84400	Bronze ASTM B584 ALLOY C83600 or C84400	N/A
Wear Ring	N/A	N/A	Bronze ASTM B584-98A C92200
Shaft	Carbon Steel	Carbon Steel	N/A
Shaft Sleeve	Bronze ASTM B584-98A C92200	Bronze ASTM B584-98A C92200	Stainless Steel TYPE 303 ASTM A276
Mechanical Seal	Ceramic/EPT	Ceramic/EPT	Tungsten Carbide/EPT or Silicon- Carbide/EPT
Seal Flush Line Assembly	N/A	N/A	Copper & Brass C3600

N/A - Not Available

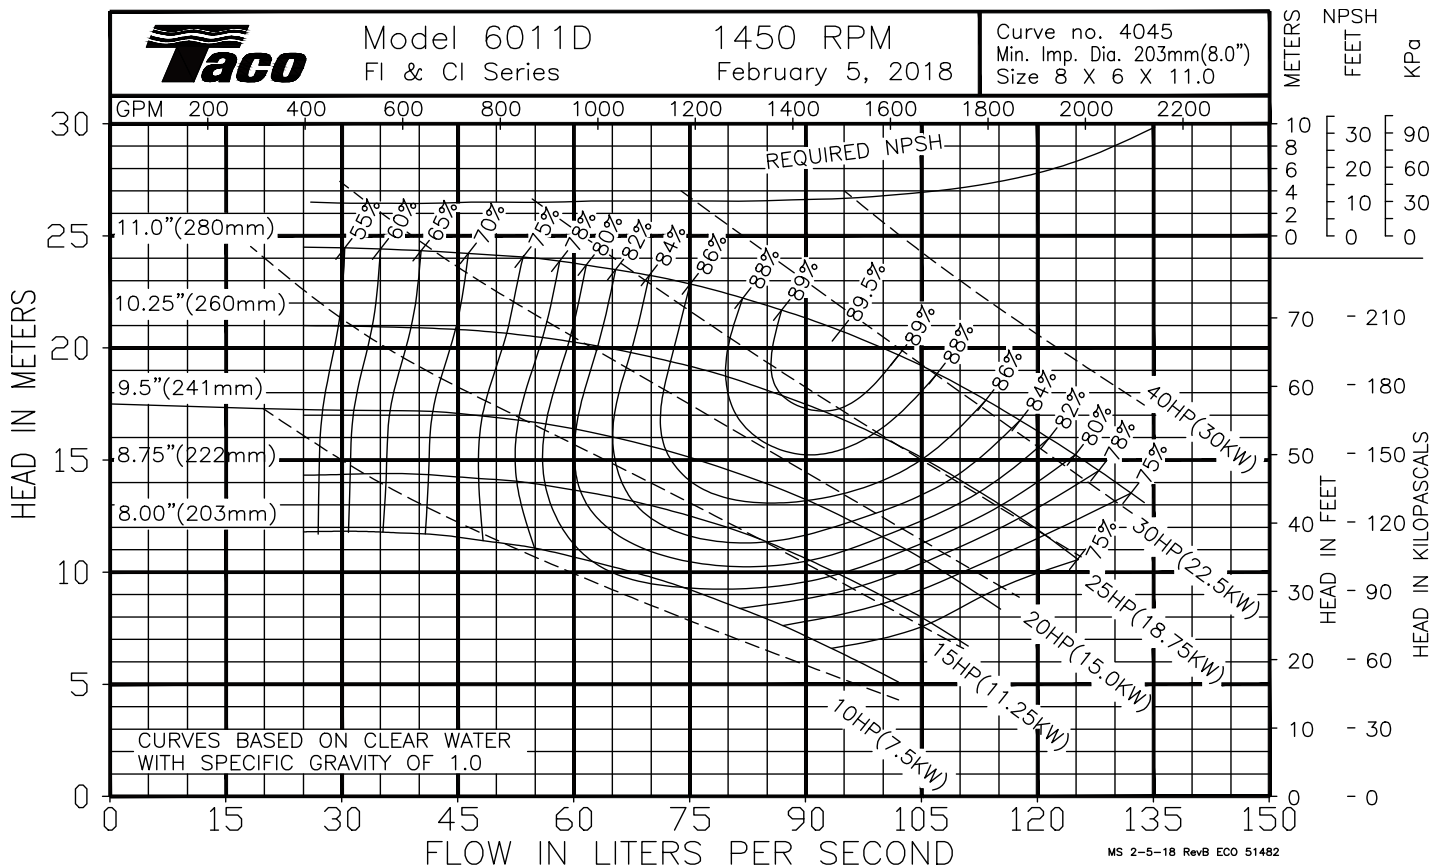

Comments: _____

Taco Comfort Solutions A Taco Family Company

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2017 Taco, Inc.



Submittal Data Information

CI Series Pumps

301-1342D

EFFECTIVE: APRIL 30, 2018

SUPERSEDES: NEW

1760 RPM MODEL 6011D


JOB _____

ENGINEER _____

CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

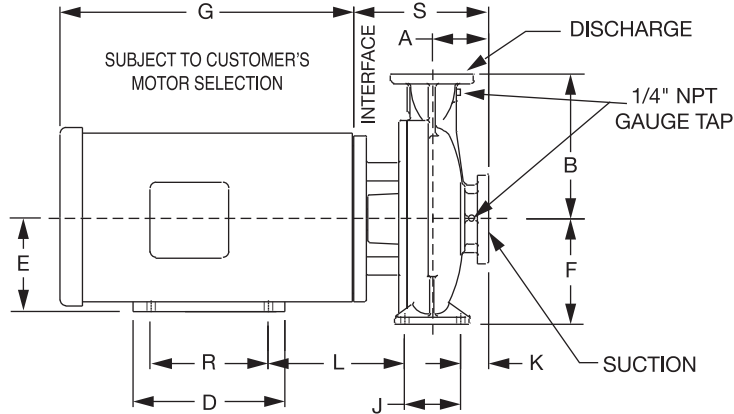

OPERATING SPECIFICATIONS

	Standard	Optional
Flange	ANSI Class 125	ANSI Class 250
Pressure	175 PSIG* (1210 KPA)	300 PSIG** (2070 KPA)
Temperature	250°F (120°C)	250°F (120°C)


Motors: All NEMA Standard (T Frame)

* In accordance with ANSI Standard B16.1 Class 125

** In accordance with ANSI Standard B16.1 Class 250 Dim.

MAXIMUM ASSEMBLY WEIGHT

Motor Frame	Weight Lbs (Kg)
254JM - 256JM	691 (313)
284JM - 286JM	859 (390)
324JM - 326JM	1010 (458)

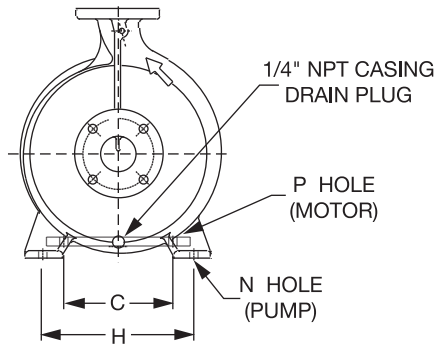

DIMENSIONS (250 PSI)

Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1760 (RPM)	A ANSI Class 250	B ANSI Class 250	K ANSI Class 250	S ANSI Class 250
6011 8 x 6 (203 x 152)	256JM	256JM	20	6.60 (168)	15.44 (392)	3.65 (93)	12.88 (327)
	284JM	284JM	25				
	286JM	286JM	30				
	324JM	324JM	40				
	326JM	326JM	50				
	326JM*	326JM*	60				

*NON STANDARD/STOCK MOTOR.

*FOR REPLACEMENT CONTACT TACO

DIMENSIONS

50 Cycle Performance Curves attached when applicable.

Model No. Flange Size (Suction x Discharge)	Motor Frame TEFC	Motor Frame ODP	HP 1760 (RPM)	A ANSI Class 125	B ANSI Class 125	C (Motor)	D	E	F	G	H (Pump)	J	K ANSI Class 125	L	N (Pump)	P	R	S ANSI Class 125
6011D 8 x 6 (203 x 152)	256JM	256JM	20	6.10 (155)	15.00 (381)	10.0 (254)	11.75 (298)	6.25 (159)	12.40 (315)	16.19 (411)	17.72 (450)	5.90 (150)	3.15 (80)	8.32 (211)	0.63 (16)	0.53 (13)	10.00(254)	12.38 (314)
	284JM	284JM	25			11.0 (279)	10.75 (273)	7.00 (178)		19.81 (503)				8.32 (211)		0.53 (13)	9.50 (241)	
	286JM	286JM	30			11.0 (279)	12.25 (311)	7.00 (178)		19.81 (503)				8.32 (211)		0.53 (13)	11.00(279)	
	324JM	324JM	40			12.5 (318)	12.00 (305)	8.00 (203)		23.44 (595)				8.82 (224)		0.66 (17)	10.50(267)	
	326JM	326JM	50			12.5 (318)	13.50 (343)	8.00 (203)		23.44 (595)				8.82 (224)		0.66 (17)	12.00(305)	
	326JM*	326JM*	60			12.5 (318)	13.50 (343)	8.00 (203)		24.78 (629)				8.82 (224)		0.66 (17)	12.00(305)	

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().

Do not use for construction purposes unless certified.


*NON STANDARD/STOCK MOTOR.

*FOR REPLACEMENT CONTACT TACO

MATERIALS OF CONSTRUCTION

	BRONZE FITTED		
	STANDARD PUMP CONSTRUCTION		OPTIONAL 125# or 250#
	125# Flange	250# Flange	
Casing	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Cover	Cast Iron ASTM A48/A48M-03 Class 30A	Ductile Iron ASTM A536-84 Grade 65-45-12	N/A
Impeller	Bronze ASTM B584 ALLOY C83600 or C84400	Bronze ASTM B584 ALLOY C83600 or C84400	N/A
Wear Ring	N/A	N/A	Bronze ASTM B584-98A C92200
Shaft	Carbon Steel	Carbon Steel	N/A
Shaft Sleeve	Bronze ASTM B584-98A C92200	Bronze ASTM B584-98A C92200	Stainless Steel TYPE 303 ASTM A276
Mechanical Seal	Ceramic/EPT	Ceramic/EPT	Tungsten Carbide/EPT or Silicon- Carbide/EPT
Seal Flush Line Assembly	N/A	N/A	Copper & Brass C3600

N/A - Not Available

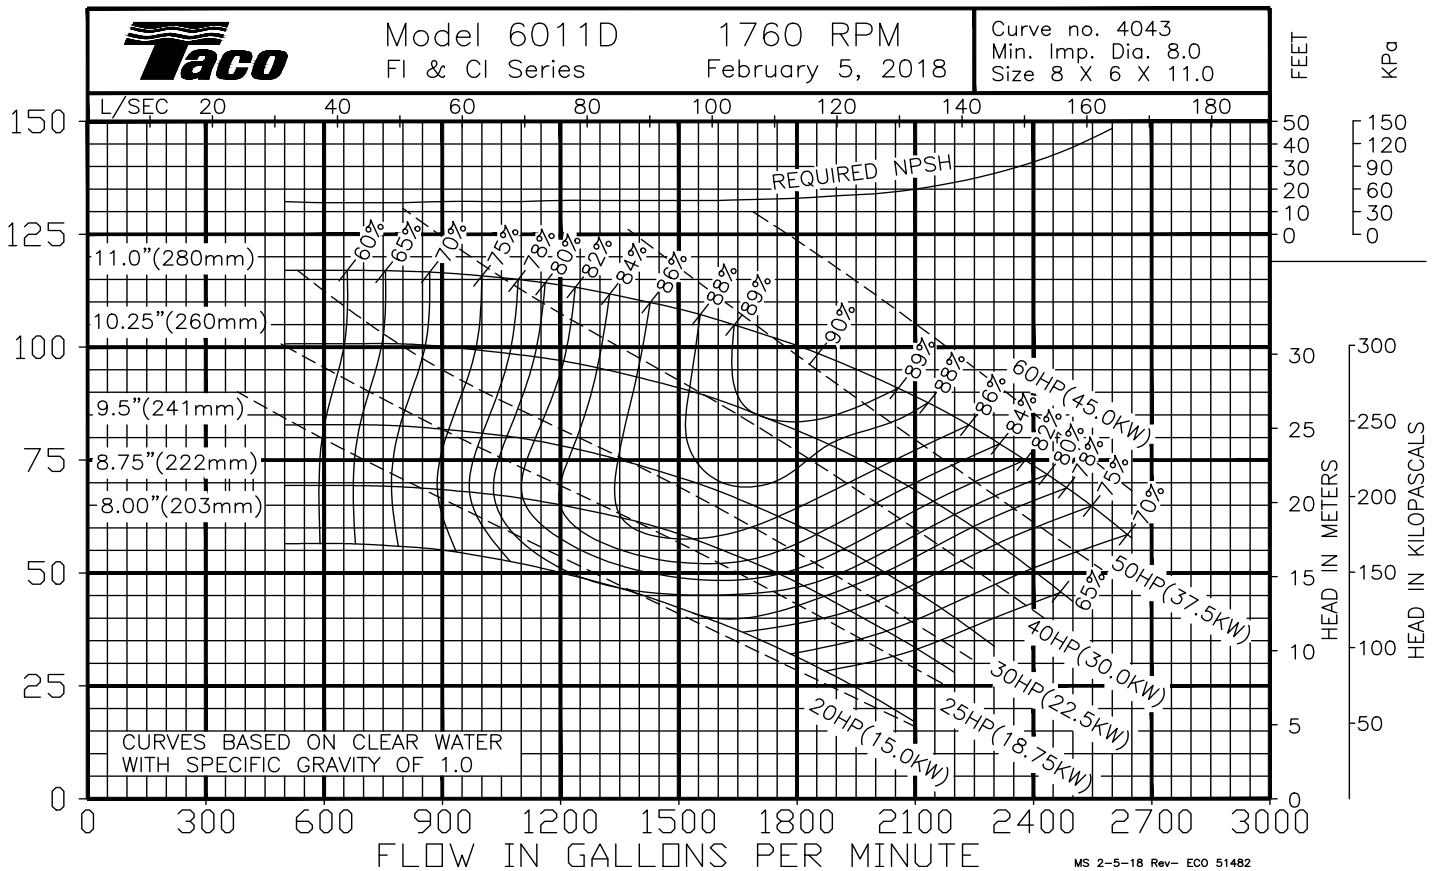

Comments: _____



Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2017 Taco, Inc.

