

## ■ Product Pictures



- Philips Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V;
- Cast aluminium cooling design better cooling, better cooling, light quality, LED Tj < 85°C.
- Excellent Optic design, greatly improved the light utilization and evenness.
- **Photocell Control**



**PHILIPS**  
**LUMILEDS**


**5** YEAR  
WARRANTY

## ■ Product Applications

LPT LED WALL PACK Lighting series can be widely used in indoor or outdoor lighting (Wet location), like mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booth, waiting rooms, the platforms of railway station, indoor stadiums and flower cultivating tents etc.

## ■ Structure Features


- **Shell materials: Aluminum & PC .** **Color: Black**
- **Net weight: 1.50Kg** **Unit: inch (mm)**

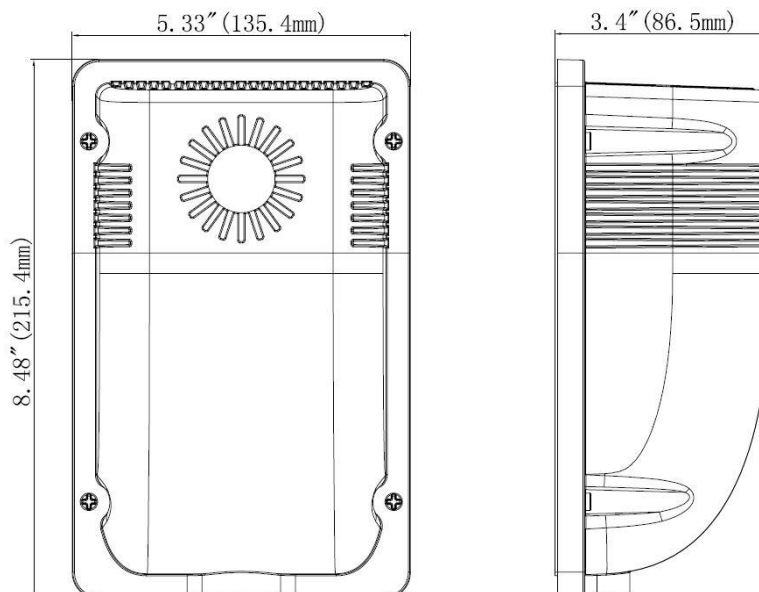

## ■ Technical Parameters

Type	90162		
Power	20W	Lighting Angle	80° *100°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	2400 Lm	Storage Temperature	-40 -+80°C
Color Temperature	4000K/5000K	Protection Level	Wet Location/IP65
CRI	Ra>80	Cable	3 core, 18AWG inside
Turn-on Light Level	10-20Lux	Turn-off Light Level	30-60Lux
Action time	5-20sec	Electrical Life	>5000cycles

## ■ Light Distribution Curve (Clear Lens)

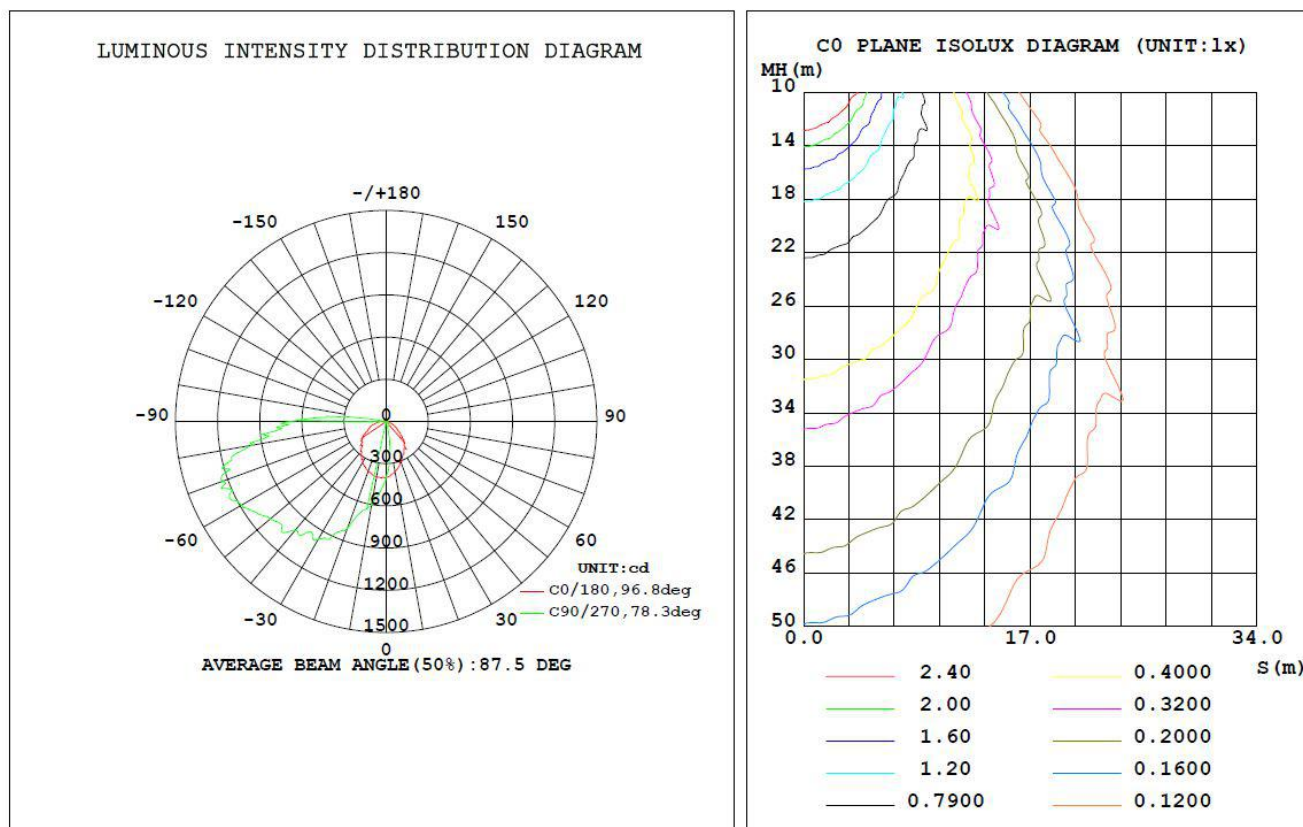

## ■ ORDERING INFORMATION:

Code: 90162

LPT	GWP	20W	27	50K	P
Company	Product	Power	Voltage	Color Temp	Control
LPT	WP Wall Pack	(20W)	27 AC120-277V	30K (3000K) 40K (4000K) 50K (5000K) 57K (5700K) ± 500K	P 120-277V Photocell

## ■ Product Certifications

