

Gocator® 2410/2420

ALL-IN-ONE 3D SMART SENSORS

Gocator 2410 and 2420 3D smart sensors are designed for the exacting demands of electronics and medical component inspection. With the latest 2 MP imaging technology and a new processor, these sensors achieve fast scan speeds, the highest X resolution in the industry and excellent Z repeatability (0.2 μm). Plus, their use of blue lasers means they generate “cleaner” data and highly reliable results even on shiny surfaces.

- PRE-CALIBRATED TO SCAN MICRON-LEVEL DETAILS
- X RESOLUTION DOWN TO 6 μm
- DOUBLE THE SPEED OF GOCATOR 2300
- SETUP & CONTROL VIA WEB BROWSER OR SDK
- BUILT-IN TOOLS, NO PROGRAMMING
- EXTEND WITH GDK AND ACCELERATOR

TAKE MICRON-LEVEL MEASUREMENTS


Measure micron level features with the 2400's 2 megapixel camera and large field of view. Scan parts for even the smallest defects and achieve superior results for 3D quality inspection.

INSPECT WITH SPEED AND PRECISION

Faster scan and acquisition speeds empower you to speed up your inline process and use higher resolutions. It also means multiple exposures can be used to accurately measure high-contrast targets. With an X resolution down to 6 μm , you can generate data points even on very tiny edges or narrow gaps.

LEVERAGE A GREATER MEASUREMENT RANGE

Accomplish more with fewer sensors, while still capturing the finest surface and edge details of electronics and small parts with the 2400's large field of view. Its deep measurement range lets you handle a wider variety of parts at production speed.

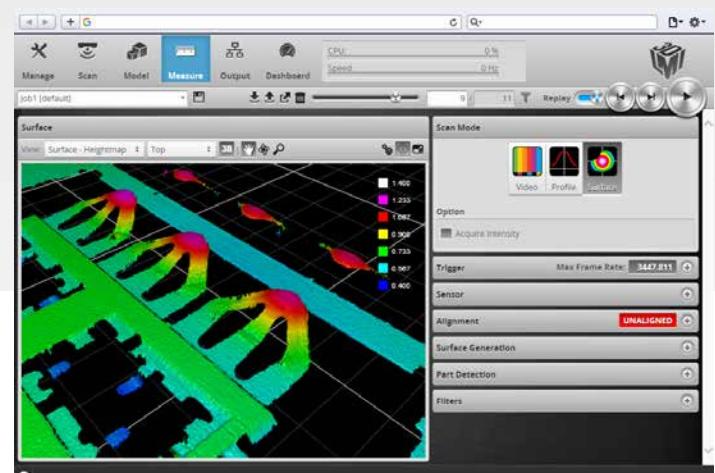

Gocator's browser-based graphical user interface

EASY TO INTEGRATE INTO TIGHT SPACES AND EXISTING SYSTEMS

A small footprint and lightweight body make this sensor ideal for fitting into tight spaces and mounting on robotic arms.

EASY TO SET UP AND USE

Gocator's built-in GUI allows for flexible configuration of settings and measurement tools using any web browser, computer or operating system. With no additional software to install, Gocator's out-of-the-box setup and configuration is fast and easy.

GOCATOR 2400 SERIES MODELS		2410	2420
Data Points / Profile		1710	1940
Linearity Z (+/- % of MR)		0.005	0.006
Resolution Z (µm)		1.1	1.8 - 3.0
Resolution X (µm) (Profile Data Interval)		5.8 - 6.2	14.0 - 16.5
Repeatability Z (µm)		0.2	0.4
Clearance Distance (CD) (mm)		19	60
Measurement Range (MR) (mm)		6	25
Field of View (FOV) (mm)		9.6 - 10.6	27 - 32
Recommended Laser Class		3R (blue, 405 nm)	3R (blue, 405 nm)
Available Laser Classes		2M (blue, 405 nm)	2M (blue, 405 nm)
Dimensions (mm)		44x90x145	44x90x145
Weight (kg)		0.88	0.88


Optical models, laser classes, and packages can be customized. Contact LMI for more details.

Specifications stated are based on Recommended laser classes. Linearity Z, Resolution Z, and Repeatability Z may vary for other laser classes.

Specifications for Gocator 2410 are preliminary.

ALL 2400 SERIES MODELS

Scan Rate	200 Hz (expanded full window), 400 Hz (G23xx equivalent full window), up to 5 kHz
Interface	Gigabit Ethernet
Inputs	Differential Encoder, Laser Safety Enable, Trigger
Outputs	2x Digital output, RS-485 Serial (115 kBaud), 1x Analog Output (4 - 20 mA)
Input Voltage (Power)	+24 to +48 VDC (9 Watts); RIPPLE +/- 10%
Housing	Gasketed aluminum enclosure, IP67
Operating Temperature	0 to 50°C
Storage Temperature	-30 to 70°C
Vibration Resistance	10 to 55 Hz, 1.5 mm double amplitude in X, Y and Z directions, 2 hours per direction
Shock Resistance	15 g, half sine wave, 11 ms, positive and negative for X, Y and Z directions
Scanning Software	Browser-based GUI and open source SDK for configuration and real-time 3D visualization. Open source SDK, native drivers, and industrial protocols for integration with user applications, third-party image processing applications, and PLCs.

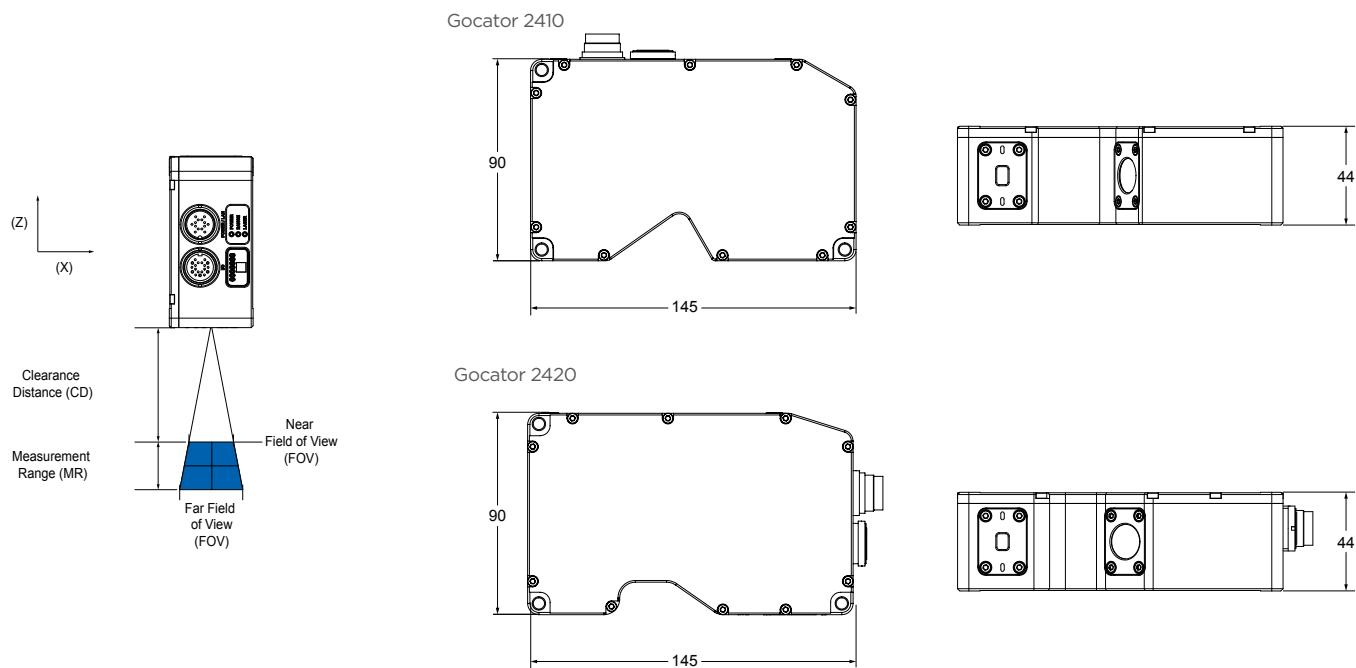

AMERICAS

LMI Technologies (Head Office)
Vancouver, Canada
+1 604 636 1011

EMEAR

LMI Technologies GmbH
Berlin, Germany
+49 (0)3328 9360 0

ASIA PACIFIC

LMI (Shanghai) Trading Co., Ltd.
Shanghai, China
+86 21 5441 0711

LMI Technologies has sales offices and distributors worldwide. All contact information is listed at Imi3D.com/contact/locations

