



PROTEUS

Infinite possibilities

MODULE PLATFORM

The world's first Arbitrary Waveform Transceiver

Introducing Tabor's all new Proteus series, the world's first Arbitrary Waveform Transceiver. Based on a PXIe platform, the system integrates the ability to transmit, receive and perform digital signal processing all in a single instrument. The modular, compact and cost effective system offers industry leading performance, various configuration options, an innovative task oriented programming, and user programmable FPGA. So whether it is for aerospace and defense, telecommunications, automotive, medical or high-end physics applications Proteus opens the door to a world of infinite possibilities.

Leading Features:



Dual or Four channel 1.25GS/s & 2.5GS/s 16 bit, or Dual channel 9GS/s having 16 bit AWG & AWT configurations



Integrated NCO for digital upconverting to microwave frequencies



Real time data streaming directly to the FPGA for continuous and infinite waveform generation.



9GHz Bandwidth, 2.7GS/s 12 bit digitizer option for feedback control system and conditional waveform generation

Innovative task oriented sequence programming for maximum flexibility to generate any imaginable scenario

Up to 16GS/s waveform memory with the ability to simultaneously generate and download waveforms.




Excellent phase noise and spurious performance

User customizable FPGA for demodulation, digital filtering and application specific



High speed PCIe GEN3x8 lanes communication interface

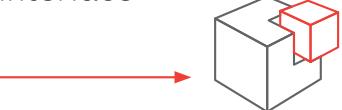

Modular and space efficient PXI Express platform, easily scalable to hundreds of channels.



MODULE PLATFORM

PROTEUS
Infinite possibilities

Modular, scalable and compact


Based on PXI Express industry standard the modular architecture can easily scale to hundreds of channels, while keeping the required space to a minimum. The compact form size enables up to 4 generator output channels and 2 digitizer input channels to occupy only 3 PXI slots. So for synchronized, phase coherent, multi-channel applications such as quantum physics and radar applications the Proteus arbitrary waveform transceiver is an ideal, space efficient and cost effective solution.

Ultra-fast communication interface

Spending more time setting up your generated scenario than actually running it? The PCI Express Gen 3 x8 lanes connection enables up to 64Gb/s of data transfer speed. This enables the Proteus arbitrary waveform transceiver to offer the fastest waveform download available on the market today, saving you one of your most valuable resources, time.

Feedback control system

Many of today's applications, require conditional waveform generation depending on input signals from the environment. The Proteus arbitrary waveform transceiver flawlessly integrates both DAC and ADC in one system, controlled by a single FPGA for optimal synchronization and minimum latency. This high speed control system provides a feedback loop for fast decision making on the fly with minimum latency.

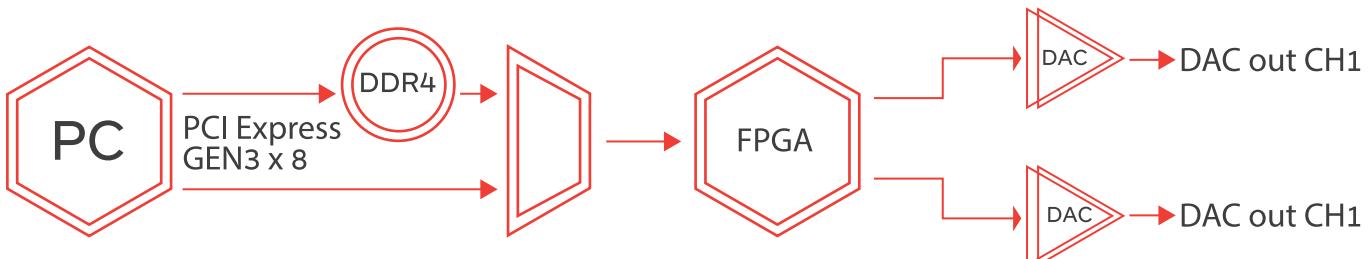

Generate any imaginable scenario

The new series offers an innovative task oriented sequence programming where user can change the full instrument set up at every line of the task table. In addition, not only can users of the Proteus series instruments generate and download waveforms simultaneously, they can stream data directly to the FPGA without the need to use the built in memory. This enables generating random, unique and infinitely long scenarios directly from the controlling PC at DAC speeds of up to 9GS/s. So no matter whether your scenario is extremely complex, infinite or even dynamic you can generate it with the Proteus series model

PROTEUS

Infinite possibilities

GENERAL CHARACTERISTICS	P9082M	P2582M	P2584M	P1282M	P1284M
MAX. SAMPLE RATE	9GS/s	2.5GS/s		1.25GS/s	
RESOLUTION			16-bit ⁽¹⁾		
ENOB AT MAX. FREQUENCY			TBD		
NUMBER OF CHANNELS	2	2	4	2	4
BANDWIDTH	9GHz ⁽²⁾ 4.5GHz ⁽³⁾		5GHz ⁽²⁾ 2.5GHz ⁽³⁾		2.5GHz ⁽²⁾ 1.25GHz ⁽³⁾
MEMORY	Up to 16GS		Up to 8GS		Up to 4GS
INTERFACE			PXI Express Gen.3 x8 lanes		
LATENCY / SYSTEM DELAY			200ns		
FINE DELAY			-5ns to 5ns		
DELAY RESOLUTION			5ps resolution		
COARSE DELAY			0 to wavelength in 1 sample point resolution		
INITIAL SKEW BETWEEN CHANNELS			0ps		

(1) Depending on sampling mode (2) Direct output option (3) DC output option

ARBITRARY / TASK TABLE	P9082M	P2582M	P2584M	P1282M	P1284M
MINIMUM SEGMENT LENGTH					
NORMAL	2048 points		1024 points		1024 points
FAST SEGMENT	128 points		64 points		64 points
WAVEFORM GRANULARITY					
STANDARD	64 points		32 points		32 points
OPTIONAL	32 points		16 points		16 points
SEGMENTS			2 ¹⁵		
SEGMENT LOOPS			2 ²⁰		
SEQUENCES			2 ¹⁵		
SEQUENCE TABLE ENTRIES			2 ¹⁵		
SEQUENCE LOOPS			2 ²⁰		
ADVANCED SEQUENCES TABLE ENTRIES			1024		

SIGNAL PURITY	DC OUTPUT	DIRECT OUTPUT
HARMONIC DISTORTION		
fout = 100 MHz	<-75 dBc (typ)	<-80 dBc (typ)
fout = 10 MHz - 500 MHz, DC to 2 GHz	<-70 dBc (typ)	<-75 dBc (typ)
fout = 10 MHz ... 3 GHz, DC to 4.5 GHz	<-65 dBc (typ)	<-70 dBc (typ)
fout = 10 MHz ... 7 GHz, 5 to 10 GHz		TBD
SFDR		
fout = 10 MHz...1 GHz DC to 1 GHz	-85 dBc (typ)	<-85 dBc (typ)
fout = 1 GHz...3 GHz , DC to 3 GHz	-75 dBc (typ)	<-75 dBc (typ)
fout = 3 GHz...4.5 GHz , DC to 4.5 GHz	-65 dBc (typ)	<-65 dBc (typ)
fout = 3 GHz...4.5 GHz , DC to 4.5 GHz	100us Full bandwidth	<-70 dBc (typ)
fout = 7 GHz, 6 to 8 GHz (2nd Nyquist)	<6us Narrow bandwidth (<10% BW)	<-70 dBc (typ)
PHASE NOISE (@10kHz offset)		
fout = 187.5MHz	-130 dBc/Hz	
fout = 375MHz	-125 dBc/Hz	
fout = 750MHz	-120 dBc/Hz	
fout = 2GHz - 5GHz	-110 dBc/Hz	
fout = 5GHz - 7GHz	-105 dBc/Hz	



PROTEUS

Infinite possibilities

DC OUTPUT		DIRECT OUTPUT (OPTIONAL)			
OUTPUT TYPE	Single-ended or differential, DC-coupled	OUTPUT TYPE	Single-ended or differential, AC coupled		
IMPEDANCE	50 Ω (nom)	IMPEDANCE	50 Ω (nom)		
AMPLITUDE	100 mVp-p to 1.2 Vp-p	AMPLITUDE	600mVpp, single-ended into 50 Ω		
AMPLITUDE RESOLUTION	±(3% of amplitude ±2 mV)	AMPLITUDE RESOLUTION	1mV		
VOLTAGE WINDOW	±2V	AMPLITUDE ACCURACY	±(3% of amplitude ±2 mV)		
OFFSET RESOLUTION	1mV	BANDWIDTH	-3dB analog BW 2ND Nyquist zone BW	100 kHz to 4.5 GHz (typ) Up to 9GHz	
DC OFFSET ACCURACY	±(2.0% of offset±10 mV)	CONNECTOR TYPE		SMA	
SKEW BETWEEN NORMAL AND COMPLEMENT OUTPUTS	0 ps	REFERENCE CLOCK OUTPUT			
RISE/FALL TIME (20% TO 80%)	<150 ps (typ)	FREQUENCY	10MHz / 100MHz selectable		
JITTER (PEAK-PEAK)	<15 ps (typ)	CONNECTOR	SMP		
OVERSHOOT	<5% (typ)				
CONNECTOR TYPE	SMA				
MARKER OUTPUTS		P9082M	P2582M	P2584M	P1282M
NUMBER OF MARKERS	8	8	8	8	4
OUTPUT TYPE				Single Ended	
OUTPUT IMPEDANCE				50 Ω (nom)	
LEVEL				100 mVp-p to 1.2 Vp-p with 40mV resolution	
RISE/FALL TIME (20% TO 80%)				<400ps	
MARKER TO DIRECT/DC OUT				<1SCLK	
WIDTH				User defined, in points	
DELAY CONTROL				Position control in points	
RANGE				0 - waveform length	
RESOLUTION	8 points			2 points	
CONNECTOR TYPE				SMP	
SYNC CLOCK OUTPUT			SAMPLE CLOCK OUTPUT		
FREQUENCY	1/64 of the sample clock frequency		SOURCE	Selectable, internal synthesizer or sample clock input	
CONNECTOR	SMP		FREQUENCY RANGE	SCLK Range	
			OUTPUT AMPLITUDE	400 mVpp (nom), fix	
			INPUT IMPEDANCE	50 Ω (nom), AC coupled	
			AMPLITUDE ACCURACY	±(3% of amplitude ±2 mV)	
			TRANSITION TIME (20% TO 80%)	20 ps (typ)	
			CONNECTOR	SMA	



PROTEUS

Infinite possibilities

TRIGGER/GATE AND EVENT INPUT		ORDERING INFORMATION	
INPUT RANGE	±5 V	MODEL	DESCRIPTION
THRESHOLD RANGE	-5 V to +5 V	P1282M	PXIe 1.25GS/s, 16Bit, AWG, 1GS Memory, 2CH, 4 Markers
RESOLUTION	100 mV	P1284M	PXIe 1.25GS/s, 16Bit, AWG, 1GS Memory, 4CH, 4 Markers
SENSITIVITY	200 mV	P2582M	PXIe 2.5GS/s, 16Bit, AWG, 1GS Memory, 2CH, 8 Markers
JITTER @ MAX CLOCK	3.2ns (200ps optional)	P2584M	PXIe 2.5GS/s, 16Bit, AWG, 1GS Memory, 4CH, 8 Markers
POLARITY	Pos or Neg	P9082M	PXIe 9GS/s, 16 Bit AWG, 4GS Memory, 2CH, 8 Markers
DRIVE	Selectable channel 1, channel 2 or both	OPTION	DESCRIPTION
INPUT IMPEDANCE	1 k or 50 Ω (nom), DC coupled	4M1	4GS Memory option for models P1282M and P2582M
MAX TOGGLE FREQUENCY	TBD	4M2	4GS Memory option for models P1284M and P2584M
MINIMUM PULSE WIDTH	TBD	8M1	8GS Memory option for models P1282M and P2582M
CONNECTOR TYPE	SMP	8M2	8GS Memory option for models P1284M, P2584M and P9082M
FAST SEGMENT DYNAMIC CONTROL INPUT (OPTIONAL)		16M1	16GS Memory option for models P9082M
NUMBER OF ADDRESSABLE SEGMENTS OR SEQUENCES	256	DO1	9GHz BW Direct Output option for models P1282M and P2582M
DATA RATE	TBD	DO2	9GHz BW Direct Output option for models P1284M, P2584M and P9082M
SET-UP TIME	TBD	FS1	Fast Segment Control option for models P1282M and P2582M
HOLD TIME	TBD	FS2	Fast Segment Control option for models P1284M, P2584M and P9082M
INPUT RANGE LOW LEVEL	0 V to +0.7 V	MRK1	x8 Extra Markers option for models P1282M and P2582M
HIGH LEVEL	+1.6 V to +3.6 V	MRK2	x8 Extra Markers option for models P1284M, P2584M and P9082M
IMPEDANCE	TBD	LTJ1	Ultra Low Trigger Jitter (200ps typ.) option for models P1282M and P2582M
CONNECTOR	TBD	LTJ2	Ultra Low Trigger Jitter (200ps typ.) option for models P1284M, P2584M and P9082M
REFERENCE CLOCK INPUT		G1	Low Waveform Granularity option for models P1282M and P2582M
INPUT FREQUENCIES	10MHz / 100MHz selectable	G2	Low Waveform Granularity option for models P1284M, P2584M and P9082M
LOCK RANGE	± 1MHz	AWT1	9GHz BW, 2.7GS/s 12 Bit 1CH Digitizer option for models P1282M and P2582M
INPUT LEVEL	0.2 Vp-p to 3.0 Vp-p	AWT2	9GHz BW, 2.7GS/s 12 Bit 1CH Digitizer option for models P1284M, P2584M and P9082M
IMPEDANCE	50 Ω, AC coupled (nom)	FPGA PROG	FPGA Programming Capability with built-in Demodulation and digital Filters
CONNECTOR TYPE	SMP	ARTIQ Core	ARTIQ Core integration to allow simply FPGA control & programming
SAMPLE CLOCK INPUT			
FREQUENCY RANGE	SCLK Range		
INPUT POWER RANGE	+0 dBm to +7 dBm		
DAMAGE LEVEL	+8 dBm		
INPUT IMPEDANCE	50 Ω nom, AC coupled		
CONNECTOR TYPE	SMA		