

IT'S AS EASY AS 1, 2, 3, 4.

# QWIKMOD SERIES

1

## BRIGHTER

- Lumen output range of 110-260LM/ft



2

## EASY TO USE

- Qwik Release Tab
- Smart Packaging: One Bag, One Power Supply
- 4 modules for any sign



3

## PERFORMANCE & RELIABILITY


- Integrated aluminum heatsink
- Waterproof IP68
- Diamondback 170° Optic Lens
- Low Profile Design



4

## COST EFFECTIVE

- Most cost competitive module family in the industry



### RECOMMENDED COVERAGE CHART

Depth	Max. Stroke	Row Spacing	Product
	Single Row	Multi-Rows O.C.	
2"	6"	2" at 6 mods/ft	QM1
3"	8"	4" at 3 mods/ft	QM1/QM2/QM3/QM4
4"	12"	7"	QM1
4"	12"	7" at 2 mods/ft	QM2/QM3/QM4
5"	16"	10"	QM2/QM3/QM4
6"	18"	10"	QM2
6"	18"	12"	QM3/QM4
7"	22"	12"	QM3
7"	22"	14"	QM4
8"	24"	18"	QM4

Note: Product and depth may vary depending on face material and desired brightness.

Contact your Sign Supply Distributor for availability.




www.p-led.com  
 (325) 227-4577  
 3490 Venture Drive, San Angelo, Texas 76905  
 info@p-led.com

Qwik Mod Series

# QWIK MOD™ SERIES

Better coverage with a wider optic—accomplish more with our NEW Qwik Mod™ Series.

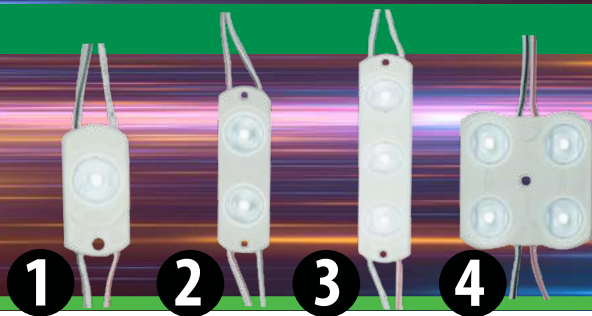

## SPECIFICATIONS

Beam Angle	170° Ultra-Wide Low Dome Batwing Optic with Diamondback Optic Lens Technology
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs
Dimensions	QM1: 0.69"W x 1.4"L x 0.25"H QM2: 0.69"W x 2.2"L x 0.25"H QM3: 0.69"W x 3.14"L x 0.25"H QM4: 1.7"W x 1.77"L x 0.25"H
Efficacy	See Product Options
Fastening	Peel & Stick / Mechanical Screw Hole
Input	12VDC
Intensity	See Product Options
Max Mods (Series)	See Product Options
Operating Temp	-30° to +60°C
Packaging	QM1: 60 ft. (150 mods) per bag or 600 ft. (1500 mods) per case QM2: 44.7 ft. (76 mods) per bag or 536.52 ft. (912 mods) per case QM3: 33.3 ft. (50 mods) per bag or 500 ft. (750 mods) per case QM4: 25.3 ft. (38 mods) per bag or 608 ft. (912 mods) per case
Power	See Product Options
Power Supply	P-LED 12VDC
Protection Grade	IP68
Run Footage	See Product Options
Spacing	QM1: 2.5 mods/ft. (fully stretched) QM2: 1.7 mods/ft. (fully stretched) QM3: 1.5 mods/ft. (fully stretched) QM4: 1.5 mods/ft. (fully stretched)
Warranty	5 Year Product / 5 Year Limited Labor

## FEATURES

- Diamondback 170° Optic Lens
- Integrated aluminum heatsink
- Waterproof IP68
- Snap & Peel Qwik Release Tab
- 4 different mod styles to perform in a wide variety of sign applications
- More light diffusion with a wider batwing resulting in better coverage

## WIRING DETAILS

White/Red	Positive
White/Black	Negative



## PRODUCT OPTIONS

Color	Wavelength	Efficacy	Intensity	Power	Max Mods (Series)	Run Footage	Part Number*
True White	7100K	110 LM/W	44 LM/mod (110 LM/ft)	0.4W/MOD (1.0W/FT)	30 ft. (75 mods)	60 ft. (150 mods)	PL-QM1-TW110-P
True White	7100K	111 LM/W	89 LM/mod (150 LM/ft)	0.8W/MOD (1.36W/FT)	22.3 ft. (38 mods)	44.7 ft. (76 mods)	PL-QM2-TW150-P
True White	7100K	111 LM/W	133.5 LM/mod (200 LM/ft)	1.2W/MOD (1.8W/FT)	16.6 ft. (25 mods)	33.3 ft. (50 mods)	PL-QM3-TW200-P
True White	7100K	109 LM/W	174 LM/mod (260 LM/ft)	1.6W/MOD (2.4W/FT)	12.6 ft. (19 mods)	25.3 ft.(38 mods)	PL-QM4-TW260-P

\*"P" denotes lens factory installed.

