


Instruction Manual

insetta™
BY ASTERISK



Let's get your Insetta installed and working!

Each package includes

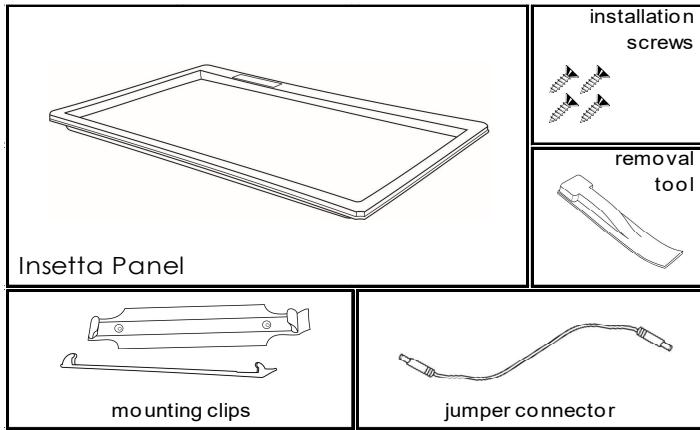

Maximum Lights per circuit



Power supply

You can connect up to 12 feet/144 inches worth of Insetta to one power supply by running the included jumper connector from one panel to the next.

Example: You have 6 24-inch wide cabinets spanning a space of 12 feet. You can install Insetta panels under each of those cabinets and link them with the jumper connector. But if you added another Insetta panel, you would need to get a separate power supply for it.

Also needed:

Drill with a 3/8" drill bit for wood

Screwdriver with a Phillips tip

Power supply which is sold separately (item # **POWA60**). This power supply can be installed anywhere near the cabinets, or inside the cabinet.

For Euro (frameless) style cabinets, a **Light Rail**, a small piece of wood that can be attached to the bottom of your cabinet and allow for under-cabinet lighting.

Contact your Kitchen contractor or supplier to purchase a light rail.


drilling and wires

Step 1

If only installing 1 Insetta, skip this step

If installing another Insetta in the adjacent cabinet, drill a 3/8" hole between the two cabinets.

The hole should be on the narrow strip of wood framing the underside of the cabinet, approximately an inch from the back wall. This hole will allow the jumper connector to travel from one Insetta to the other.

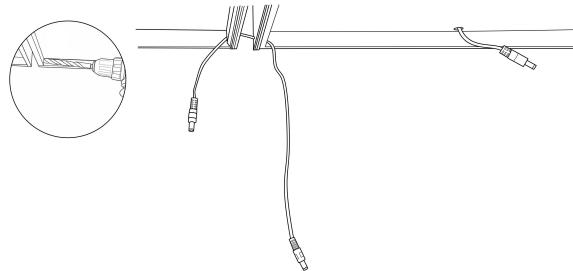


mounting clips

Step 2

a. Place the mounting clips into position on the left and right side of the cabinet cavity (if your Insetta comes with 3 clips, mount the third clip in the center). The front of the clips should be butted up against the backside of the cabinet face as shown.

b. Make sure to keep the clips perfectly aligned with the sides of the cabinet so that the Insetta can fit properly.

c. Fasten included screws into the cabinet bottom through each hole in the mounting clips. Repeat until all mounting clips are installed.

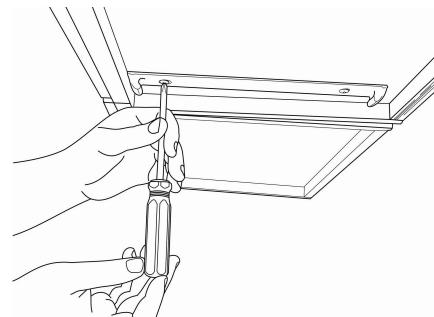


connect wiring

Step 3

a. Position the Insetta panel so the electricity connection (power hub) is towards the back of the cabinet, close to the counter backsplash.

b. Each power hub has two jacks on one side and one jack on the other side. Connect the power supply wire to the two-jack side of the power hub.

c. If connecting more panels - attach the jumper cable to either side of the power hub.

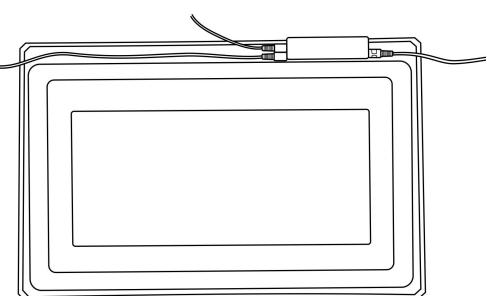


install Insetta

Step 4

a. Making sure to maintain the electrical connections, carefully position the Insetta panel below the mounting clips.

b. Insert the panel into the back hooks first, while making sure to prevent the wires from getting pinched between Insetta and the clips. While maintaining backward pressure, push the panel upwards, into the clips, until you hear a firm click.

c. Test each side of the panel to ensure that it is firmly mounted.

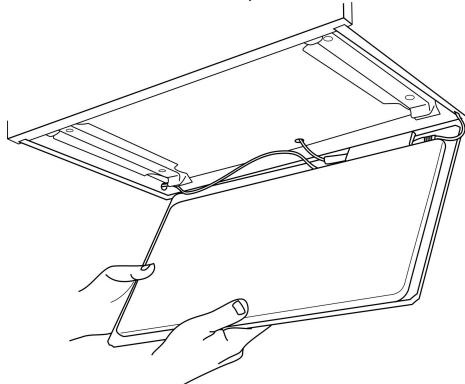


operating Insetta

Step 5

a. The metal touch plate engraved with the words "Insetta by Asterisk" is the control panel for the light.

b. To turn ON/OFF - tap the control panel once


c. To BRIGHTEN/DIM the light, hold the control panel for several seconds.

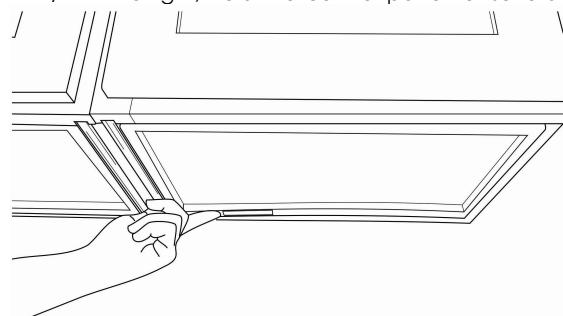

removing Insetta

Removal

Insert the removal tool between the light and the face of the cabinet. Slide it over to one side of the light until it reaches a mounting clip. Position one hand to push the tool in with one hand, and keep the other hand under the light to catch it if it falls.

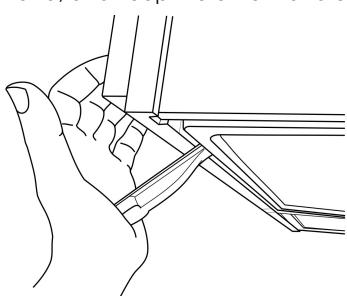


Push the Removal tool in between the light and the cabinet (as shown) until the light pops off.

ordering your lights


Measure

This is an 18" cabinet

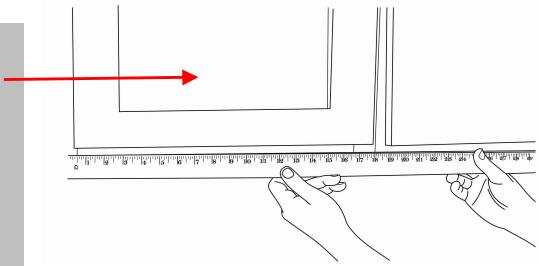

With a cavity width of 16 1/2"

Insetta Model #18 should be purchased

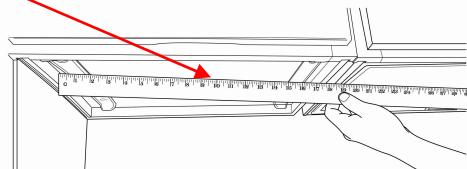

Cabinet Size	Cavity Width	Model Number
9 in.	7.5"	#9
12 in.	10.5"	#12
15 in.	13.5"	#15
18 in.	16.5"	#18
21 in.	19.5"	#21
24 in.	22.5"	#24
27 in.	25.5"	#27
30 in.	28.5"	#30
33 in.	31.5"	#15+ [#] Fill
36 in.	34.5"	#18+ [#] Fill
39 in.	37.5"	#21+ [#] Fill
42 in.	40.5"	#24+ [#] Fill
45 in.	43.5"	#27+ [#] Fill
48 in.	46.5"	#30+ [#] Fill
Corner	21.5x21.5"	#Corner

Insetta Fitment Guide
* #Fill is 18" wide, and is used in conjunction with standard sizes for cabinets 33" or greater

* * * * * * * * *
* * * * * * * * *
* * * * * * * * *

* There's more to see

info@asterisklighting.com | P 732.747.4353

WWW.ASTERISKLIGHTING.COM

544 PARK AVE, #209 | BROOKLYN, NY 11205