


PRIMEFLIGHTTM EQUIPMENT UNIT

FEATURES >

TRANSPORT HANDLE

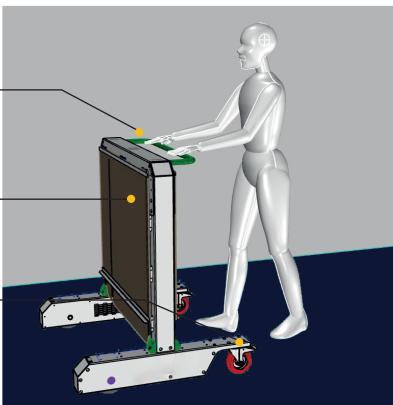

FOLDABLE BARRIER & UV RAY FILTER


BRAKES

OPTIONAL ADJUSTABLE HEIGHT STAND


UV LAMPS

CHASSIS, ELECTRIC COMPONENTS & MOTOR

DRIVING WHEELS

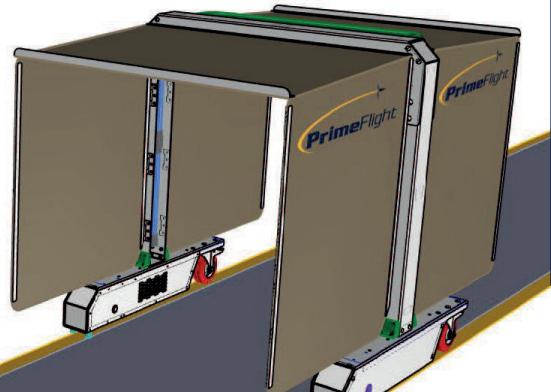

DIMENSIONS (INCHES) ^

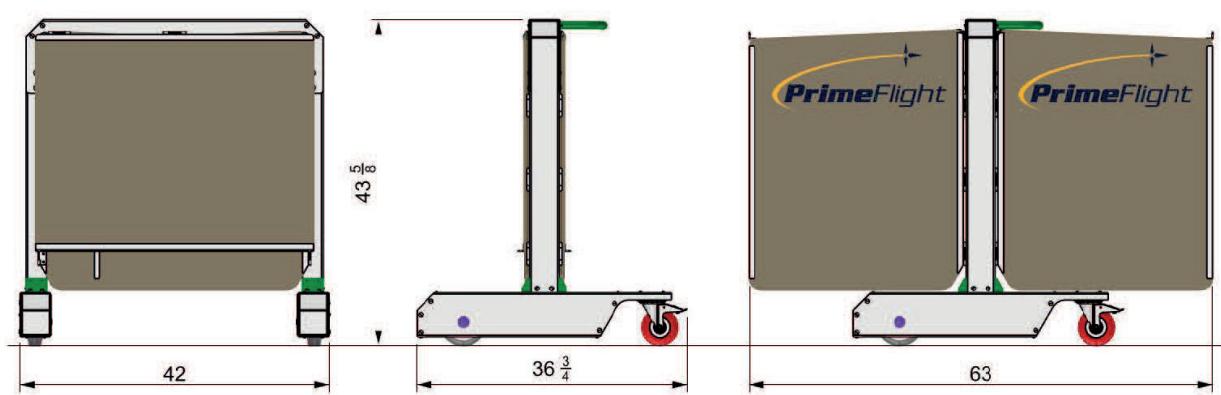

UNIT SPECS

- **Power Supply:** 120VAC/60Hz; plug
- **Lamp Wattage:** 55W
- **Lamp Lifespan:** Up to 10,000 hours or 1 year
- **Peak UV Output:** 254nm
- **UV Intensity:** 7800 cd @ 895mm per lamp
- **Time to Process:** 3-5 seconds
- **Operation:** Operator controls unit with a wired control, keeping a safe distance from the equipment
- Options: Can add wireless control functionality; can add auto-drive functionality

FOR MORE INFORMATION



primeflight.com/primeflightUV



info@primeflight.com

Patents Pending. Copyright©2020 PrimeFlight Aviation Services, Inc. All rights reserved.