




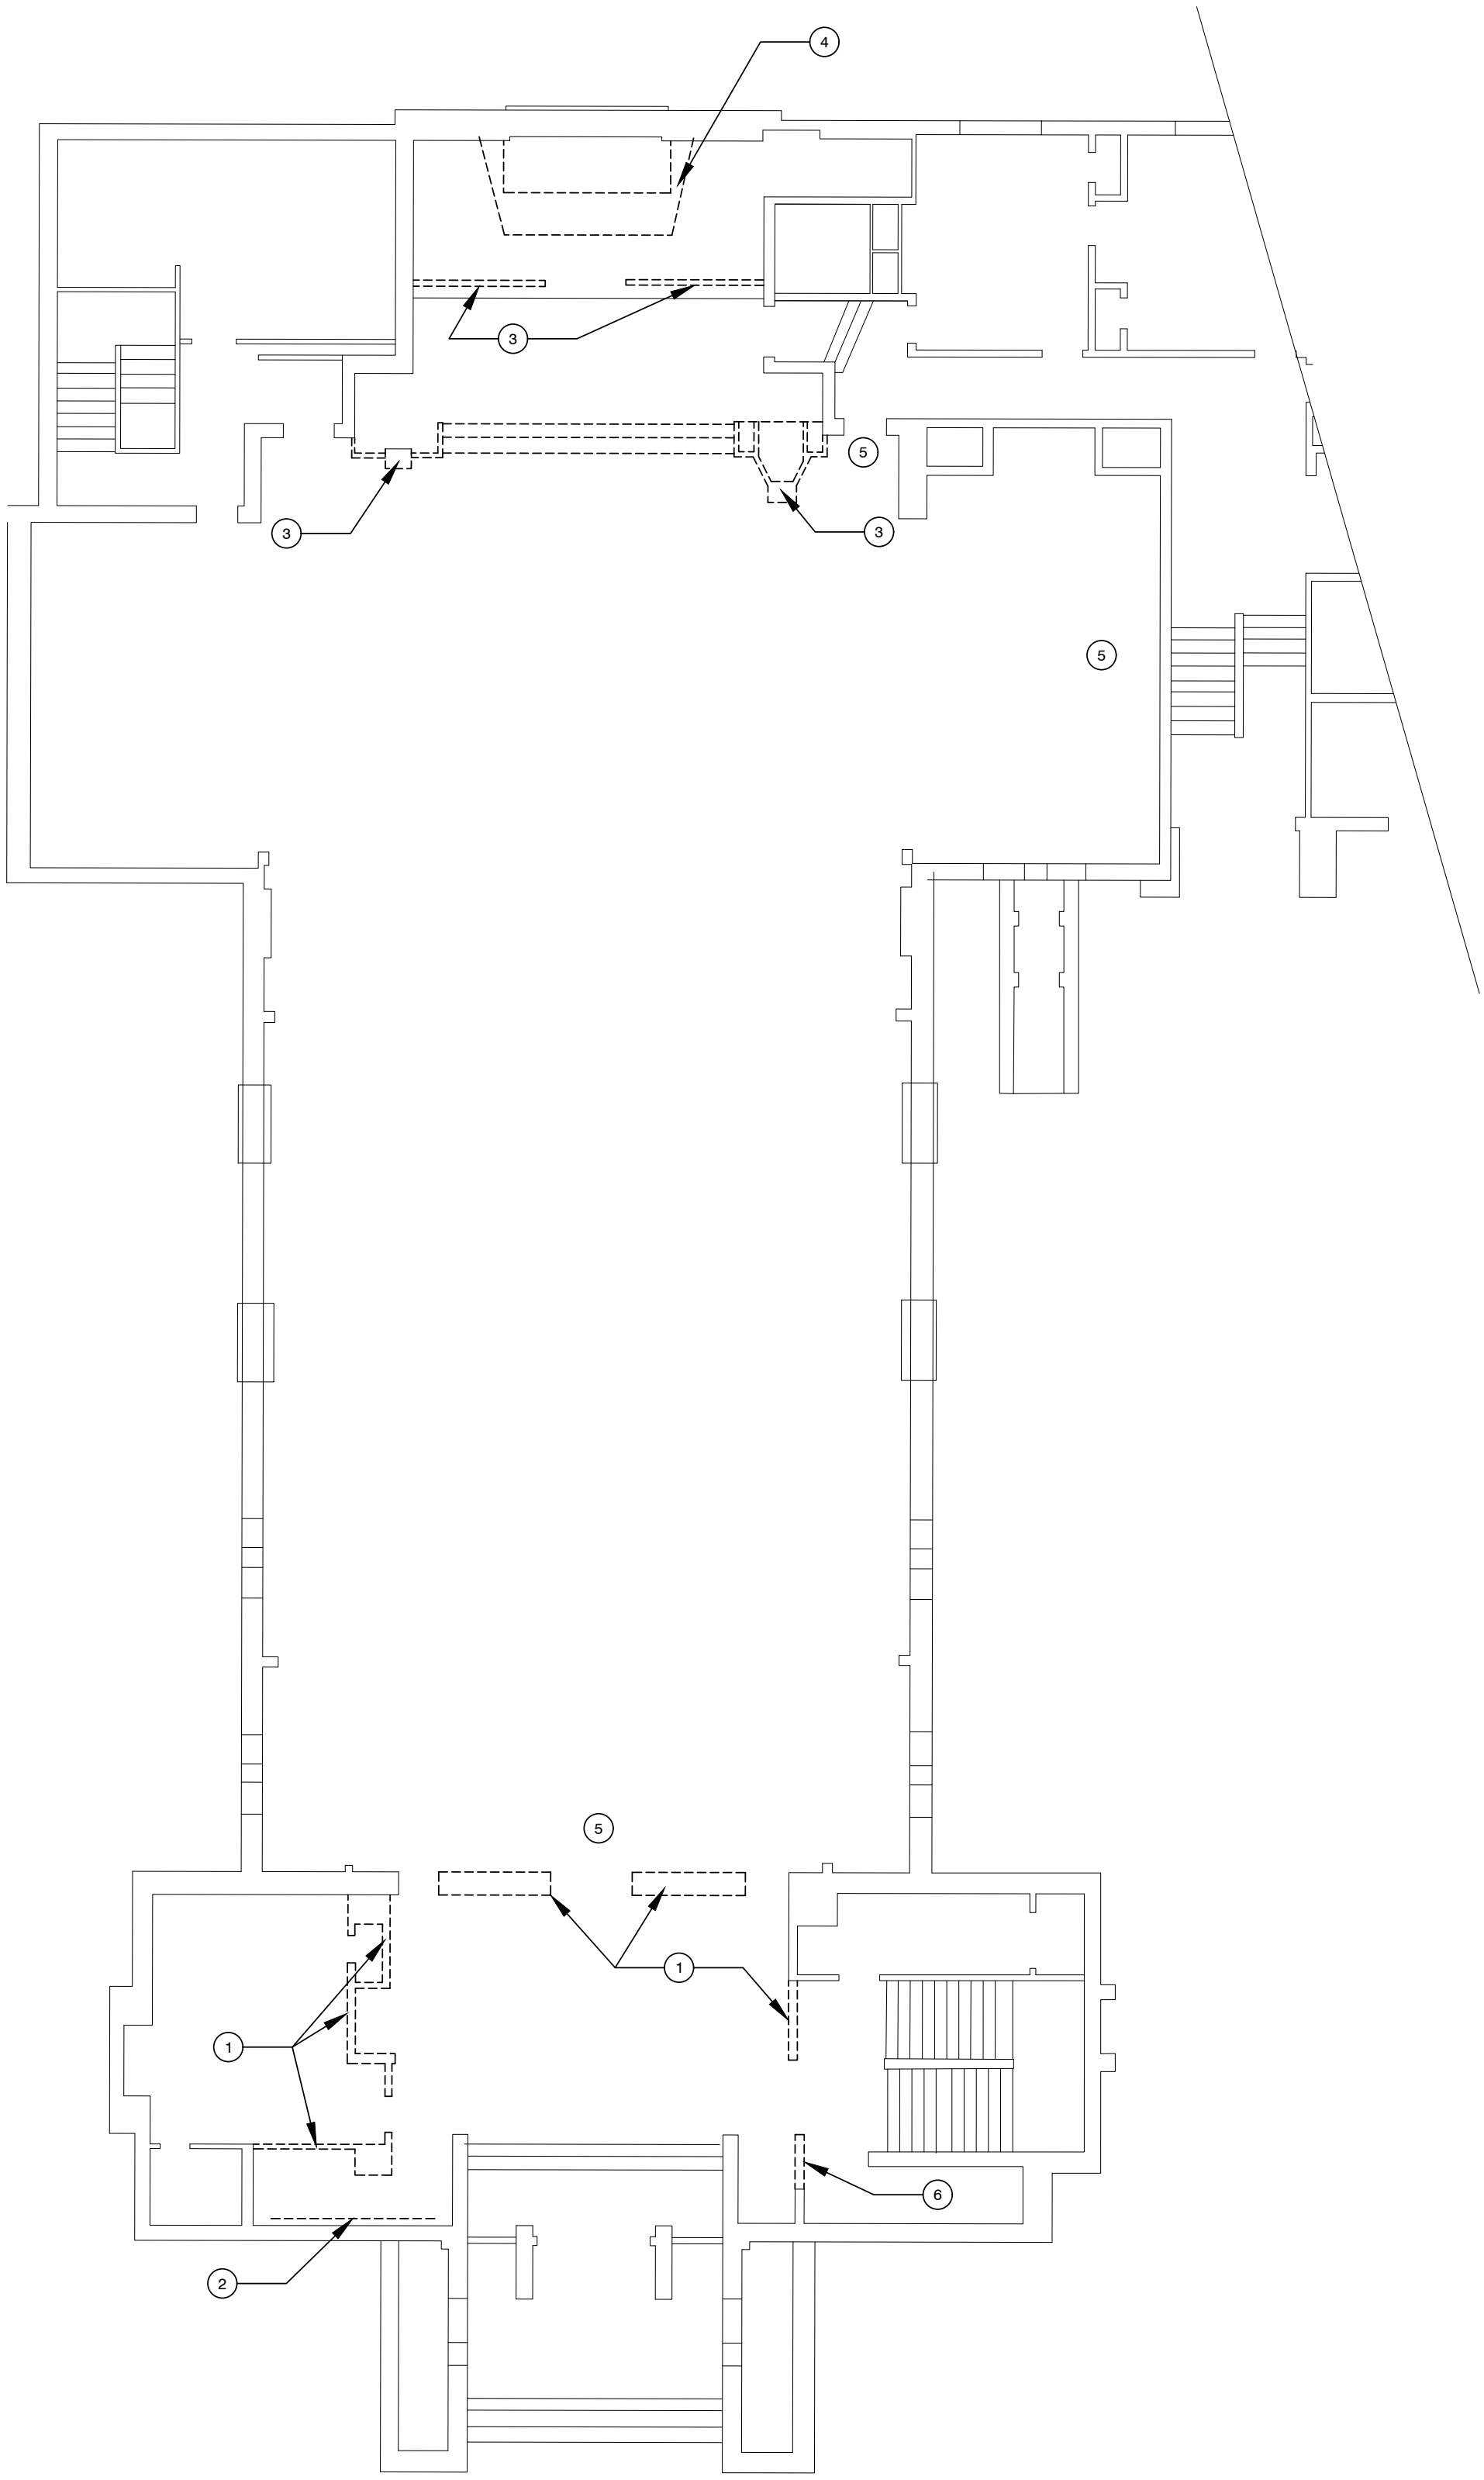

DEMOLITION PLAN

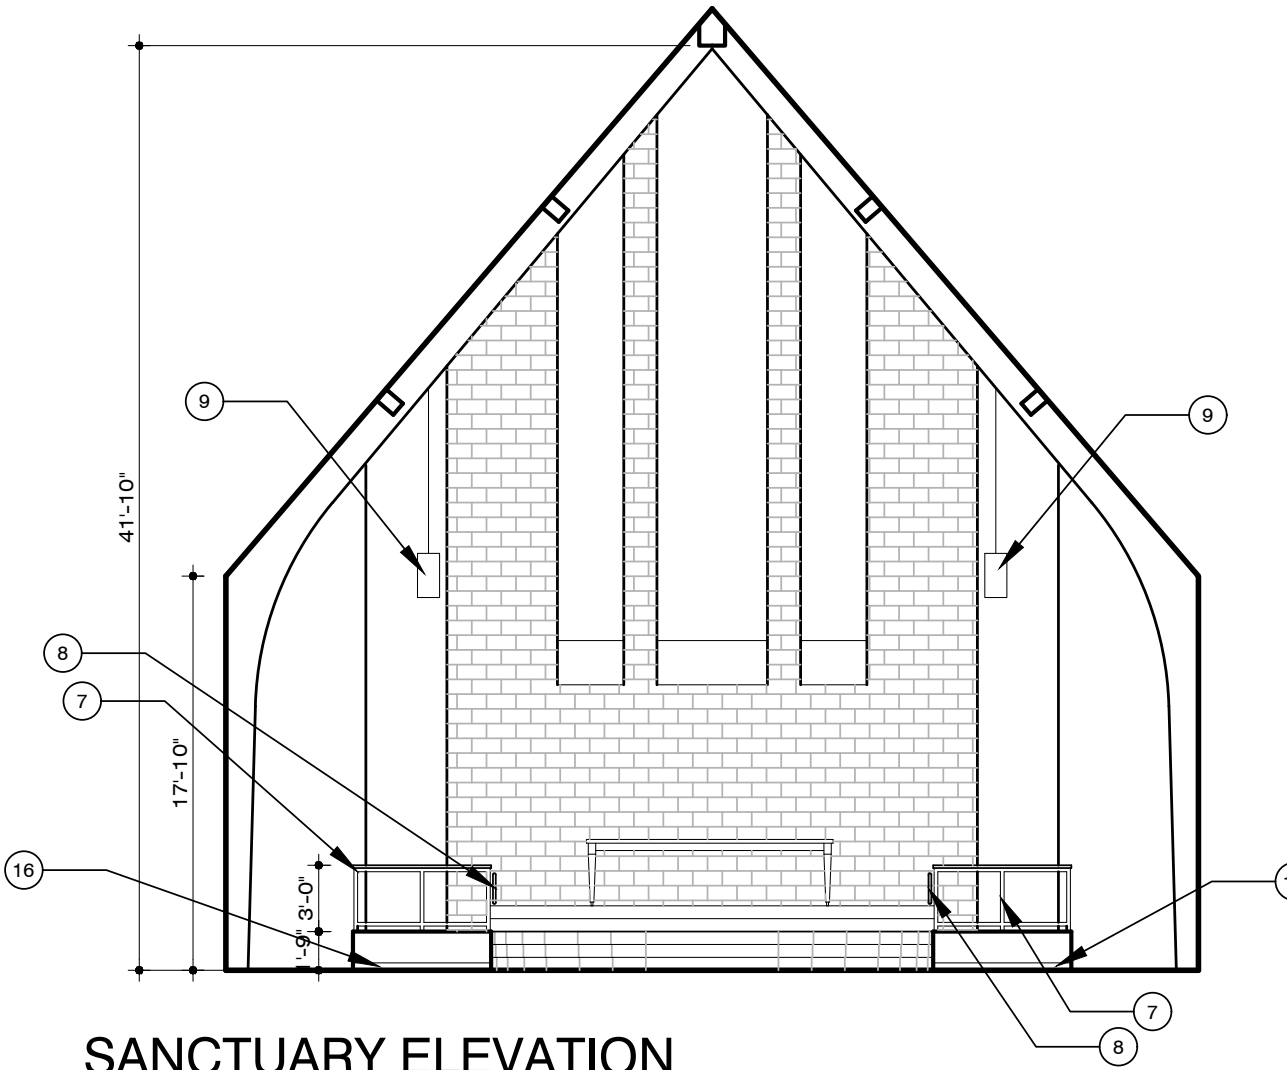

SANCTUARY ELEVATION

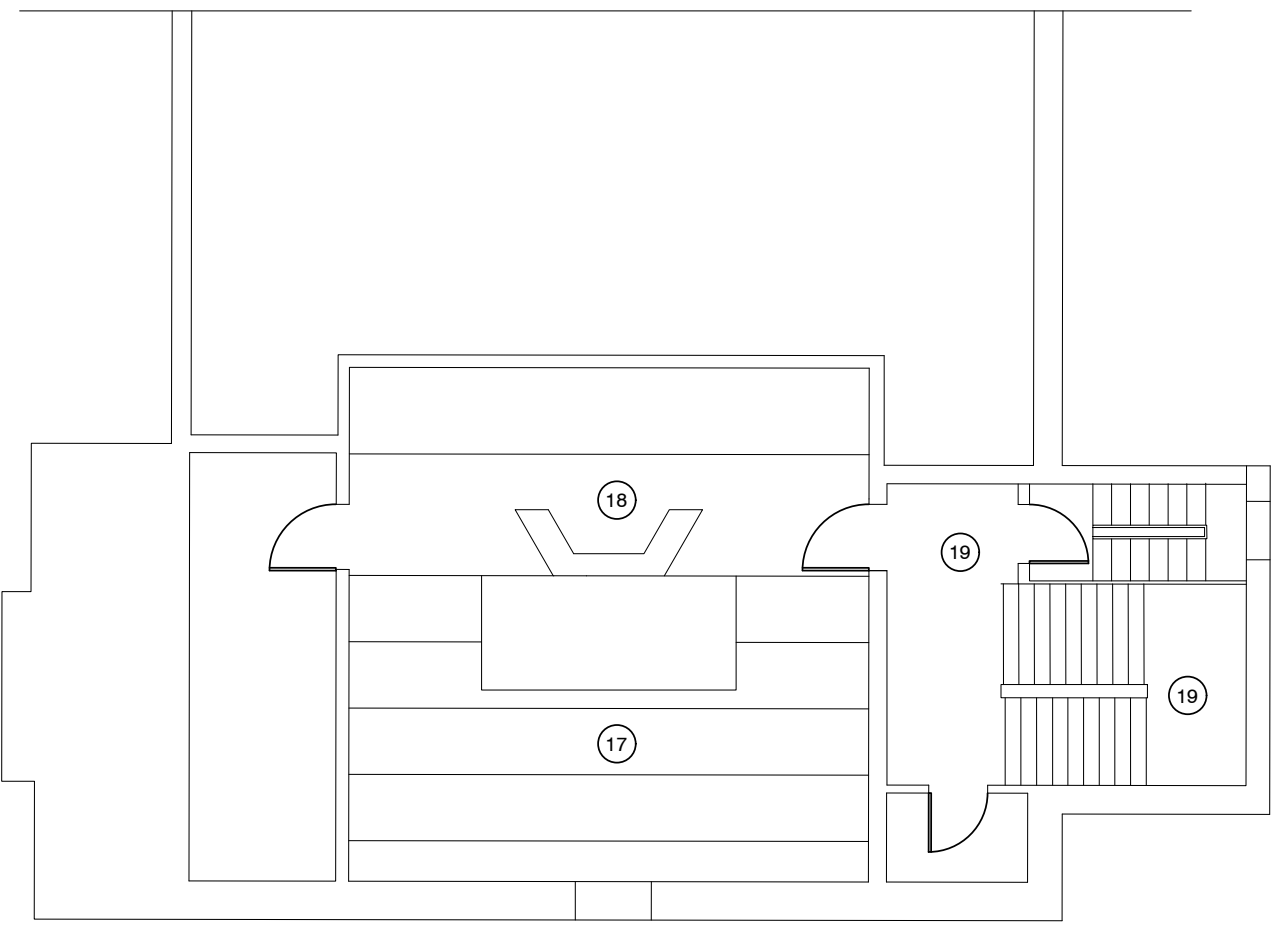

BALCONY PLAN

GENERAL NOTES

- REMOVE EXISTING MAIN LEVEL PEWS.
- DEMO EXISTING FLOORING AT ALL MAIN LEVEL WORK AREAS.
- SAVE EXISTING PLUMBING FIXTURES/ACCESSORIES IN CURRENT NARTHEX RESTROOM.
- SELECT REMOVAL OF ALL INTERIOR DOORS IN WORK AREA.
- REPLACE BALCONY LIGHTING AND FLOORING WITH NEW LED FIXTURES AND FLOORING TO MATCH REST OF WORK AREA.

KEYED NOTES

- 1 DEMO EXISTING WALL AND ASSOCIATED ITEMS. REMOVE ANY WIRE NOT TO BE REUSED BACK TO THE PANEL. ENSURE THERE ARE NO STRUCTURAL ELEMENTS TO BE REMOVED. IF ANY ARE FOUND, STOP AND NOTIFY THE ARCHITECT IMMEDIATELY.
- 2 REMOVE EXISTING COLUMBARIUM FROM WALL AND PREP TO BE MOVED TO THE NEW LOCATION. (COLUMBARIUM WORK BY OTHERS)
- 3 REMOVE EXISTING RAILING AT PLATFORM AND EXISTING STEPS.
- 4 REMOVE PLATFORM RISERS AT THIS LOCATION BACK TO WALL. PREP FOR NEW PLATFORM LAYOUT.
- 5 REMOVE EXISTING STAINED GLASS AS DIRECTED. ENSURE THAT REMOVAL DOES NOT DAMAGE GLASS OR FRAMES. STORE SAFELY IN OWNERS CARE UNTIL READY TO BE INSTALLED IN NEW LOCATIONS.
- 6 SELECT DEMO OF EXISTING WALL BACK TO NEW LOCATION. PATCH AND REPAIR WALL FROM DEMOTION. REFER TO PLAN FOR WALL TO REMAIN.
- 7 POWDER COATED TUBE STEEL RAIL WITH STAINED WOOD CAP. TOP OF RAIL TO BE MOUNTED 36" ABOVE FINISH FLOOR.
- 8 NEW 1 1/2" ROUND POWDER COATED METAL HANDRAIL. TOP OF RAIL TO EXTEND 12" HORIZONTALLY PAST TOP RISER. BOTTOM OF RAIL TO EXTEND ONE TREAD DEPTH PAST BOTTOM RISER. MOUNT RAIL ON TUBE STEEL RAIL AND 1 1/2" FROM FACE OF TUBE STEEL. ALL WELDS TO BE GROUND SMOOTH.
- 9 RAISE EXISTING PENDANT FIXTURES.
- 10 NOT IN USE
- 11 NOT IN USE
- 12 NOT IN USE
- 13 NOT IN USE
- 14 NOT IN USE
- 15 NOT IN USE
- 16 NEW 6" WOOD BASEBOARD
- 17 ALL EXISTING LIGHTING IN BALCONY AREA TO BE REPLACED WITH LED LIGHTING.
- 18 PREP AND PAINT ALL WALLS AND DOORS IN THE BALCONY AREA.
- 19 REPLACE FLOORING IN STAIRWELL AND LANDING AREAS.


NOT FOR PERMIT OR CONSTRUCTION. FOR REVIEW ONLY

EMANUEL LUTHERAN CHURCH

206 N TRAVIS ST.
SEGUIN, TX 78155

POWERS | GOOLSBY
ARCHITECTS

1824 UNIVERSAL CITY BLVD., UNIVERSAL CITY, TEXAS 78155
POWER@GOLSBYARCH.COM

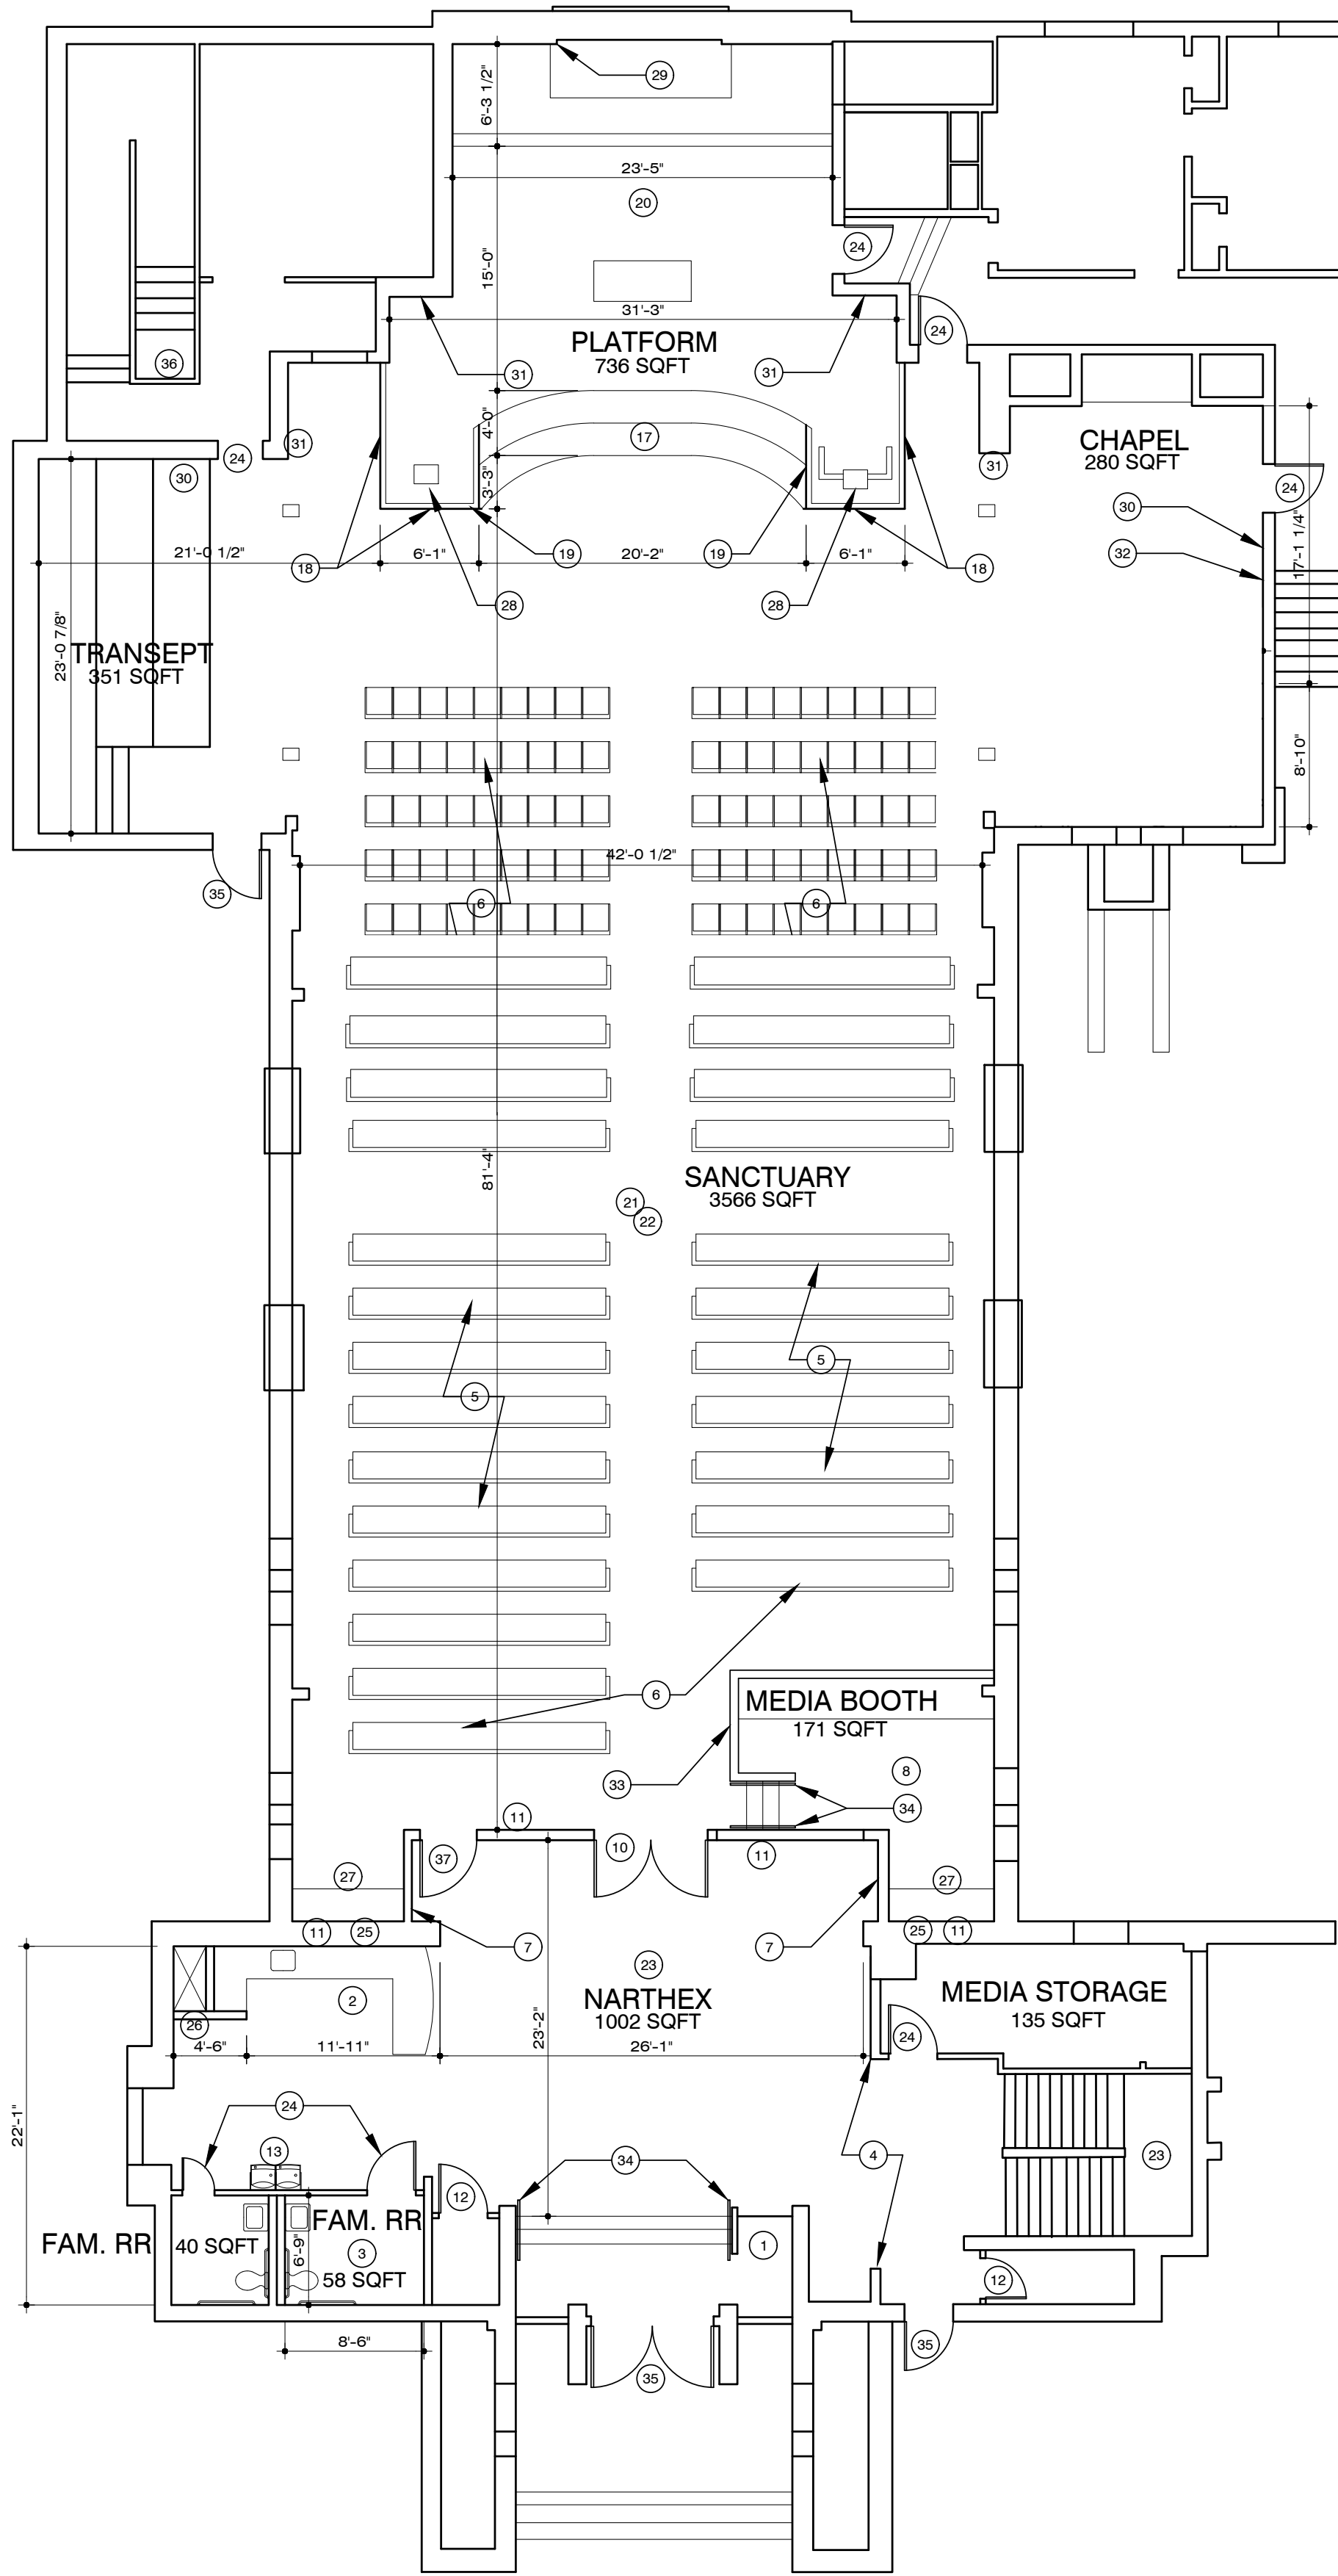

FLOOR PLAN

NO WORK

NO WORK

GENERAL NOTES

- WALL REPAIRS AS NECESSARY AND PAINTING OF DRYWALL/PLASTER WALLS, CEILINGS AND TRIM THROUGHOUT WORK AREAS (NO TONGUE AND GROOVE CEILING OR GLULAM BEAM PAINT OR REFINISHING).
- REPLACE EXISTING EXIT/EMERGENCY BACKUP LIGHTS THROUGHOUT WORK AREAS AND ALL SWITCHES/OUTLETS/COVER PLATES THROUGHOUT FIRST LEVEL WITH NEW.
- NEW 6" BASEBOARD WHERE POSSIBLE THROUGHOUT MAIN LEVEL SANCTUARY, TRANSEPT, CHAPEL, AND NARTHEX FOR CONTINUITY.
- REPLACE/REFINISH EXISTING HVAC REGISTERS THROUGHOUT WORK SPACE. RELOCATE UNIT IN NARTHEX AS SHOWN AND FLEX DUCTING/RETURN SIZING FOR ADDITIONAL NARTHEX VOLUME - NO OTHER HVAC WORK/NEW UNITS ETC. CURRENTLY IN SCOPE.
- ALL NEW PLUMBING FIXTURES/ACCESSORIES AND TILE FLOORS IN BOTH NARTHEX RESTROOMS.
- ASSUME NEW DOOR HANDLES/LEVELS/LOCKS AT ALL REMAINING/NEW DOORS IN WORK AREA.
- AVL UPGRADES PROVIDED BY SASL INCLUDE (4) NEW SCREENS, NEW MICROPHONES, PA/SPEAKERS, HOUSE LIGHTING CONTROL, THEATRICAL LIGHTING AND MEDIA BOOTH INFRASTRUCTURE UPGRADES - POWER REQUESTS AND INFRASTRUCTURE LOCATIONS TO BE PLOTTED BY SASL.
- ANY FURTHER NECESSARY ARCHITECTURAL, ELECTRICAL, PLUMBING, MECHANICAL, AND/OR STRUCTURAL DETAILS WILL BE PROVIDED DURING FURTHER DESIGN.
- DEVELOPMENT/ENGAGEMENT, ALONG WITH LIFE SAFETY AND CODE CONFIRMATION DETAILS.
- ANY UNFORSEEN CONDITIONS WILL BE DISCOVERED/VERIFIED IN THE FIELD DURING DEMOLITION AND DISCOVERY BY CONTRACTOR.
- STAGE FRAMING TO BE METAL STUD WITH 2 LAYERS OF 3/4" FIRE TREATED PLYWOOD, GLUED AND SCORED TO FRAMING BELOW. STAGGER JOINTS.
- NEW WALLS ARE TO BE METAL STUD FRAME, 16" ON CENTER WITH 5/8" GYPSUM WALL BOARD. WHEN ADJACENT TO AN EXISTING WALL, MATCH FACE OF FINISH WITH NEW WALL.
- NEW FLOORING, LIGHTING, AND WALL REPAIR/PAINT IN NARTHEX STAIRWELL TO BALCONY AND BASEMENT.
- NEW LED LIGHTING TO REPLACE EXISTING AND REPAIR/PAINT WALLS AND DOORS IN THE BALCONY AREA.

KEYED NOTES

- OPTIONAL DEMO OF EXISTING STEPS AND INSTALLATION OF NEW WHEEL CHAIR LIFT.
- NEW SOLID SURFACE COUNTERTOP WITH PAINT-GRADE CABINETS BELOW. NEW SINGLE STAINLESS STEEL SINK WITH GOOSE NECK FAUCET.
- NEW ADA COMPLIANT RESTROOM.
- SELECT DEMO OF EXISTING WALLS TO OPEN UP NARTHEX. PATCH AND REPAIR WALLS AS NEEDED. MATCH TEXTURE OF SURROUNDING WALLS. REMOVE AND RELOCATED EXISTING WATER FOUNTAINS.
- REFURBISH EXISTING PEWS. PEWS TO BE SPACED 40" BACK TO BACK.
- NEW INTERLOCKING STACKABLE CHAIRS. CHAIRS TO BE SPACED 40" BACK TO BACK.
- NEW METAL STUD WALL. EDGE OF WALL TO ALIGN WITH BALCONY ABOVE. FINISH TO MATCH EXISTING OR BE 3/8" TEXTURED AND PAINTED GYPSUM WALL BOARD.
- NEW ELEVATED SOUND BOOTH. 21" ABOVE SANCTUARY FLOOR. PONY WALL AROUND SOUND BOOTH TO BE 42" ABOVE SOUND BOOTH FLOOR. 30" SOLID SURFACE COUNTERTOP WITH HEAVY DUTY MOUNTING BRACKETS.
- NEW 3'-0" SOLID CORE WOOD DOOR TO INCORPORATE EXISTING STAINED GLASS.
- NEW PAIR OF 42" DOORS. DOORS TO INCORPORATE EXISTING STAINED GLASS.
- POTENTIAL RELOCATION FOR STAINED-GLASS WINDOWS.
- NEW WALL AND DOOR TO DEDICATED STORAGE.
- RELOCATED WATER FOUNTAINS.
- NOT IN USE
- NOT IN USE
- NOT IN USE
- NEW 2'-0" WIDE STEPS TO PLATFORM.
- POWDER COATED TUBE STEEL RAIL WITH STAINED WOOD CAP. TOP OF RAIL TO BE MOUNTED 36" ABOVE FINISH FLOOR.
- NEW 1 1/2" ROUND POWDER COATED METAL HANDRAIL. TOP OF RAIL TO EXTEND 12" HORIZONTALLY PAST TOP RISER. BOTTOM OF RAIL TO EXTEND ONE TREAD DEPTH PAST BOTTOM RISER. MOUNT RAIL ON TUBE STEEL RAIL AND 1 1/2" FROM FACE OF TUBE STEEL. ALL WELDS TO BE GROUND SMOOTH.
- NEW CARPETED FLOORING ON PLATFORM.
- NEW FLOORING THROUGHOUT SANCTUARY, CHAPEL, AND TRANSEPT AREAS.
- NEW LED LIGHTING THROUGHOUT SANCTUARY AND NARTHEX/STAIRWELL/BALCONY AREAS.
- NEW FLOORING THROUGHOUT NARTHEX, STAIRWELLS, AND LANDINGS TO BALCONY AND BASEMENT.
- NEW SOLID CORE WOOD DOOR WITH FRAME.
- DEMO AND REPLACE EXISTING ACOUSTICAL TREATMENT.
- RELOCATE EXISTING WELCOME AREA AND INTERIOR HVAC UNIT TO CORNER.
- NEW PAINT-GRADE CABINETS WITH SOLID SURFACE COUNTERTOP AT REAR SOUND BOOTH AND OPPOSITE SANCTUARY REAR CORNER.
- NEW PULPIT AND LECTERN.
- LIME WASH/TRANSLUCENT PAINT REAR BRICK WALLS.
- REMOVE FRAMED STAINED GLASS AND STATUE FROM WALLS FOR STORAGE/REPURPOSING.
- OPTION TO REMOVE PANELING AT PLATFORM AND SURROUNDING WALLS AND REFINISH SURFACE UNDERNEATH/PAINT OR COVER PANELING WITH WALL TREATMENTS/TRIM, SKIM, AND PAINT.
- NEW PAINT-GRADE WAINSCOTING THROUGHOUT CHAPEL AREA AT SAME HEIGHT AS EXISTING IN SANCTUARY.
- BASEBOARD AND WALL CAP TRIM AT NEW PLATFORM AND MEDIA BOOTH WALLS.
- NEW HANDRAIL.
- REFINISH OR PAINT EXISTING EXTERIOR DOORS.
- OPTION FOR ADDITIONAL LIFT. LOCATION FEASIBILITY TBD
- NEW 42" SOLID WOOD DOOR WITH REPURPOSED STAINED GLASS.


NOT FOR PERMIT OR CONSTRUCTION. FOR REVIEW ONLY

EMANUEL LUTHERAN CHURCH

206 N TRAVIS ST.
SEGUIN, TX 78155

POWERS | GOOLSBY
ARCHITECTS

1824 UNIVERSAL CITY BLVD., UNIVERSAL CITY, TEXAS 78155
POWER@GOLSBYARCH.COM

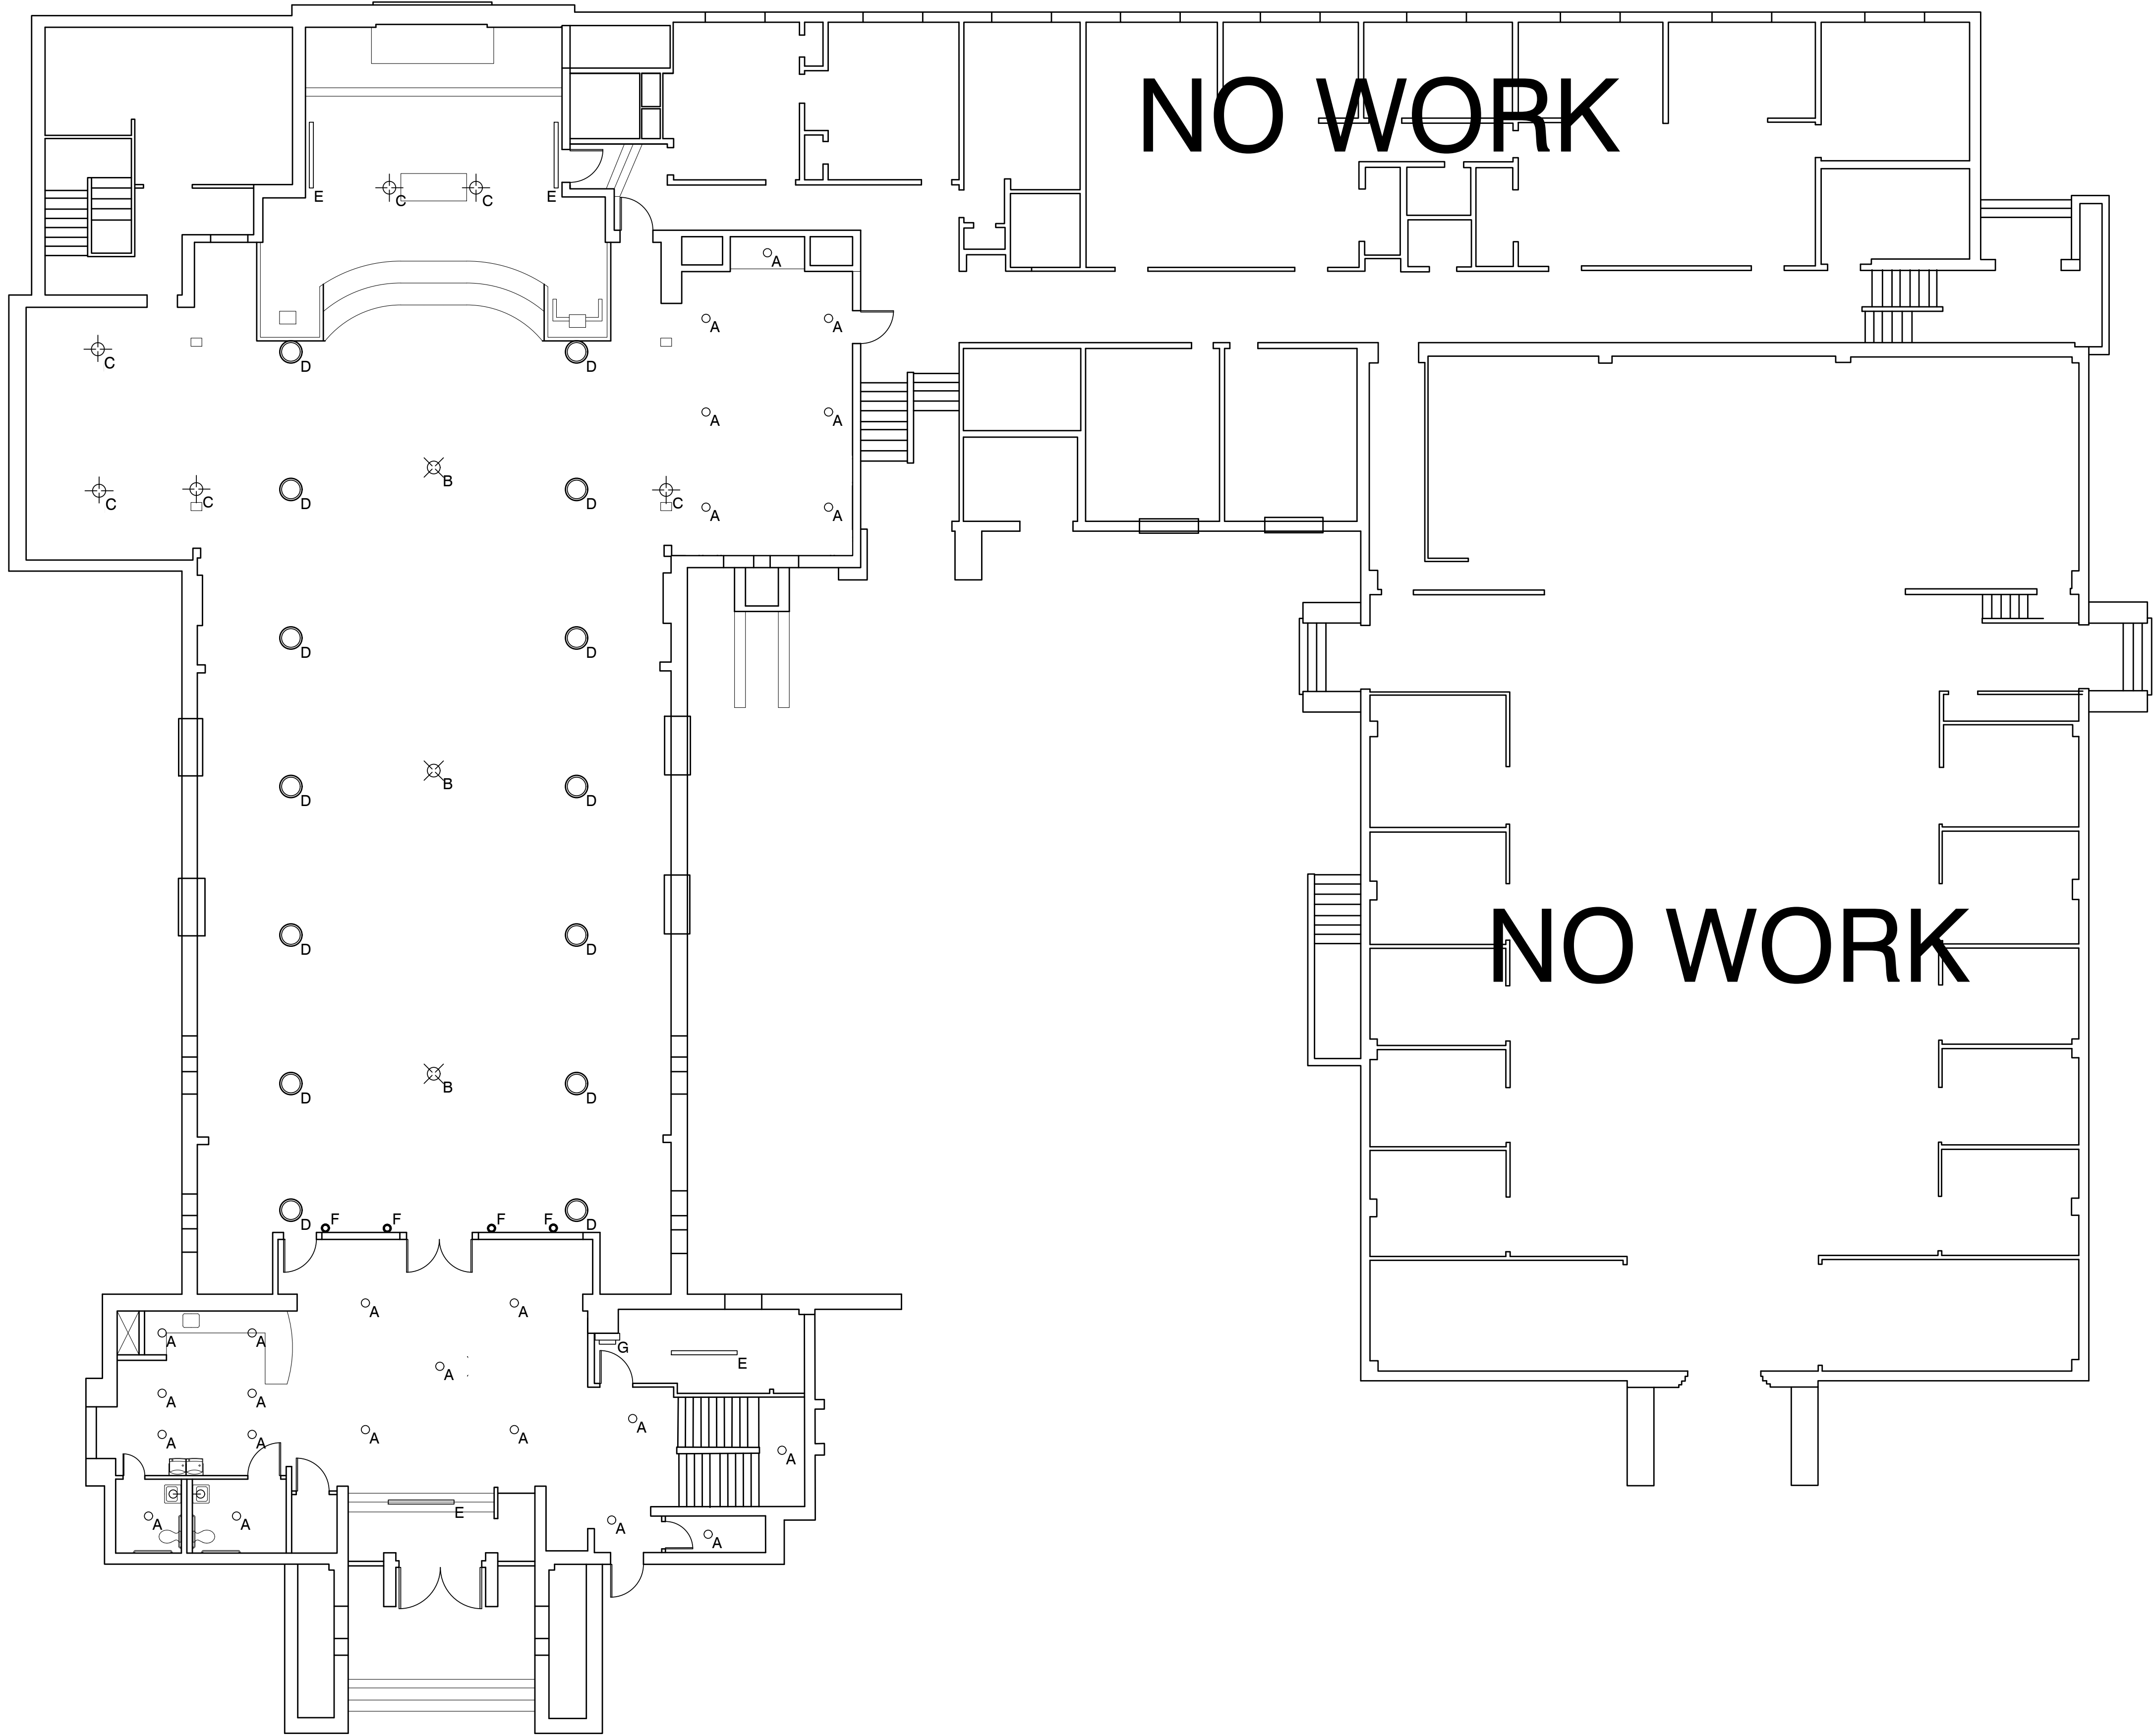

REFLECTED CEILING PLAN

GENERAL NOTES

- ALL LOCATIONS ARE APPROXIMATE AND SHOULD BE VERIFIED IN THE FIELD.
- FIXTURES AND COMPONENTS WILL BE SPECIFIED DURING FURTHER ARCHITECTURAL AND ELECTRICAL DESIGN.
- ALL FIXTURES WILL BE REPLACED IN THEIR EXISTING LOCATIONS UNLESS OTHERWISE NOTED.

RCP LIGHTING LEGEND

A	○	LED RECESSED CEILING FIXTURE 1-FOR-1 REPLACE
B	⊗	CEILING FAN NEW FIXTURE
C	⊕	LED FLOOD LIGHTS - SASL TO APPROVE LOCATION
D	○	LED PENDANT LIGHT - RETROFIT WITH DIMMABLE
E	—	TRACK OR TUBE FIXTURE 1-FOR-1 REPLACE
F	●	RECESSED LED CAN LIGHT NEW LOCATION
G	⌂	LED WALL MOUNT FIXTURE 1-FOR-1 REPLACE
H	⌂	VANITY LIGHT

NOT FOR PERMIT OR CONSTRUCTION. FOR REVIEW ONLY

EMANUEL LUTHERAN CHURCH

206 N TRAVIS ST.
SEGUIN, TX 78155

POWERS | GOOLSBY
ARCHITECTS

1824 UNIVERSAL CITY BLVD., UNIVERSAL CITY, TEXAS 78155
POWER@GOLSBYARCH.COM 214.259.0225

Date: 6/13/2026