

City Linear Indoor

inter•lux

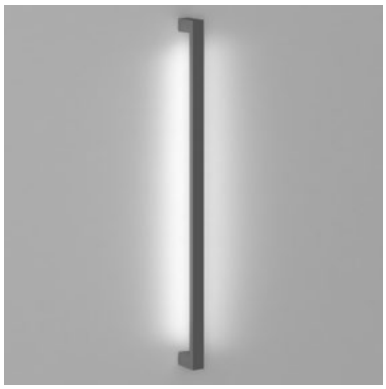


Ordering Information

WG-CL	SW			90			SA		
Model	**Fixation**	**Length**	**Power**[1]	**CRI**	**CCT**[2]	**Driver**[3]	**Lens**	**Finish**	**Options**
WG-CL	SW	24 36 48 60 XX	L M H	90	27 30 35 40	X S D010 DPH L3DAE L3D0E EL96	SA	W B S BR F	MP EM

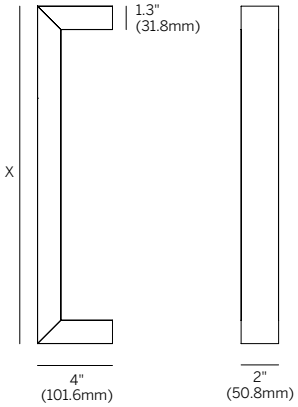

side view front view



Direct mount or optional mounting (MP) to horizontal J-box (by others)

Luminaire

- Surface wall or ceiling mounted fixture with indirect lighting for indoor use.
- Extruded aluminum housing, easily installed internal LED tray assembly. Remote driver. Field replaceable LED boards.
- Satin clear diffuser for high efficiency and soft edge beam without striations. Efficacy up to 108 lumens per watt (delivered).
- Powdercoat painted.
- 90+ CRI, 3 Step MacAdam.
- L70 (TM21 Projected 85C) Static White 60,000 hours.
- ETL and ETL-C for dry and damp locations.

Fixation

- SW = Surface wall or ceiling

Length

- 24 = 24.0" (609.6mm)
- 36 = 36.0" (914.4mm)
- 48 = 48.0" (1219.2mm)
- 60 = 60.0" (1524mm)
- XX = Specify inches to the nearest 0.25 (i.e. 72.25") (max length 96")

Power[1]

- L = 3W/ft low power (24V)
- M = 6W/ft mid power (24V)
- H = 10W/ft high power (24V)

CRI

- 90 = 90+ CRI

CCT[2]

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

Driver (remote)[3]

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming

Lens

- SA = Satin clear acrylic (standard)

Finish

- W = White, 15% gloss, RAL 9003
- B = Black, 15% gloss, RAL 9005
- S = Silver, RAL 9006 matte
- BR = Bronze, 15% gloss, RAL8080
- F = Custom finish, specify RAL code

Options

- MP = Mounting plate for horizontal J-box
- EM = Emergency LED driver (remote)

1 Wattage shown does not include power supplies/drivers.
2 See photometric data sheet for delivered lumens.
3 See power supply page for details.