


Smart Tracker Lite Remote Power Manager

018-048-10

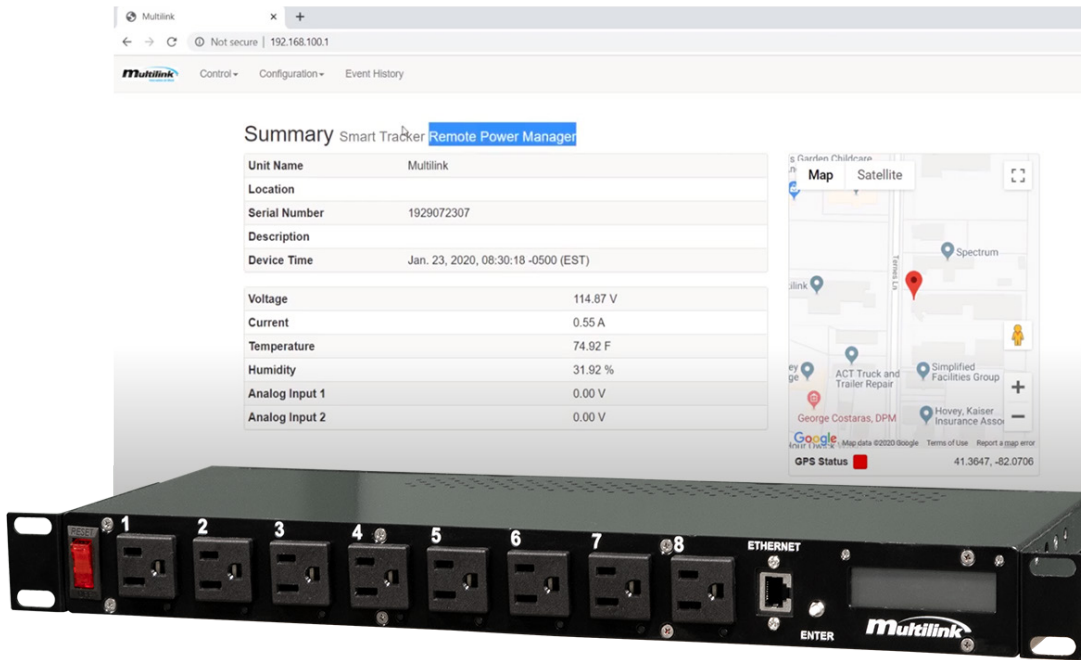

Product Description

The SmartTracker Lite is a cost-effective version of Multilink's full featured model that brings streamlined functionality to remote power management. Contained within the rack-mounted, environmentally hardened model are 8 normally closed AC outlets and 4 output relays. Each AC outlet and output relay may be controlled remotely through the embedded web page or scheduled to perform an action at a specific time. Additionally, 4 digital inputs allow the SmartTracker Lite to monitor external devices such as power supplies or other systems containing relay systems.

Each SmartTracker Lite contains an LCD and LED system to provide local status and operational information to users. A full-featured web page allows for remote control, configuration, automation, and upgrading of the SmartTracker Lite. An embedded SNMP agent is also included to provide operational information to network management systems.

Specifications

General Specifications

Parameter	Specification
No. Outlets:	8 Individually Controlled Outlets
Outlet Type:	NEMA 5-15R, 15A/125 VAC, 60Hz
User Input:	Pushbutton for Specific Actions
LEDs:	Indicators for Active Outlets, Relays, and Digital Inputs
LCD:	Dual Line 2x20 Backlit
Embedded Webpage:	Password Protected User Interface
Event Log:	Stores Thousands of Events
Automation:	Scheduled Events and Actions
Remote Updates:	Firmware and Unit Configuration
System Clock:	NTP/Manual Update

Mechanical Specifications

Parameter	Specification
Dimensions:	1.7"H x 7.0"D x 19"W (43mm x 482mm x 178mm)
Weight:	5 Lbs.(2.26 Kg)
Color:	Black
Mounting:	1RU Rack Mounting w/ Adjustable Rack Mount Brackets or Shelf Mount
Relay and Input Connections:	Screw Terminal Plugs for 12-22AWG Wire

Digital Input Specifications

Parameter	Specification
No. Digital Inputs:	4 Individual Inputs (2 Contacts per Input)
Digital Input Voltage:	5VDC, 10mA Max., Opto-isolated Inputs

Output Relay Specifications	
Parameter	Specification
No. Output Relays:	4 Individual Output Relays
Relay Switching Voltage:	250VAC, 125VDC MAX
Relay Current Capacity:	10 Amps, Each

AC Input Specifications	
Parameter	Specification
Voltage Range:	85-154VAC; 120VAC Nominal
Frequency:	60Hz $\pm$ 3Hz
Circuit Breaker Rating:	15A
Current Capacity:	15A
Power Cord:	Pluggable 5-15P, C13 15A/125VAC

Environmental Specifications	
Parameter	Specification
Operating Temperature:	-37°C to +74°C (-34°F to 165°F)
Operating Humidity:	5-95% Non-condensing
Storage Temperature:	-45°C to 85°C (-49°F to 185°F)

Communication Specifications	
Parameter	Specification
Network Interface:	10/100/1000 BASE-T Ethernet Port, RJ45 Connection, Auto MDI-x
Network Protocols:	NTCIP/TCP/IP/HTTP/SNMP/SNTP/UDP
IP Addressing:	DCHP and Static IP Addressing
Notification Type:	SNMP Traps/Email Notification

Safety Standard Specifications	
Parameter	Specification
Standards:	NEMA TS2-2016 v03.07



Multilink Inc.
580 Ternes Ln
Elyria, OH 44035
Tel: (440) 366-6966
Fax: (440) 366-6802



facebook.com/GoMultilink1



twitter.com/GoMultilink



youtube.com/GoMultilink

© Multilink Inc. 2022 • All Rights Reserved