

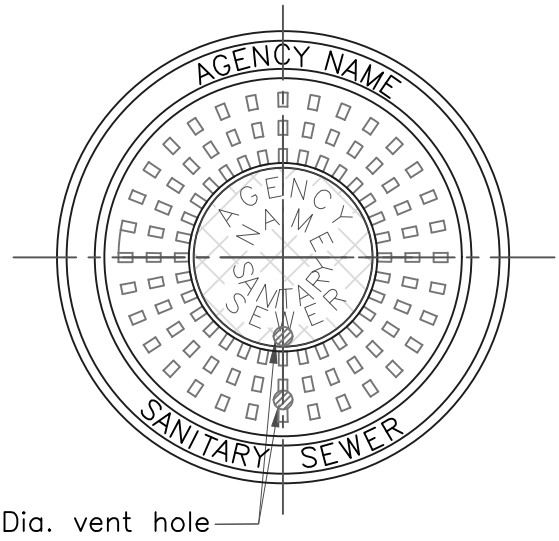


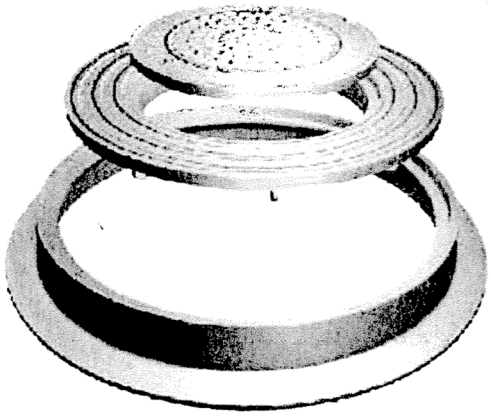

COVER

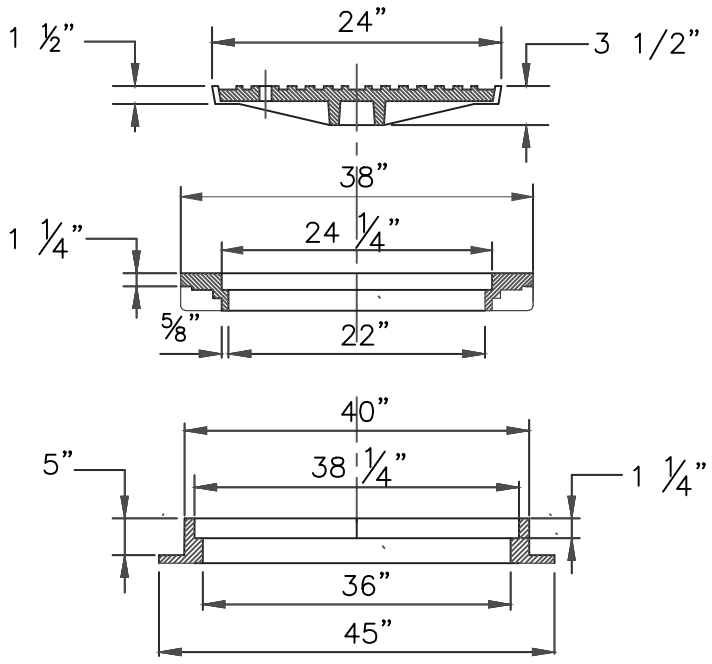

NOTES:

1. Contact Agency for approved frame/cover manufacturers and casting numbers.
2. Cast iron shall meet ASTM A–48 and have minimum tensile strength of 35000 lbs/sq. inch.
3. Mating surfaces of frame and cover shall be machined to fit without rocking with covers in any position within frame or outer cover.
4. Weight of frame and cover 800 lbs. minimum.
5. Name of Agency if public. Both inner and outer cover shall have Agency name.
6. Private manholes shall be marked "PRIVATE" where "Agency Name" is shown above.
7. Outer 36–inch and inner 24–inch cover shall be bolted where required by Agency.

STANDARD CONCENTRIC DUAL MANHOLE COVER AND FRAME

ISSUED:	NUMBER: SD-2