

George Latimer
County Executive
Department of Public Works & Transportation

Hugh Greechan, P.E.
Commissioner

September 28, 2021

Airport Bulletin # 21 - 33

Rehabilitation of Taxiway Lima between Runway 11/29 and Taxiway Charlie Project

On Tuesday, October 5, 2021 the airport will commence the Rehabilitation of Taxiway Lima between Runway 11/29 and Taxiway Charlie Project. Project will be conducted in three distinct phases with expected completion by January 2022. Throughout this time period, construction crews and heavy equipment will be operating Monday thru Friday, between the hours of 6:00 am to 4:00 pm and inside of the flagged and lighted orange and white low profile barricades that physically outline the respective construction phase areas. Project includes the full depth demolition of old asphalt, lights and signage and the installation of new pavement, markings, LED taxiway lighting and signage. Details with overhead image of phasing are as follows:

Phase I - October 5, 2021 thru October 29, 2021

- Taxiway Lima between Runway 11/29 and the Taxiway Lima/Foxtrot Intersection is closed, Runway 11/29 will also be closed when heavy equipment and work crews are operating in close proximity to the runway. Note, throughout this project, Runway 16/34 will remain open and operational. During this phase, Taxiway Foxtrot west of the intersection and the Foxtrot Run-up pad will remain open and operational.

Phase II - November 1, 2021 thru November 24, 2021


- Taxiway Lima between Taxiway Charlie and north of the Taxiway Lima/Foxtrot Intersection is closed. During this phase, Taxiway Charlie, Taxiway Foxtrot and Taxiway Lima south of the construction area will remain open and operational.

Phase III - November 29, 2021 thru January 31, 2022

- Expect daytime closures in one of the Phase I or Phase II areas in order to complete the installation of LED taxiway lights, signage and shoulder work.

During this improvement project, Taxiway Charlie west of Taxiway Lima to the emergency staging area will serve as the main haul route for all construction activities and will normally remain open and fully operational. Trained personnel will be operating distinctively marked, flagged and lighted vehicles and will provide escorts for all movements of construction crews, equipment and materials on the designated Haul Route between the Equipment & Materials Staging Area (ASR-9) and construction work areas. In instances involving frequent trucking of materials related to removal or reconstruction, a Mobile Vacuum Sweeper will be operating in trail for debris removal.

We strongly recommend that all operators check the daily **Distant NOTAMS** and **VEOCI** e-mails. Your cooperation is appreciated during this construction period and if you have any questions please contact Airport Operations at (914) 995 – 4850.

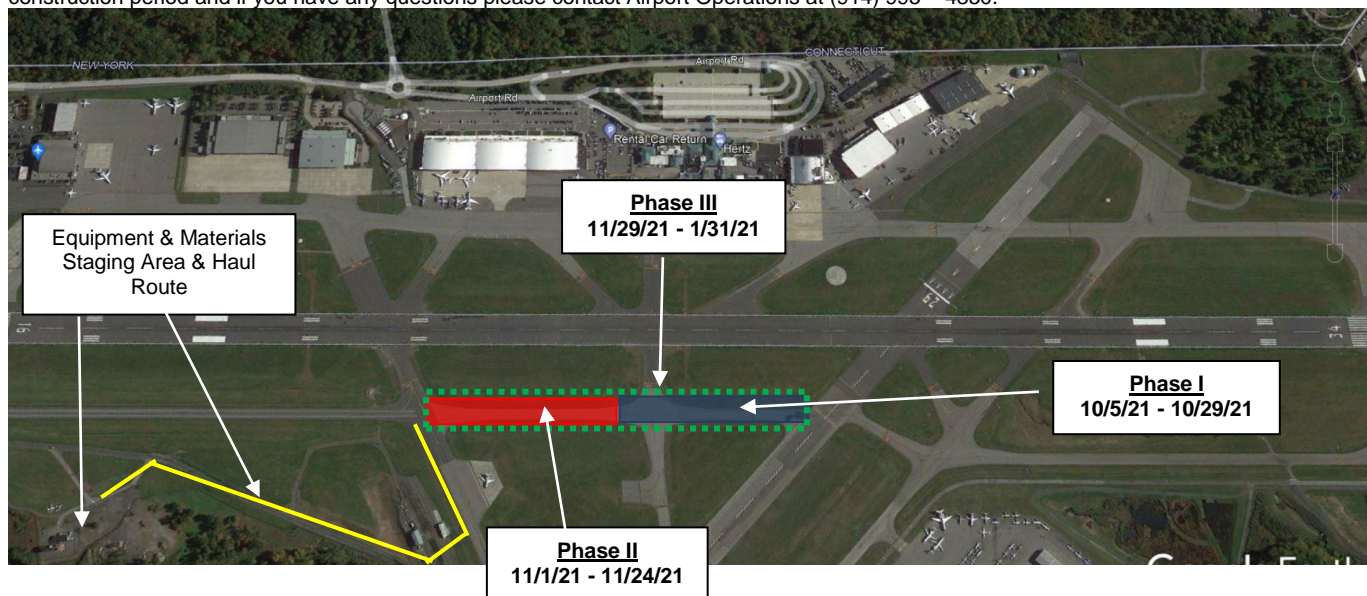

John Starace
Operations Manager

cc: Peter Scherrer, Steve Ferguson, Hugh Greechan, Nick Rienzi, Lt. Vincent Antonecchia, Jose Espreo, Brian Fleming, Demisha Vega, Jorge Marmol, Rich DiLeonardo, Richard Davidson