


High Cube Flatdecks

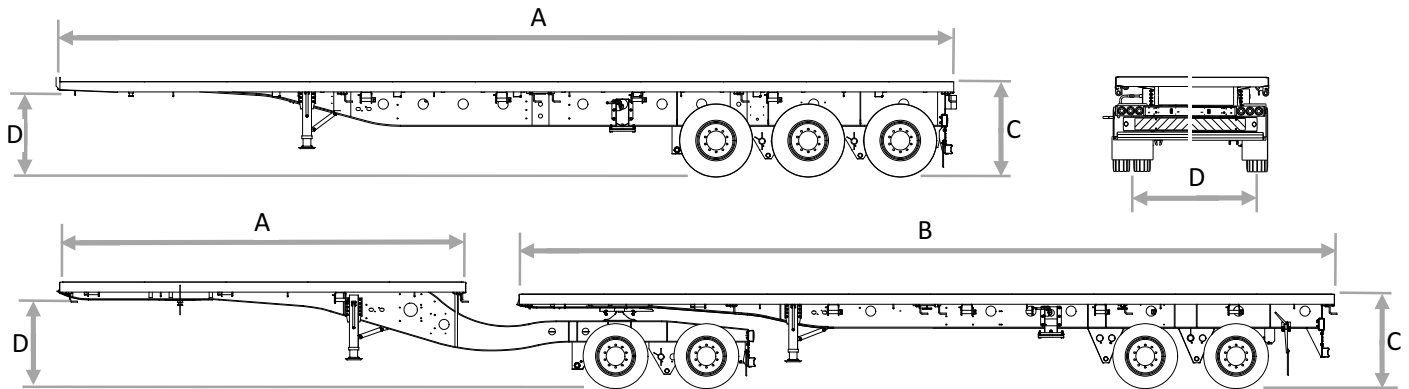

Models

AT3 High Cube Flatdeck Tridem. High strength + high tensile steels, low tare weight, high strength. 30 tonne centre mount 20ft containers.

AT4 High Cube Flatdeck Superlink. High strength steels, low tare weight, high strength. 24 tonne centre mount 20ft containers.

Standard Fitments

Landing Legs	Two speed wind up landing legs, 24 tonne capacity.
Kingpin	2" Block type welded in with re-inforced rubbing plate assembly.
Paint System	Chassis basalt grey, modular assemblies chrome yellow, super structure custom colour.
Twistlocks	Full container locks including 20ft center mount.
Electrics	Multi-volt SABS approved system, modular harness with Duetsch plugs. 3-in-1 Combination lights riveted.
Braking System	SABS multi-volt ABS braking system, twin-line fail to safe with automatic slack adjusters.
Undercarriage	7 Blade 11t mechanical suspension on a 420x180 Propar type axle. Spigot mount 10 stud steel rims.

		Ratings (Kg)				Dimensions (mm)							Other		
Model	Variant	Design	Tare	Payload	Axle	A	B	C	D	E	F	G	Deck	Wheels	Notes
AT3	-132-1	34000	6820	32768	11000	13200	X	1405	1280	1910	X	X	3mm MS	315/80R22.5 Duals	
AT3	-132-2	34000	6190	33378	9000	13200	X	1405	1280	2200	X	X	3mm MS	385/65R22.5 Singles	
AT4	-6.12-3	40000	8227	38373	11000	6074	12200	1405	1320	2200	X	X	2mm DX	275/70R22.5 Duals	*Leader=1590mm

Please Note: Payloads based on Euro type truck (9.4t tare) without optional fitments nor spare wheel.

Optional Fitments	Tare (kg)	Total
Spare wheel 315/80R22.5	116	
Spare wheel 385/65R22.5	127	
Air suspension 3 axles	-133	
Air suspension 4 axles	-150	
Air suspension axle lift	32	
Headboard 600mm solid, fixed/folding	75/95	
Corner plate carrier 1,2m or 2m long	37/41	
Stake pockets (7 pairs)	68	
Stake pockets (11 pairs)	107	
Stake poles (2m long x 14 off)	366	
Stake pole carrier	104	
Storage box 900 x 600 x 600mm	80	
Storage box 1466 x 600 x 600mm	124	
Storage box 2466 x 600 x 600mm	175	
Aluminium wheels duals Tri	-300	
Aluminium wheels singles Tri	-162	
Aluminium wheels duals Link	-400	
Aluminium wheels singles Link	-216	
Remove landing legs	-140	

Tare Total

Errors and amendments reserved. © Prime Trailers (Pty) Ltd.