



PLANT SOLUTIONS LTD.
A TRUSTED PARTNER

Honeywell

PERSONAL PROTECTIVE EQUIPMENT SOLUTIONS

OVER 20 YEARS OF INNOVATIVE PRODUCTS & SERVICES

www.plantsoltt.com

Ex-stock at Plant Solutions Limited



**HONEYWELL EYE
PROTECTION**

HONEYWELL UVEX GENESIS EYE PROTECTION



Uvex Genesis is engineered with a wrap-around 9-base uni-les style to deliver on the best all-day comfort and protection. It is built with MMT—Multi-Material Technology and features dual-action hydrophilic and hydrophobic HydroShield® Anti-Fog Coating lens. Uvex Genesis has 2X greater scratch resistance and offers lifetime guarantee. Certified to meet ANSI Z87.1-2015 (High Impact) and CSA Z94.3 2015 standards

SKU	PRODUCT NAME	FRAME COLOUR	LENS TINT	LENS COATING	APPLICATION
S3200HS	Uvex Genesis®	Black	Clear	HydroShield® AF	General Purpose
S3201HS	Uvex Genesis®	Black	Espresso	HydroShield® AF	Sunglass protection
S3202HS	Uvex Genesis®	Black	Amber	HydroShield® AF	Low light application
S6900HS	Uvex Genesis®	Replacement Lens	Clear	HydroShield® AF	
S6901HS	Uvex Genesis®	Replacement Lens	Espresso	HydroShield® AF	
S6902HS	Uvex Genesis®	Replacement Lens	Amber	HydroShield® AF	

HONEYWELL UVEX STEALTH SAFETY GOGGLES WITH CLEAR HYDROSHIELD ANTI-FOG LENS, GRAY LOW PROFILE FRAME & NEOPRENE HEADBAND (S3960HS)



The HydroShield coating features dual hydrophilic and hydrophobic properties that keep lenses clear up to 60 times longer than our next best coating. A pivoting, quick-adjust neoprene headband allows for a customized fit and longwearing comfort on the job. Lens replacement is easy and economical. Safe and durable, these goggles meet ANSI Z87.1-2003 and CSA Z94.3 standards.

Recommended Industries/Use:

- Chemical Construction
- Law Enforcement
- Manufacturing
- Mining
- Municipal Services
- Oil and Gas
- Pharmaceutical
- Steel and Metals Transportation
- Utilities

Hazards:

- Abrasion
- Airborne Particulates
- Biohazard
- Chemical
- Impact
- Low Visibility
- Splash

SKU	PRODUCT NAME	FRAME COLOUR	LENS TINT	HEADBAND	APPLICATION
S3960HS	Uvex Stealth	Gray	Clear	Neoprene	Chemical splashes & impacts
S700HS	Uvex Stealth	Replacement Lens	Clear		

HONEYWELL UVEX TIRADE™ SEALED EYEWEAR



S4041

Performance Features

- Indirect ventilation channels on the foam and subframe provide superior dust filtration keeping debris out of the eyes
- Frameless, unilens design allows for wide-field peripheral vision
- Quick-release hinge system converts easily from temples to headband
- Removable temples and standard adjustable headband included. Hypoallergenic latex-free option available
- 100% Non-conductive dielectric design. Can be worn in environments where accidental exposure to electrical charge is possible
- Uvextra® anti-fog coated lens reduces fogging, keeping lenses clear



S4040

RECOMMENDED INDUSTRIES/USE:

- Agriculture
- Construction
- Food Services
- Forestry
- Manufacturing
- Mining
- Oil and Gas
- Steel and Metals
- Utilities
- Wind Energy

REGULATIONS:

- ANSI - Meets the ANSI Z87.1-2010 standard
- CSA - Tested by Honeywell to meet the requirements of the CSA Z94.3 standard
- Not for chemical splash applications

HAZARDS:

- Airborne Particulates
- Impact

SKU	PRODUCT NAME	TEMPLE COLOUR	LENS TINT	LENS COATING
S4040	Uvex Tirade®	Gloss Black	Clear	Uvextra AF Uvextra AF
S4041	Uvex Tirade®	Gloss Black	Grey	

HONEYWELL UVEX A700 SERIES SAFETY EYEWEAR



A705

A706

PERFORMANCE FEATURES

- Sport-inspired shaping provides a stylish fit for the everyday worker
- Lightweight, flexible temples with padded tips provide a secure, wraparound fit and all-day comfort
- Molded universal nose bridge provides a comfortable fit
- 9-base polycarbonate hard coated lens provides a 180° field of distortion free vision
- Slim size models are a full 10% smaller; designed to fit smaller or narrower facial profiles
- Provides 99.9% UV protection
- Meets ANSI Z87.1-2010 and is certified to the requirements of the CSA Z94.3 standard.

SKU	PRODUCT NAME	FRAME COLOUR	LENS COLOUR	LENS COATING
A705	Uvex A700 Series	Clear	Clear	Uvextra Anti-Fog
A706	Uvex A700 Series	Gray	TSR Gray	Uvextra Anti-Fog

HONEYWELL UVEX XV100 SERIES SAFETY EYEWEAR



XV100

XV101

FEATURES & BENEFITS

- 10-base, wrap-around uni-lens for great peripheral vision and protection
- Molded, universal nosepiece for easy fit
- Lightweight design and thin, shaped temples for all-day comfort
- Anti-scratch Hardcoat lenses for maximum durability
- Meets ANSI Z87.1-2010

PRODUCT USE:

- General use and protection against impact (45m/s)
- Well suited for applications such as utilities, light & heavy manufacturing, bio tech, ship building, construction and automotive manufacturing

SKU	PRODUCT NAME	FRAME COLOUR	LENS COLOUR	LENS COATING
XV100	Uvex A700 Series	Clear Frosted	Clear	Hardcoat
XV101	Uvex A700 Series	Gray Frosted	Gray	Hardcoat

Honeywell Uvex Clear® Plus Towelettes



S470

- Swiftly lifts and removes dirt: dust: debris: oil
- Reduces visible soil to below detectable limits (.2 to .3% haze)
- Streak-free: residue-free: haze-free results
- Alcohol and silicone-free
- Methanol: ethanol: and isopropanol-free
- Butoxyethanol-free
- Pleasant smell from all-natural papaya extract
- Safe to use on any lens or coated surface
- Won't degrade or delaminate lens material
- Can be used in temps as low as -40°C (-40°F)
- Proprietary formula
- 5 year shelf life



HONEYWELL EAR PROTECTION



HONEYWELL VERISHIELD 100 SERIES HEARING PROTECTION



1035192-VS

VERISHIELD VS100 SERIES FEATURES AND BENEFITS

- Large dimension range: Comfortably fits a wide range of head sizes. 17% more adjustable than earlier versions.
- Wide cup opening: Ideal for workers with larger ears or who wear hearing aids. Opening area of the cup increased by 16% over earlier versions.
- Lightweight cushioned headband: Steel-wire construction with padded headband and precision micro adjustments designed for just the right fit around the ear.
- Memory foam ear cushions: New unique memory foam that combines denser and softer foam than previous models: for greater comfort and attenuation. Reduces squeezing pressure on the head and enhances comfort.



1035200-VS-LA

1035202-VS-LA

NRR	VERISHIELD	MODEL #	PART#	DESCRIPTION
26	VS120D	1035192-VS	1035192-VS	Verishield dielectric, Over-the-head earmuffs
23	VS110DH	1035200-VS-LA	1035200-VS-LA	Verishield dielectric earmuff, Hard hat attachment
27	VS130DH	1035202-VS-LA	1035202-VS-LA	Verishield dielectric earmuff, Hard hat attachment

HONEYWELL HOWARD LEIGHT EARPLUGS



NRR	PART#	DESCRIPTION	USE
33	Max-1	Max, uncorded, disposable earplugs	An economical and convenient choice for work situations that demand a high degree of comfort or where hygiene presents a problem for reuse. Formable foam is also THE material of choice when highest attenuation is required.



NRR	PART#	DESCRIPTION	USE
25	SMF-30	Smart-fit, detachable cord (Personalized fit), Reusable earplugs	Ideal for environments where employees can retain and store earplugs for reuse over time, reducing waste and saving money



**HONEYWELL FALL
PROTECTION**

D-BOLT ANCHOR



PART#	DESCRIPTION	USE
416/	D-bolt Anchor for up to 102 mm (4 in) working thickness, includes a 16 mm (5/8 in) diameter bolt with lockwasher and nut	Used to join the connecting device to the anchorage

HONEYWELL MILLER TEMPORARY ANCHORAGE CONNECTOR



PART#	DESCRIPTION	USE
8183/6FTGN	1.8 m (6 ft) web Cross-Arm Strap wraps around I-beams and other structures and attaches with a 51 mm (2 in) D-ring that slips through a 76 mm (3 in)	Rated for up to a 400-lb. worker



PART#	DESCRIPTION	USE
8814-24/	Lightweight, sliding Shadow Beam Anchor – stainless steel & high-strength aluminum Fits flange sizes: 305 mm to 610 mm (12 in to 24 in) Maximum flange thickness: 63.5 mm (2 1/2 in)	Used to join the connecting device to the anchorage Honeywell Miller Shadow Beam Anchors connects horizontally to a wide range of I- and H-beam flanges. Once attached, the beam anchor (SKU 8814) slides along the beam with the worker to provide increased safety, mobility, and productivity.

HONEYWELL MILLER 6 FOOT, SINGLE TURBOLITE PERSONAL FALL LIMITER



Cost-effective, compact, and lightweight, Miller TurboLite Personal Fall Limiters make the need for shock-absorbing lanyards obsolete.

- Reduces fall clearance requirements
- Extremely compact and lightweight, comparable to a shock-absorbing lanyard
- Attaches directly to the back D-ring of a harness for increased mobility
- High-impact nylon housing and abrasion-resistant webbing
- provide a long service life Integral swivel prevents lifeline from twisting
- Rated for up to a 400 lb. (181.4 kg) worker
- Twin models available for 100% tie-off

PART#	DESCRIPTION	CERTIFICATIONS
MFL-10-Z7/6FT	1.8 m (6 ft) Model Unit Connector: Steel Locking Snap Hook Lanyard End Connector: Steel Locking Rebar Hook Weight: 1.6 kg (3.6 lb). The critical link which joins the body wear to the anchorage/anchorage connector	Meets OSHA 1926.502, 1910.66, ANSI A10.32-2012, ANSI Z359.14-2012 Class A and B, CSA Z259.2.2 Type 1 requirements

HONEYWELL MILLER 6 FOOT SINGLE TURBOLITE FLASH PERSONAL FALL LIMITER



DESCRIPTION

Miller TurboLite™ Flash Personal Fall Limiters are specifically designed to protect users who are working at height while being exposed to arc flash hazards or working in hot work applications such as welding or high heat areas. Models are available in a wide range of lengths and configurations – including single and twin versions, tie-back options, and even products specially designed for users working in bucket trucks.

FEATURES

- An all-in-one solution for Arc flash and hot work applications
- High impact housing with integral shock absorber
- Rated for up to a 420lb. (189 kg) weight capacity for all connections down to foot level.
- Great Mobility: Swivel connectors allow for excellent maneuverability in any working environment.

RELIABILITY

- The durable Kevlar®/Nomex® webbing withstands arc flash testing of 40 cal/cm² as well as weld splatter and contact with high heat surfaces.
- Enables quicker, easier installation
- Meets the most stringent safety standards: including ANSI Z359.14 and ASTM F887

MATERIALS:

Shock Absorber Cover: Kevlar®/Nomex® 1, and CarbonX®

Quick Connect Harness Connector: Anodized aluminum

Housing: High impact nylon

Hub: Aluminum

Braking Mechanism: Stainless steel

Lifeline: Kevlar®/Nomex® 1 Miller

N.B: DuPont™, Kevlar® and Nomex® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company

PART#	DESCRIPTION	USE
MFLAF-12/6FT	<p>TurboLite Flash Standard Arc Flash and Hot Work Series</p> <p>Configuration: Single</p> <p>Length: 6 ft</p> <p>Harness Connector: Quick-Connect Harness Connector</p> <p>Anchorage Connector: Aluminum Rebar Hook</p> <p>Weight: 3.7 lbs. (1.6 kg)</p>	Specifically designed to protect users who are working at height while being exposed to arc flash hazards or working in hot work applications such as welding or high heat areas.

9-FOOT TURBOLITE SPECIFICATIONS



PART#	DESCRIPTION	CERTIFICATIONS
MFL-12-Z7/9FT	<p>The critical link which joins the body wear to the anchorage/anchorage connector</p> <p>2.7 m (9 ft) Model</p> <p>Unit Connector: Aluminum Carabiner</p> <p>Lanyard End Connector: Aluminum Locking Rebar Hook</p> <p>Weight: 1.5 kg (3.4 lb)</p>	<p>Meets OSHA 1926.502, 1910.66, ANSI A10.32-2012, ANSI Z359.14-2012 Class A and B, CSA Z259.2.2 Type 1 requirements</p>
	<p>The critical link which joins the body wear to the anchorage/anchorage connector</p>	

HONEYWELL MILLER FALCON™ CABLE SELF-RETRACTING LIFELINE



FEATURES & BENEFITS

- Unique side payout design reduces wear on the entry guide bushing and cable for smooth operation with less drag
- Smooth: quiet operation – Engineered spring retraction tension designed not to pull or drag on a worker to improve productivity and reduce fatigue
- Built-in: ergonomically-designed molded handle on the 50-ft. (15 m) and 65-ft. (20 m) cable units provide support and leverage when attaching to anchorage connector
- Dual swivels (unit top and snap hook) included on all cable models to minimize lifeline from twisting during use
- New and improved load indicators identify when the unit needs to be removed from service*
- *Cable models – on snap hook: Web models – flag on webbing
- Units are repairable and require no annual factory recertification* – Lowers cost of ownership and increases productivity
- *Except in Canada where the Canadian Standards Association requires annual factory recertification
- Cable models rated to 310-lbs. (140.6 kg) capacity or 400-lbs. (181.4 kg) when using a SofStop shock absorber (928LS/18INBK)
- Web models rated for up to 400 lbs. (181.4 kg) worker

PART#	DESCRIPTION	WEIGHT
MP30G-Z7/30FT	9 m (30 ft) galvanized cable (5 mm [3/16 in]) w/tagline & carabiner	4.9 kg (10.7 lb)

MILLER TURBOLITE™ PERSONAL FALL LIMITER AND TWIN TURBO™ FALL PROTECTION SYSTEM




PART#	DESCRIPTION	CERTIFICATIONS
MFLC-4-Z7/6FT	Locking Rebar Hooks w/ 3,600 lb. Gate Strength	OSHA 1926.502, OSHA 1910.66, ANSI A10.32-2012 and ANSI Z359.14-2012 Class A & B, CSA Z259.2.2. (Hardware meets ANSI Z359.12-2009 and CSA Z259.12-11.)
MFLC-12-Z7/9FT*	Aluminum Locking Rebar hooks w/ 3,600 lb. Gate Strength	Same as above

FEATURES & BENEFITS

- Performance and Safety
- Better alternative to double-leg lanyards – Reduces fall clearance requirements for use in more applications
- PFLs swivel independently – Provides ultimate worker mobility and prevents webbing from twisting and binding in the unit
- Superior safety – Webbing Retainer Clip rotates freely to prevent unintentional opening of carabiner gate during a fall increases worker safety
- D-Pad Clip – Maintains harness adjustment while working by keeping the harness webbing and D-Pad in place
- Twin Turbo G2 Connector meets all applicable standards including OSHA, ANSI and CSA

HONEYWELL MILLER 6 FOOT TWIN-LEG TURBOLITE FLASH PERSONAL FALL LIMITER

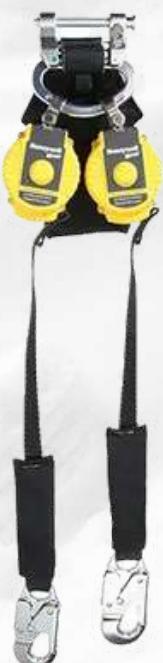

PART#	DESCRIPTION	CERTIFICATIONS
MFLAF2-12/6FT	Shock Absorber Cover: Kevlar®/Nomex®1, and CarbonX® Quick Connect Harness Connector: Anodized aluminum Housing: High impact nylon Hub: Aluminum Braking Mechanism: Stainless steel Lifeline: Kevlar®/Nomex®1 Miller	OSHA 1926.502, OSHA 1910.140, ANSI A10.32, ANSI Z359.14, ASTM F877 OSHA 1926.502- OSHA 1910.140- ANSI A10.32- ANSI Z359.14- ASTM F877

FEATURES & BENEFITS

- An all-in-one solution for Arc flash and hot work applications:
- High impact housing with integral shock absorber
- Comes in various lengths: configurations: and connector options
- Rated for up to a 420lb. (189 kg) weight capacity for all connections down to foot level.
- Meets the most stringent safety standards: including ANSI Z359.14 and ASTM F887.

HONEYWELL MILLER TITAN™ II SHOCK-ABSORBING LANYARDS



PART#	DESCRIPTION	CERTIFICATIONS
T6122SS-Z7/6FTAF	<ul style="list-style-type: none">• Locking snap hook• Large locking rebar hooks• Contracts 6-ft. (1.8 m) to 4-ft. (1.2 m)	ALL Miller brand fall protection products meet applicable OSHA, ANSI and CSA requirements.

The new economical Miller Titan™ II line of harnesses offers enhanced adjustability, improved comfort and increased worksite safety. This next generation of Titan harnesses from Honeywell Industrial Safety is an affordable fall protection solution for the general construction, manufacturing and oil & gas (refinery) markets.

HONEYWELL MILLER 6 FOOT DUAL LEG ARC RATED SHOCK ABSORBING LANYARD (KELVAR WEBBING)



PART#	DESCRIPTION	CERTIFICATIONS
8798KR-Z7/6FTBK	The 8798, double-legged, web lanyard with SofStop shock-absorber, is designed to reduce fall arrest forces. The 2 'legs' of the lanyard provide the ability for 100% tie-off	Meets all OSHA 1926.502, OSHA 1910.66, ANSI Z359.13, and CSA Z259.11 requirements.

FEATURES & BENEFITS

- An all-in-one solution for Arc flash and hot work applications:
- High impact housing with integral shock absorber
- Comes in various lengths: configurations: and connector options
- Rated for up to a 420lb. (189 kg) weight capacity for all connections down to foot level.
- Meets the most stringent safety standards: including ANSI Z359.14 and ASTM F887.

MILLER 650K CONFINED SPACE, WELDING BODY HARNESS



PART#	DESCRIPTION	CERTIFICATIONS
650KFD-7/UBL	Miller 650K Confined Space, Welding Body Harness 650K-7/UBL - Universal - Blue - 05026	CSA, OSHA

The Miller body harness is made of nomex webbing, comes in blue and meets CSA, OSHA standards. Proper sizing is important when buying this SKU. The size for this product is Universal. For proper security and safety, this body harness has back, side D-Ring securing points. For proper security and safety this body harness offers a maximum working load of 400 lb. This SKU comes with the following: Belt Loops, Sub-Pelvic Strap.

MILLER RELIEF STEP™ SAFETY DEVICE



PART#	DESCRIPTION
-------	-------------

9099X/12	Consists of a box of 12 Relief Step Safety Devices
----------	--

The Miller 9099 Relief Step is designed to relieve suspension trauma after a fall arrest. OSHA states that suspension trauma can occur within minutes after a fall, while waiting for rescue. The average fall rescue time is 15 minutes. The Relief Step provides support and helps blood circulation until rescue. Small and lightweight, the Relief Step attaches to any brand or style full-body harness.

HONEYWELL MILLER AIRCORE TOWER CLIMBING HARNESS



PART#	DESCRIPTION	CERTIFICATIONS
ACT-QCBCUG	Quick Connect Chest and Leg Straps, Front D-ring, Lumbar Pad, Side D-rings, Removable Belt	Harnesses meet OSHA 1926.502, ANSI Z359.1, ANSI A10.32 and CSA Z259.10-12 requirements.
ACT-QCUG	Quick Connect Chest and Leg Straps, Front D-ring, Lumbar Pad, Side D-rings, Removable Belt	Same As Above

MADE TO ORDER



The new Miller AirCore™ Tower Climbing harness provides the ultimate in performance, comfort and durability – exceeding expectations when used in even the most challenging climbing environments! This new line of AirCore harnesses keeps your workers comfortable and safe – increasing productivity. It's designed for workers climbing cell phone, TV, radio and utility towers, while building/decommissioning towers, changing out transmission lines/antennas, or installing/replacing lights.

HONEYWELL MILLER H500 HARNESS



PART#	DESCRIPTION	CERTIFICATIONS
H5ISP111002	The modern ergonomic design provides higher visibility, smarter features and safer, more comfortable functionality. Select from four models, available in three sizes.	Harness meets OSHA 1926.502, ANSI Z359.11, and CSA Z259.10.

MADE TO ORDER

The new Honeywell Miller® H500 integrates evidence-based "best-in-class" anatomically and ergonomically designed pressure-relief breathable paddings for more comfort and freedom of movement and introduces a variety of other new smart and intuitive features.

HONEYWELL H700 HARNESS



PART#	DESCRIPTION	CERTIFICATIONS
H7CC1A2	Fall Protection Harness: Fall Arrest, Racing Harness, Back/Chest/Side, With Belt, Aluminums.	OSHA 1926.502- ANSI Z359.11 - 2021

MADE TO ORDER

The new and exciting Honeywell Miller H700 Premium Series full body harnesses are the result of Honeywell's hyper focus on ergonomic science and safety innovation. The latest in the H-Series, the Honeywell Miller H700 boasts technologically advanced safety, comfort, and modular features.

HONEYWELL MILLER TITAN II NON-STRETCH HARNESS



FOR INDUSTRIAL WORKSITES & PLANTS

The new economical Miller Titan™ II line of harnesses from Honeywell Industrial Safety is an affordable fall protection solution for the general construction: manufacturing: oil and gas (refinery) markets.

Increased Worksite Safety

Hi-Viz color webbing and ANSI Z359.11 compliance

State 3-ring Harness

T4007/UAK

Full-body harness w/sliding back D-ring; front D-ring, side D's, mating buckle legs, chest & shoulder straps; sub-pelvic strap – universal (4 Ring Harness)

**Same features as T4007/UAK.

Please see the difference below:



FOR INDUSTRIAL WORKSITES & PLANTS

Fall protection solution for the general construction: manufacturing: oil and gas (refinery) markets.

T4007FD/UAK

State 4-ring Harness

SKU	BACK D-RING	FRONT D-RING	SIDE D-RING	CHEST STRAP BUCKLES	SHOULDER STRAP BUCKLES	LEG STRAP BUCKLES	REMOVEABLE TOOL BELT
T4007/UAK	YES	NO	YES	MATING	FRiction	MATING	NO
T4007FD/UAK	YES	YES	YES	MATING	FRiction	MATING	NO

HONEYWELL MILLER H500 HARNESS CONSTRUCTION STANDARD (CS)



The new Honeywell Miller® H500 integrates evidence-based "best-in-class" anatomically and ergonomically designed pressure-relief breathable padding for more comfort and freedom of movement

Safety harnesses for general industry: has a single D-ring on the back that connects to a self-retracting lifeline or a shock-absorbing lanyard that is attached to a secure anchor point. These full-body harnesses are used in a range of industries where workers are at risk of falling, such as construction, manufacturing, and utility work.

PART #	DESCRIPTION
H5CS311122	Miller H500 CS2 steel 2 pts harness w/tongue & chest mating buckles w/front & side D-rings w/shoulder pads size Universal

H5CS311122

H5CS311122

Miller H500 CS2 steel 2 pts harness w/tongue & chest mating buckles w/front & side D-rings w/shoulder pads size Universal



HONEYWELL HAND PROTECTION

WORKEASY CUT PROTECTIVE GLOVES



Color coded elastic cuff
Color: Follow color specification

Overedge coverstitch
color indicating size

6/XS Green
7/S Red
8/M Blue
9/L Yellow
10/XL White
11/XXL Orange

Elastic cut level color

	CUT 1
	A2 - B
	A3 - C

Basic level mechanical and cut protective gloves are constant safety requirements in a broad spectrum of industries, from warehousing to manufacturing.

GOOD QUALITY, EXCELLENT PRICE

- Optimal quality materials
- Dexterity and comfort
- Economical price
- Cut expenses

CERTIFIED PROTECTION

- Mechanical and cut resistance
- Trustworthy brand
- EN ISO 21420 and EN 388 certified
- AZO dye and REACH compliant

SIMPLY EFFICIENT

- Reduce administrative issues
- Replace glove frequently
- Continuous supply of large volumes
- Uniform design on all offering

WORKEASY MODELS

NOTE: *X/Y = Sizes (6/XS, 7/S, 8/M, 9/L, 10/XL, 11/XXL)

SKU	PRODUCT NAME & DESCRIPTION	CUT LEVEL & COLOR CODING	CHARACTERISTICS	EN388: 2016 PERFORMANCE	ABRASION RESISTANCE ASTM D3389:2010	CUT RESISTANCE ASTM F2992/F2992M-15	PUNCTURE RESISTANCE ANSI/ISEA 105:2016
WE21-3113G-X/Y	WorkEasy 13G GY PU 1	CUT 1	Lightweight polyester knit. Medium grey polyurethane coating.	3121X	2		LEVEL 2
SIZES AVAILABLE:	WE21-3113G-10/XL	 CUT1					
WE21-3113G-9/L							
WE21-3113G-8/M							
WE21-3113G-7/S							
WE23-5113G-X/Y	WorkEasy 13G GY PU A3/C	A3 C	Lightweight HPPE/ glass fiber knit. Medium grey polyurethane coating.	4X32C	3	A3	LEVEL 3
SIZES AVAILABLE:	WE23-5113G-9/L	 A3 C					
WE23-5113G-8/M							
WE23-5113G-7/S							
WEI-3313G	WorkEasy 13 GY NT 1	CUT1	Lightweight polyester knit. Dark grey microfoam nitrile coating.	3121X	2	-	LEVEL 2
SIZES AVAILABLE:	WE21-3313G-10/XL	 CUT1					
WE21-3313G-9/L							
WE21-3313G-8/M							
WE21-3313G-7/S							
WE22-7313G-X/Y	WorkEasy 13 GY NT A2/B	A2B	Lightweight HPPE/ glass fiber knit. Dark grey microfoam nitrile coating.	4X32B	3	A2	LEVEL 3
SIZES AVAILABLE:	WE22-7313G-9/L	 A2 B					
WE22-7313G-8/M							
WE22-7313G-7/S							
WE22-7313G-6/XS							

CORESHIELD™ MICRO-FOAM NITRILE COATING



Enhanced cut resistance, comfort, ease of selection, cost-effectiveness. With Honeywell CoreShield™, simplified hand protection is at your fingertips.

INDUSTRIES

Manufacturing, Automotive, Metal stamping, Glass handling, Construction, Logistics

EASY TO CHOOSE

The color-coded marking system makes it easy for you to choose the gloves you need for your application, according to the new EN 388:2016 European standard and ANSI-105-2016 American standard. Choose by level of cut protection, grip, dexterity and fit.

EASY TO WEAR

One of the lightest-weight cut-protective gloves on the market, they help to prevent hand fatigue for workers who need to wear them all day long. Skin-friendly yarns that reduce the allergy risk to wearers. CoreShield™ gloves are certified STANDARD 100 by OEKO-TEX®.

COST-EFFECTIVE TO BUY

CoreShield™ High Performance Coating has special abrasion technology for x2 durability coating.

The washability of the glove material means that even after 5 washing cycles, there are no significant changes in performance or size.

SKU	PRODUCT NAME & DESCRIPTION	CUT LEVEL & COLOR CODING	EN388: 2016 PERFORMANCE	ANSI/ISEA 105:2016 PERFORMANCES	EN407 PERFORMANCES
21-1515B	CoreShield, 15 gauge nylon black liner, nitrile micro-foam black coating, A1/A	A1 A A1-A	4X31A	A1	6
22-7513B/10XL 22-7513B/9L 22-7513B/8M 22-7513B/7S 23-0513B	CoreShield, 13 gauge HPPE/basalt black liner, nitrile micro-foam black coating, A3/C	A3 C A2-B	4X43B	A2	6
21-151B/10XL 21-151B/9L 21-151B/8M 21-151B/7S 22-7513B	CoreShield, 13 gauge HPPE black liner, nitrile micro-foam black coating, A2/B				
24-0513B	CoreShield, 13 gauge HPPE/basalt black liner, nitrile micro-foam black coating, A4/D	A4 D A4-D	4X43D	A4	6
24-0513B/10XL 24-0513B/9L 24-0513B/8M 24-0513B/7S	CoreShield, 13 gauge HPPE/stainless steel black liner, nitrile micro-foam black coating, A5/E				
25-0513B	CoreShield, 13 gauge HPPE/alloy/basalt black liner, nitrile micro-foam black coating, A6/F	A5 E A5-E	4X42E	A5	6
26-0513B/10XL 26-0513B/9L 26-0513B/8M 26-0513B/7S	CoreShield, 13 gauge HPPE/alloy/basalt black liner, nitrile micro-foam black coating, A6/F				

SKU	PRODUCT NAME & DESCRIPTION	CUT LEVEL & COLOR CODING	EN388: 2016 PERFORMANCE	ANSI/ISEA 105:2016 PERFORMANCES	EN407 PERFORMANCES
29-0910B	CoreShield, 10 gauge HPPE/Kevlar/ alloy black	A9-F	4X44F	A9	6
SIZES:					
29-0910B/10XL	liner, smooth				
29-0910B/9L	nitrile black				
29-0910B/8M	coating, A9/F				
29-0910B/7S					

RIG DOG™ MUD GRIP



But, Rig Dog™ doesn't just offer safety. These gloves are durable and can absorb the sweat quickly and make your hand feel dry, so they are comfortable to wear during long shifts in tough environments. All of which helps to reduce costs and avoid downtime.

RIG DOG MUD GRIP

Back	Polyester and Spandex, with foam inside
TPR	Thermal Plastic Rubber (Polyester spacer fabric inside)
Palm-inner layer	Polyester
Palm-middle layer	Aramid, Polyester, Glass fiber and Steel fiber
Palm-outer layer	PU, Nylon and KPU
Fourchette (finger side panels)	Polyester and Polyurethane
Thumb crotch	Polyurethane, Nylon
Cuff	Black Neoprene and Nylon
Cuff binding	Nylon and Spandex
Hook-and-loop closure	Polyester

APPLICATIONS: Rigging, Drilling, Material handling, Shipbuilding

INDUSTRIES: Oil & Gas, Construction, Railways, Mining, Heavy-duty industries

SKU	PRODUCT NAME & DESCRIPTION	CUT LEVEL	EN388: 2016 PERFORMANCE	ANSI/ISEA 105:2016 PERFORMANCES	SIZES
42-623BO	Impact, ANSI A6 (ISO level F) cut palm, oil-based mud grip palm glove, hook-and-loop closure	4X44F		A6	42-623BO/10XL
					42-623BO/9L
					42-623BO/8

RIG DOG™ WATERPROOF



We know your #1 priority is keeping your workers out of harm's way. Rig Dog™ Waterproof gloves provide the ultimate protection, as well as the enhanced grip and dexterity your team needs in wet applications.

APPLICATIONS: Oil & Gas, Construction, Railways, Mining, Heavy duty industries

INDUSTRIES: Rigging, Drilling, Material handling, Ship building

RIG DOG MUD GRIP	
Back	Polyester and Spandex, with foam inside
TPR	Thermal Plastic Rubber (Polyester spacer fabric inside)
Palm-inner layer	Polyester
Palm-middle layer	Aramid, Polyester, Glass fiber and Steel fiber
Palm-outer layer	PU, Nylon and KPU
Fourchette (finger side panels)	Polyester and Polyurethane
Thumb crotch	Polyurethane, Nylon
Cuff	Black Neoprene and Nylon
Cuff binding	Nylon and Spandex
Water-resistant film	TPU

SKU	PRODUCT NAME & DESCRIPTION	CUT LEVEL	EN388: 2016 PERFORMANCE	ANSI/ISEA 105:2016 PERFORMANCES	SIZES
42-615BL	Impact, ANSI A6 (ISO level F) cut palm, water-resistant glove, slip-on cuff	A6	4X44F	A6	42-615BL/10XL, 42-615BL/9L, 42-615BL/8M

RIG DOG™ XTREME AND COLD PROTECT



These gloves are durable and can absorb the sweat quickly and make your hand feel dry, so they are comfortable to wear during long shifts in tough environments. All of which helps you reduce costs and avoid downtime.

APPLICATIONS: Rigging, Drilling, Material handling, Shipbuilding

INDUSTRIES: Oil & Gas, Construction, Railways, Mining, Heavy-duty industries

RIG DOG XTREME

Back	Polyester and Spandex, with foam inside
TPR	Thermal Plastic Rubber (Polyester spacer fabric inside)
Palm-inner layer	Polyester
Palm-middle layer	Aramid, Polyester, Glass fiber and Steel fiber
Palm-outer layer	CDP + Polyester + PU (+TPU Membrane)
Fourchette (finger side panels)	Polyester and Polyurethane
Thumb crotch	Blended Polyester and Polyurethane
Cuff	Black Neoprene and Nylon
Cuff binding	Nylon and Spandex
Hook-and-loop closure (one version)	Nylon and Polyester
Winter version (Rig Dog Cold Protect)	Polypropylene and Polyester

SKU	PRODUCT NAME & DESCRIPTION	CUT LEVEL	EN388: 2016 PERFORMANCE	ANSI/ISEA 105:2016 PERFORMANCES	SIZES
42-612BY	Impact, ANSI A6 (ISO level F) cut palm, slip-on cuff	A6	4X22FP	2	42-612BY/10XL, 42-612BY/9L, 42-612BY/8M

GRIP N HOT MILL GLOVE



The knitting technique gives the gloves perfect support, limits the penetration of dirt and offers a good touch. The gloves are ambidextrous and thus more cost-effective. The cotton lining reinforces the gloves' mechanical performance while absorbing hand perspiration for added comfort.

SKU	PRODUCT NAME & DESCRIPTION	SIZES
51/7147	Grip N Hot Mill	Men's (M)

GRIP N® KEVLAR® HOT MILL



Seamless knit: glove-within-a-glove design: kevlar and cotton outer shell and cotton/poly inner shell allows for thermal protection up to 400° F. The Nitrile 'N' coating on both sides of glove for added grip on wet or dry objects.

SKU	PRODUCT NAME & DESCRIPTION	ANSI	EN388
52/7457	7 Kevlar® and cotton outer glove and cotton/poly inner glove Yellow Nitrile N-pattern Rust	3	1441

NORTH NITRIGUARD PLUS™



Unsupported nitrile, chemical resistant gloves. Nitrile formulation contains no latex proteins which could cause allergic reactions. Nitrile offers superior resistance to cuts, snags, abrasions and punctures. Nitrile will not swell, sag or weaken from fat absorption. Complies with USDA and FDA regulations, 21 CFR, for use in food processing

APPLICATIONS: Aerospace and automotive degreasing, automotive assembling and painting, chemical handling and processing food processing, print and graphic shop cleanup

SKU	PRODUCT NAME & DESCRIPTION	GRIP/CUFF	EN388: 2016 PERFORMANCE	LENGTH/GAUGE	SIZES
LA258G	Green, sanitized interior	Snadpatch/Straight	4X22FP	18"/.25 mil	LA258G/10-H5 LA258G/9 LA258G/8

FLEXTRIL™ NITRILE CHEMICAL GLOVES



Honeywell Flextril is the hand protection solution providing fivefold performance – high chemical protection, reliable cut resistance, great wet and dry grip, enhanced dexterity and improved comfort. Moreover, with the printed QR code, you have all the performance data at your fingertips.

APPLICATIONS: Automotive industry, Chemical manufacturing, Machinery and equipment Oil and gas, Food processing, Metal fabrication

SKU	PRODUCT NAME & DESCRIPTION	PROTECTION RATINGS & CERTIFICATIONS
33-3765E/8M 33-3765E/9L 33-3765E/10XL	A3/C cut resistance with microfoam	
32-3011E/8M/N 32-3011E/9L/N 32-3011E/10XL/N	11mil/ 0.28mm unlined	

MULTITRIL V747 DISPOSABLE GLOVES



Properties and advantages

- Free from natural latex
- Snug fit
- Very high touch sensitivity
- Roughened fingertips for better grip
- Increased tear resistance

Special features

- Silicone-free glove surface (non-damaging to paint, automotive test method)
- Virus resistance tested according to ISO 16604:2004
- Tested according to the requirements of EN 455 (The glove is not a certified medical device within the meaning of Directive 93/42/EEC)
- Tested according to the requirements of Regulation (EU) No. 10/2011

APPLICATIONS: Food preparation and processing, Product protection, Electrical industry, Cleaning, and maintenance work, Surface disinfection

SKU	MATERIAL/ DESCRIPTION	LENGTH (MM)	TOTAL THICKNESS	COLOUR	SIZES
747	Nitrile Rolled edge, powder free	280-300	0.15	Blue	074707082C: size 7 (S) 074708082C: size 8 (M) 074709082C: size 9 (L) 074710082C: size 10 (XL)



**HONEYWELL NORTH
HEAD PROTECTION**

HONEYWELL NORTH SHORT BRIM HARD HAT - TOUGH HAT



NSB10001



NSB10002



NSB10003



NSB10004



NSB10015



NSB10071



NSB100CS
STRAP ONLY



NSB1101
VENTED

In workplace environments such as industrial or construction sites, high rotations of personnel are common practice and providing dozens of workers with certified head protection can be expensive. Choosing a less known manufacturer, you might get a product with compromised quality, not certified to the latest standards. That would put your workers' safety at risk and bring about possible customer service issues.

Features & Benefits:

HDPE Type I hard hat

Certifications:

- Annex II of the PPE Regulation (EU) 2016/425 Category III (non-vented)
- + Category II (vented)
- CE/EN (EN 397:2012 +Al:2012, EN 50365:2002 (non-vented versions) standard

- **Ratchet 4 point suspension**
- **“Dual-Locking” mechanism, prevents the hard hat to get loose in normal conditions**
- **Vented (NSB110) and non-vented (NSB100) options**
- **Electrical class: non-vented version as per EN 50365:2002**
- **Eight color options: White, Yellow, Orange, Grey, Dark Blue, Green, Red, and Black**
- **Resistant to temperatures from -30 °C to +50 °C**
- **Optional 4-point chin strap**
- **Compatible with Honeywell headgear (face shields, welding, hearing)**
 - CP5005 plastic face-shield bracket
 - 3796VS1 helmet adapter for cap mounted earmuffs
- **Comfort – provides a comfortable solution that can be worn all-day**



**HONEYWELL NORTH
RESPIRATORY PROTECTION**

5500 SERIES HALF MASK



5500 Series half mask with 2 P100 filters Respirator convenience packs the 5500 series is available in easy-to order convenience packs Convenience packs combine the most commonly used gas and vapor cartridges and/or particulate filters Available in medium size >See more product details.

SKU	PRODUCT NAME & DESCRIPTION	SIZES
-----	----------------------------	-------

550030*	Thermoplastic elastomer half mask	Sm/Med/Lrg
---------	-----------------------------------	------------

NORTH 7700 SERIES PREMIUM SILICONE HALF MASK



Converts to PAPR or supplied air respirator. Latex free. Lower headstraps stretch and move with the worker for more comfort without pulling on the facepiece. The benchmark in half masks designed to provide maximum comfort, fit and performance. Upper headstraps have minimum give to provide secure support. Various thickness in sealing area for improved comfort and support - more support around the chin area and more flexibility on the nose bridge. Wide, contoured sealing area for great fit.

SKU	PRODUCT NAME & DESCRIPTION	SIZES
-----	----------------------------	-------

770030*	Soft, comfortable and durable silicone half mask	Sm/Med/Lrg
---------	--	------------

5400 SERIES FULL FACEPIECE



The best value you can find in a full facepiece. Honeywell innovation: quality and attention to detail come together in an economically priced mask. Standard features include a nose cup and wide field of vision. The 5400 easily converts to a PAPR or Supplied Air respirator.

SKU	PRODUCT NAME & DESCRIPTION	SIZES
-----	----------------------------	-------

54001S	Thermoplastic elastomer full facepiece w/4-point headstrap	Small
--------	--	-------

54001	Thermoplastic elastomer full facepiece w/4-point headstrap	Med/Lrg
-------	--	---------

NORTH RU6500 SERIES FULL FACEPIECE



These full-face respirators are made by Honeywell North. Full-face reusable respirators are NIOSH-rated to cover the entire face to provide breathable air and protect eyes from irritation caused by gases, vapors, and airborne particles. Cartridges can be changed when they become dirty or when specific hazards are encountered. Filters and cartridges are compatible with a specific brand and mask model.

SKU	PRODUCT NAME & DESCRIPTION	SIZES
RU65001*	Silicone full facepiece w/5-point headstrap	Sm/Med/Lrg

N-SERIES COMBINATION GAS AND VAPOR CARTRIDGES WITH P100 PARTICULATE FILTERS



SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
7582P100L	Acid Gas with P100 Pair NIOSH approved for use against Acid Gases (Chlorine, Hydrogen Chloride, Sulfur Dioxide, Chloride Dioxide, Hydrogen Fluoride) Formaldehyde; and 99.97% filter efficiency for all particulates	Pair

N-SERIES PARTICULATE FILTERS



7580P100



75FFP100



75FFP100NL

SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
7580P100	P100 Filter Pair 99.97% efficiency for all particulates	Pair
75FFP100	Flexible, Low Profile P100 Filter Pair For use under welding helmets; 99.97% efficiency for all particulates	Pair
75FFP100NL	Flexible, Low Profile P100 Filter with Odor Relief Pair For use under welding helmets; 99.97% efficiency for all particulates, plus relief from odors caused by nuisance levels of organic vapors, acid gases and ozone	Pair



SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
7506N95	95% filter efficiency for non oil-based aerosol particulates	10/pack

N-SERIES GAS AND VAPOR CARTRIDGES



SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
75SCL	Defender™ Multi-Purpose Pair NIOSH approved for use against Organic Vapors, Ammonia, Methylamine, Formaldehyde and Acid Gases (Chlorine, Hydrogen Chloride, Sulfur Dioxide, Hydrogen Sulfide, Chlorine Dioxide, Hydrogen Fluoride)	Pair
N75001L	Organic Vapor Pair NIOSH approved for use against Organic Vapors	Pair
N75002L	Acid Gases Pair NIOSH approved for use against Acid Gases (Chlorine, Hydrogen Chloride, Sulfur Dioxide, Hydrogen Fluoride and Chlorine Dioxide) and Formaldehyde	Pair
N75003L	Organic Vapor and Acid Gases Pair NIOSH approved for use against Organic Vapors and Acid Gases (Chlorine, Hydrogen Chloride, Sulfur Dioxide, Hydrogen Fluoride, Hydrogen Sulfide and Chlorine Dioxide)	Pair
N75004L	Ammonia and Methylamine Pair NIOSH approved for use against Ammonia and Methylamine	Pair

N-SERIES COMBINATION GAS AND VAPOR CARTRIDGES WITH P100 PARTICULATE FILTERS



SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
7583P100L	Organic Vapor and Acid Gas with P100 Pair NIOSH approved for use against Organic Vapors and Acid Gases (Chlorine, Hydrogen Chloride, Sulfur Dioxide, Hydrogen Sulfide, Chlorine Dioxide, Hydrogen Fluoride); and 99.97% filter efficiency for all particulates	Pair

N-SERIES PARTICULATE FILTER ASSEMBLIES & ACCESSORIES



SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
N750036	Assembly for filters: Assembly for filters includes two (2) Pair N750027 covers and two (2) N750038 filter supports to attach filter pads to gas and vapor cartridges	Pair
N750035	Low Profile Filter Adapter: Allows user to stack the Each 75FFP100 or 75FFP100NL on a North cartridge, converting the filter to a P100 pad filter	Each
N750029	Black Shower Cap: For use with North low-profile Each cartridge/filter combinations and 7580P100. Deflects moisture during decontamination shower, and sparks and slag during welding and grinding	Each

COVER LENSES



808364

SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
80836A	Peel-away cover lens, clear, for 5400, 7600 and CF7800 Series full facepieces	Three sheets per set, 5 sets per pack

INHALATION & EXHALATION VALVES, SUSPENSION SYSTEM & MASKS



770018B



DF300H910
N95

SKU	PRODUCT NAME & DESCRIPTION	PACKAGING
770017B	Inhalation Valve	Bulk
770018B	Exhale Valve Flap Replacement	PK/100
770092	Cradle Suspension System	EA
DF300H910 N95	Safety DF300 H910P N95 Flatfold Disposable Respirator	BX/50



770092



770017B



PLANT SOLUTIONS LTD.

A TRUSTED PARTNER

CONTACT US FOR MORE INFORMATION

 www.plantsoltt.com

 1-868-235-3645

 sales@plantsoltt.com

 #5 Ramrattan Maharaj Trace, Debe, Trinidad
West Indies.

Connect with us on social media
[@plantsolutionsltd.](https://www.instagram.com/plantsolutionsltd/)



Honeywell
NORTH

Honeywell
MILLER

Honeywell

Honeywell
HOWARD
LEIGHT