


PRODUCT SPECIFICATION BULLETIN

DKCC-15.5(CBB60,400V)

Rated Voltage	400V~
Rated frequency	50/60Hz
Rated capacitance	15.5 μ F
Capacitance tolerance	$\pm 5\%$
Dissipation factor	≤ 0.006 (100Hz)
AC test voltage	a) T-T : 2Un/60s b) T-C : 2.5KV/60s (50Hz或60Hz)
Rated minimum and maximum temperatures	-40/100°C
Altitude	≤ 3000 m
Type	B Dry-type capacitor
Case material	Plastic
Carton Dimension	453x292x184mm
Carton Quantity	40PCS
N. W.	3.65KG
G. W.	4.65KG

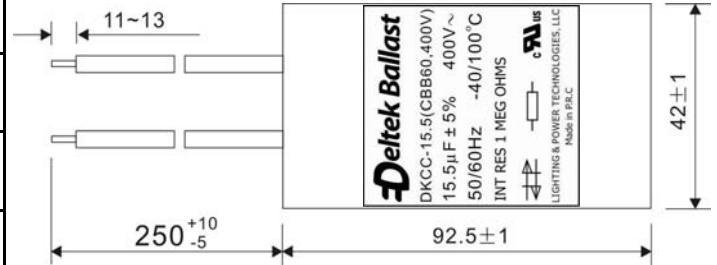

Unit (mm)

cULUS
E345926

Lighting and Power
Technologies LLC

7101 Whisperfield Dr. Plano, TX 75024

PH: 972-624-5000 Fax: 972 624-5800

Tech Support: 877 666-5267

sales@lightingandpowertech.com

www.lightingandpowertech.com