

**CODE: 90286-40-5K**

## LED WRAPROUND LIGHT

### PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness.
- ❖ High efficiency LED Driver, voltage AC120-277.
- ❖ Sheet iron design, better cooling, light quality, LED Tj < 85°C.
- ❖ The 0-10V Dimming type is continuous.
- ❖ The product can dim to 10%.

### Additional Information:

- Power: 40W
- Input: AC 120-277V
- CCT : 3500K/4000K/5000K
- Output: 5372.5 LM
- Light Source: SEOUL
- Driver: SIMON POWER



MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	



### PRODUCT APPLICATIONS:

The Wraparound LED Lighting Series can be widely used for Indoor Excellent for Offices, Hallways, Multipurpose Rooms , Office Buildings, Conference Rooms,super market, store and many other applications.

### Specifications


Wraparound-2FT/4FT  
Length:622MM/1211.8MM(24.5"/47.7")  
Width: 180MM(7.1")  
Depth:71MM(2.8")  
Weight:4.45/7.94 (lbs)

### Mounting

- ❖ Surface Mounting.

### Packaging information

- ❖ **Inside the box:**1235MMX186MMX76MM  
48.6"X7.32"X3"
- ❖ **carton:** 1250MMX326MMX207MM(A case of four)  
49.2"X12.83"X8.15"

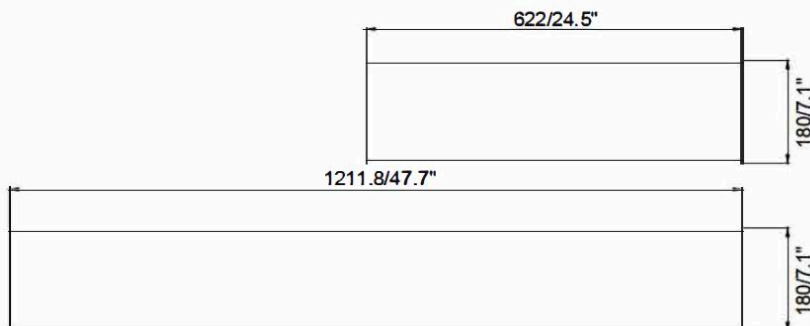


## LED WRAPROUND LIGHT

### TECHNICAL PARAMETERS:

Type	CODE: 90286-40-5K		
Power	40W	Lighting Angle	101°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.98	Working Life	>75000 hrs
Driver Efficiency	>90%	Working Temperature	-20 - +50°C
Luminous Flux	5372.5 Lm	Storage Temperature	-20 - +50°C
Color Temperature	3500K/4000K/5000K	Protection Level	Dry
CRI	Ra>80	Cable	Input Connect, No Cable

### PHOTOMETRIC

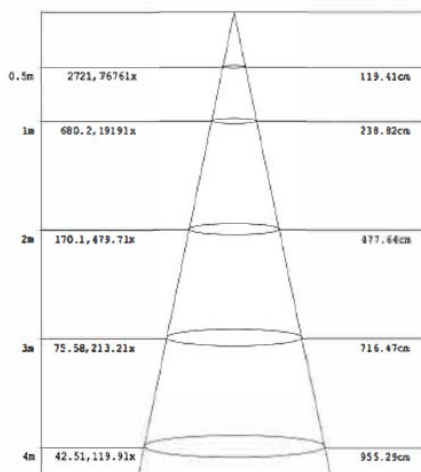

	4FT	40W	XXK
Product	Size	Power	ColorTemp
Led Wrapround Light	2 FT (2feet)	40W	40K (4000K)
	4 FT (4feet)	40W(40W)	50K (5000K)