

## **SPECIFICATION**

### **SS-120C Series LED Driver**

**Model: SS-120C-XX**

**Description: 120W LED DRIVER**

**Rev.: V04**

**Release Date: 2018-04-08**



## REVISION HISTORY



SOSEN

## Features

- Efficiency up to 91%
- Optional dimming function: 0-10V, PWM, Resistor, Timing
- IP65 rated; Suitable for Dry, Damp and Wet Locations
- Protections: SCP, OTP, OVP
- Metal case with full potted for hazardous scenarios
- Surge Protection: L/N-PE: 4kV, L-N 4kV
- 5 years warranty



## Description

SS-120C series are constant current LED driver with input voltage 90-305Vac and high power factor. They are specifically designed for LED high bay luminaries, with low standby power, high efficiency, compact housing and good thermal management, which greatly enhance the reliability and lifespan. Comprehensive protections, including Over Voltage Protection, Short Circuit Protection and Over Temperature Protection, ensure proper functioning.

## Model List

Model	O/P Voltage	O/P Current	Max. O/P Power	O/P Current Tolerance	THD (Typ.)	PF (Typ.)	Efficiency (Typ.)
SS-120C-40*	24-40V	2.0-3.75A	120W	±5%	7%	0.98	90%
SS-120C-54*	27-54V	1.5-2.85A	120W	±5%	7%	0.98	91%
SS-120C-68*	40-68V	1.2-2.15A	120W	±5%	7%	0.98	91%

### Note:

1. Default Tested at 230Vac, full load, Ta 25°C.
2. Optional B, T or space in the place of \* means additional function.  
Space is the base model without any optional function;
  - Suffix B for model with 3-in-1 dimming (0-10V, PWM, Resistor);
  - Suffix T for model with timing control.



## Input Characteristics

Parameter	Min	Typ.	Max	Remarks
Rated AC input range	100 Vac		277 Vac	
AC input range	90 Vac		305 Vac	
Input frequency range	47Hz		63Hz	
Max input current			1.6A	90Vac, full load
Inrush current			60A	Cold start, 347Vac/50Hz , Twidth=650us measured at 50% Ipeak
No load power		1W	2W	277Vac/50Hz, no load
Power factor	0.95	0.98		230Vac/50Hz, full load
	0.9			100-277Vac/50Hz, 70-100% Load
THD		7%	10%	230Vac/50Hz, full load
			20%	100-277Vac/50Hz, 70-100% Load

## Output Characteristics

Parameter	Min	Typ.	Max	Remarks
Output voltage range	SS-120C-40*	24V		40V
	SS-120C-54*	27V		54V
	SS-120C-68*	40V		68V
Rated output voltage	SS-120C-40*	32V		40V
	SS-120C-54*	42V		54V
	SS-120C-68*	56V		68V
Rated output current	SS-120C-40*	3.00A		3.75A
	SS-120C-54*	2.25A		2.85A
	SS-120C-68*	1.75A		2.15A
Current adjustable range	SS-120C-40*	2.00A		3.75A
	SS-120C-54*	1.50A		2.85A
	SS-120C-68*	1.20A		2.15A
No load voltage	SS-120C-40*	40.5V	41.5V	42V
	SS-120C-54*	54.5V	55.5V	56V
	SS-120C-68*	68.5V	69.5V	70V
Efficiency @230Vac	SS-120C-40*	88%	90%	Output 40V/3A, see Fig. 5
	SS-120C-54*	89%	91%	Output 54V/2.25A, see Fig. 5
	SS-120C-68*	89%	91%	Output 68V/1.75A, see Fig. 5
Output current tolerance	-5%		+5%	
Output voltage ripple (PK-PK)		1%	2%	Full load



SOSEN

Output current ripple (PK-PK)		5%	10%	Full load
Start-up current overshoot			10%	
Start-up time		1S	2S	230Vac
Line Regulation	-1%		+1%	Full load
Load Regulation	-2%		+2%	

## Other Characteristics

Parameter	Min	Typ.	Max	Remarks	
0-10V Dimming (Optional)	Dim Vmax	0V	14V	3 in 1 Dimming; 0-5V Dimming Optional; Negative Logic Dim Optional	
	Dim Range	10%I <sub>max</sub>	100%I <sub>set</sub>		
	Voltage	1V	10V		
	OFF	0.3V	0.7V	Dim-off value	
	ON	0.5V	0.9V		
PWM Dimming (Optional)	High	5V	10V		
	Low	-0.3V	-0.6V		
	Frequency	200Hz	2KHz		
	PWM Duty	1%	99%		
Resistor Dimming (Optional)	Resistance	10K ohm	100K ohm		
	Dimming	10%I <sub>max</sub>	100%I <sub>set</sub>		
Timing Curve (Optional)	IC Control	By programming			
	Timing	5H/6H/7H/8H per section			
Protection	OTP	80°C	85°C	Shut down o/p voltage, re-power on to recovery	
	Short Circuit Protection	Driver will not damaged with short-circuit power <10W			
Life time		55,000hrs		230Vac, full load, T <sub>c</sub> 75°C, See Fig. 6	
MTBF		200,000hrs		230Vac, full load, T <sub>a</sub> = 25°C, (MIL-HDBK-217F)	
Temperature Coefficient	-0.03%/ $^{\circ}$ C		+0.03%/ $^{\circ}$ C	T <sub>c</sub> : 0°C ~ 90°C	
T <sub>c</sub>			85°C		
Warranty		5 years		T <sub>c</sub> : 75°C	
Net Weight		1200g			
Dimension	Φ132mm*71mm			D x H	

**NOTE:** All the parameters above are tested T<sub>a</sub> 25°C, unless specified.



SOSEN

## Environmental Requirements

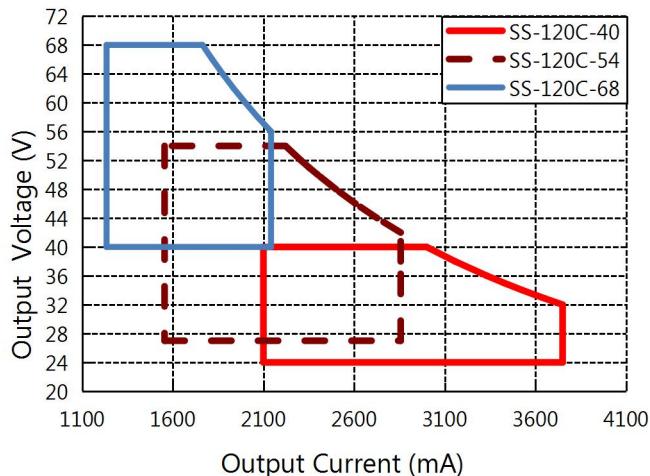
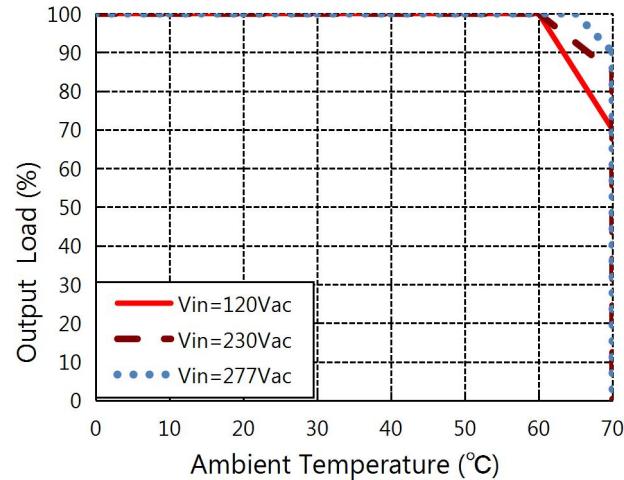
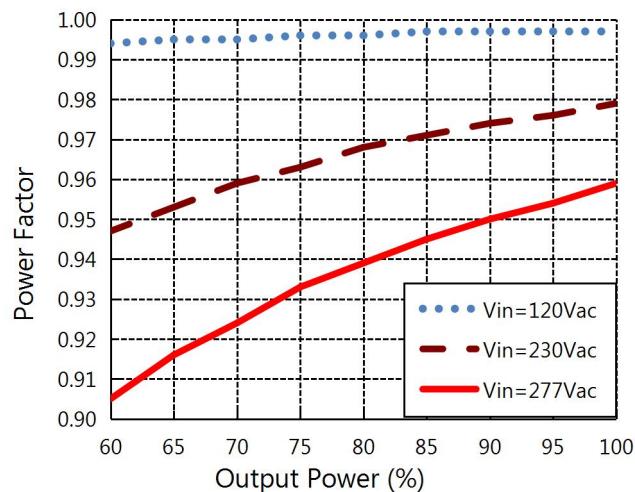
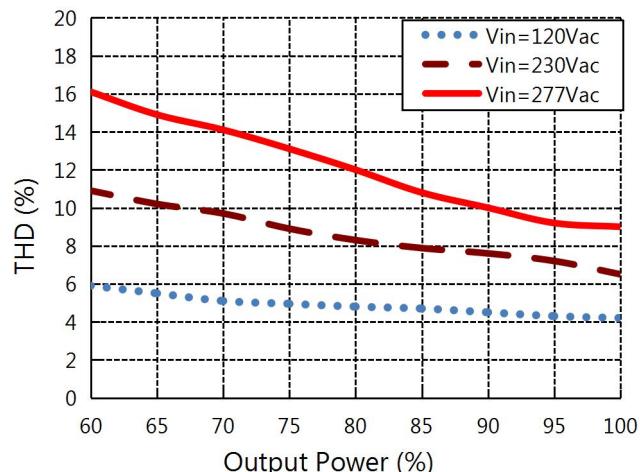
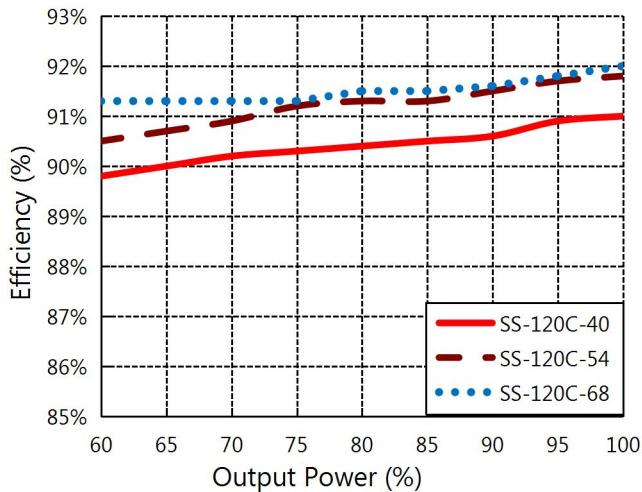
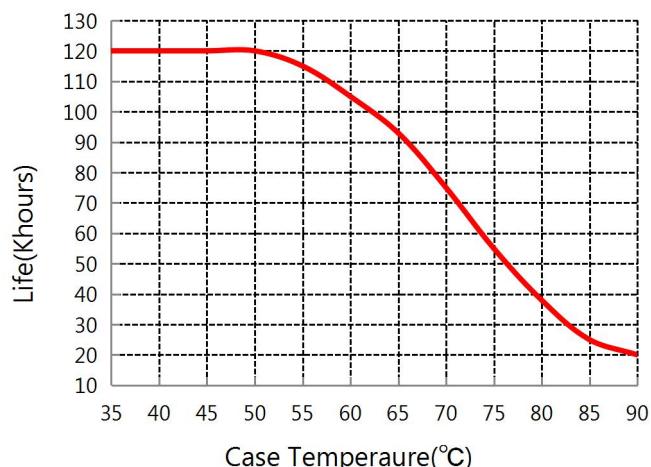
Parameter	Min	Typ.	Max	Remarks
Operating Temperature	-40°C	25°C	+60°C	See Fig. 2
Storage Temperature	-40°C	25°C	+85°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4,000m	
Cooling Method	Air Cooling			

## Safety and EMI/EMS Standards

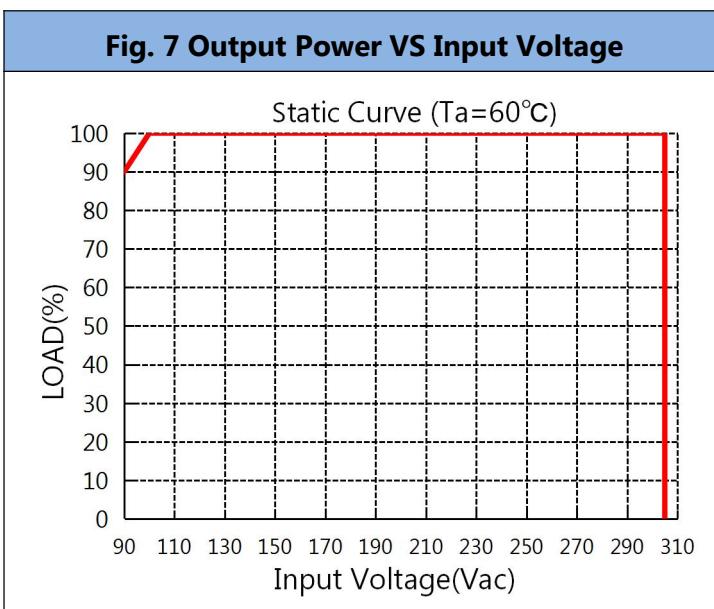
Certification	Standard	Status	Remark
UL/CUL	UL8750	✓	
TUV	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013 EN62493:2015	✓	
SAA	AS/NZS61347.2.13	✓	
CCC	GB 19510.14-2009	✓	
BIS	IS15885:2012 Part 2 Sec 13	✓	ONLY for -B models
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	
Item	Standard	Remark	
Insulation strength	Input-output	3200Vac/5mA Max/60s	Reinforced insulation
	Primary-Earth	1600Vac/5mA Max/60s	Basic insulation
	Sec.- Earth	1000Vac/5mA Max/60s	Function insulation
Insulation resistance	Input-output	≥10MΩ	Testing Voltage: 500Vdc
Ground resistor		≤0.1Ω	25A/1min
Leakage current		≤0.75mA	277Vac
Item	Criterion	Remark	
Conduction Emission	EN55015:2013+A1:2015		
Radiation Emission	EN55015:2013+A1:2015		
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C	
Surge	IEC/EN61000-4-5	Difference mode 4kV, Common mode 4kV Criterion B	

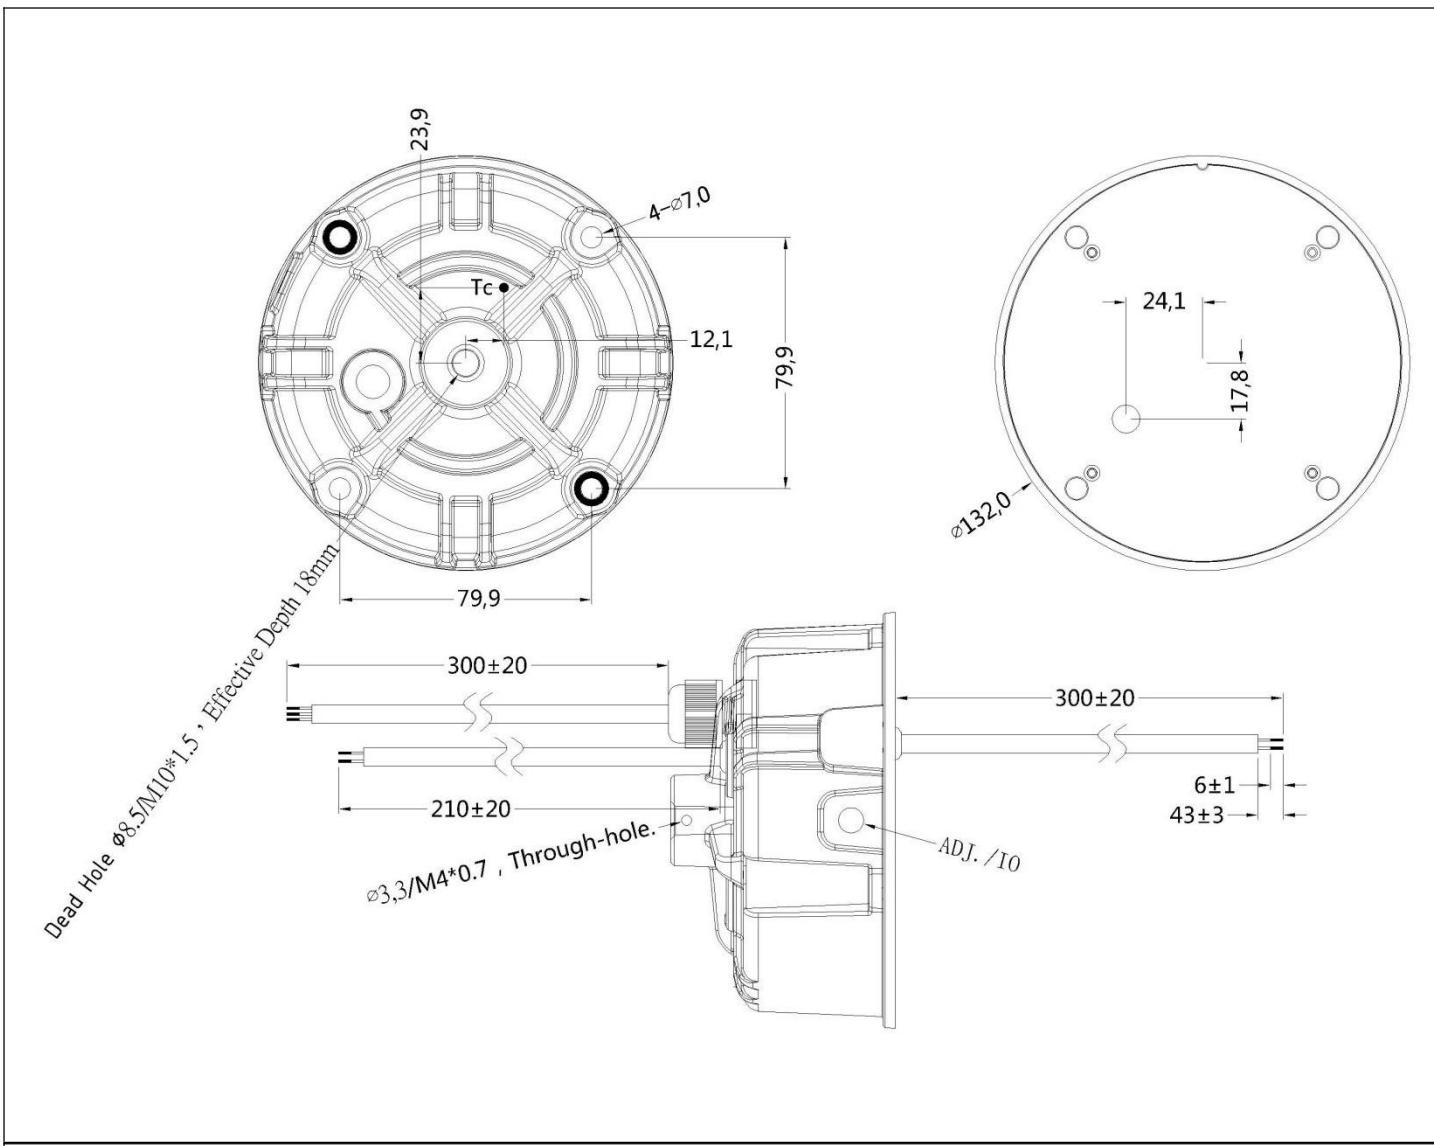
**NOTE:** SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.

## Performance Curves

**Fig. 1 O/P Voltage VS Output Current**

**Fig. 2 O/P Power VS Ambient Temperature**

**Fig. 3 Power Factor VS Output Power**

**Fig. 4 THD VS Output Power**

**Fig. 5 Efficiency VS Output Power**

**Fig. 6 Lifespan VS Case Temperature**


**Fig. 7 Output Power VS Input Voltage**



**Mechanical Characteristics (Unit: mm)**

**NOTE:**

Input Wire	UL model: UL SJTW #18AWG 3*0.824 mm <sup>2</sup> , O.D: 7.8mm, GREEN: PE, BLACK: L, WHITE: N Euro model: VDE H05RN-F 3*1.0 mm <sup>2</sup> , O.D: 7.4mm, BROWN: L, BLUE: N, YELLOW/GREEN: PE
Output Wire	UL model: UL SJTW #14AWG 2*0.824mm <sup>2</sup> , O.D: 7.6mm, RED: V+, BLACK: V- Euro model: VDE H05RN-F 2*1.0 mm <sup>2</sup> , O.D: 7.0mm, BROWN: V+, BLUE: V-
Suffix B DIM	STYLE 2733 #22AWG O.D: 5.8mm, PURPLE: DIM+, GRAY: DIM-



SOSEN

**Lighting and Power**  
Technologies LLC

**C Series, 120W Round LED Driver, V04**

## Labels

UL



**MODEL:SS-120C-40B**

SOSEN Constant Current LED Driver

ACL---BLACK

ACN---WHITE

---GREEN

MADE IN CHINA

HTTP://www.szsosen.com

Manufacturer: Shenzhen Sosen Electronics Co.,Ltd

INPUT: 100-277V~ 1.5A 50/60Hz

t<sub>c</sub>:85°C V+---RED

t<sub>a</sub>:60°C V---BLACK

OUTPUT: 24-40V--- 2.0-3.75A Max.42V Max.120W

DIM+---PURPLE

DIM---GRAY

Suitable for Dry, Damp and Wet Locations

For LED modules use only

RoHS SELV

E360758

TUV/SAA/CE



**MODEL:SS-120C-40B**

SOSEN Constant Current LED Driver

ACL---BROWN

ACN---BLUE

---GREEN/YELLOW

MADE IN CHINA

HTTP://www.szsosen.com

Manufacturer: Shenzhen Sosen Electronics Co.,Ltd

A3 building, Gonghe Fourth Industrial Area, Shajing Street, Baoan

District, 518104 Shenzhen, PEOPLE'S REPUBLIC OF CHINA

V+---BROWN

V---BLUE

t<sub>c</sub>:85°C

t<sub>a</sub>:60°C

INPUT: 100-277V~ 1.5A 50/60Hz

OUTPUT: 24-40V--- 2.0-3.75A Max.42V Max.120W

DIM+---PURPLE

DIM---GRAY

Suitable for Dry, Damp and Wet Locations

For LED modules use only

RoHS SELV

CCC



**MODEL (型号): SS-120C-40B**

LED DRIVER(LED模块用交流电子控制装置)

INPUT  
(输入端)

ACL---BROWN (棕)

ACN---BLUE (蓝)

---GREEN/YELLOW  
(绿黄)

HTTP://www.szsosen.com

MADE IN CHINA 制造地:中国

Manufacturer: Shenzhen Sosen Electronics Co.,Ltd

制造商: 深圳市崧盛电子股份有限公司

INPUT(输入): 100-240V~ 1.5A 50/60Hz

277V~ 0.7A 50/60Hz

(277V~只适用于北美)

OUTPUT(输出): 24-40V--- 2.0-3.75A Max.42V

输出功率: 120W(LED模块)

OUTPUT  
(输出端)

V+---BROWN (棕)

V---BLUE (蓝)

DIM+---PURPLE (紫)

DIM---GRAY (灰)

For LED modules use only

RoHS SELV

BIS



**MODEL:SS-120C-40B**

LED Driver

ACL---BROWN

ACN---BLUE

---GREEN/YELLOW

MADE IN CHINA

HTTP://www.szsosen.com

MANUFACTURER: SHENZHEN CITY SOSEN ELECTRONICS CO.,LTD

INPUT: 100-277V~ 1.5A 50/60Hz

OUTPUT: 24-40V--- 2.0-3.75A Max.42V Max.120W

Suitable for use in Dry, Damp and Wet Locations

For LED modules use only

V+---BROWN

V---BLUE

t<sub>c</sub>:85°C

t<sub>a</sub>:60°C

DIM+---PURPLE

DIM---GRAY

IS15850(Part 2)(Sec. 13)

R-41041440

RoHS SELV

IS15850(Part 2)(Sec. 13)

R-41041440

**Lighting and Power Technologies**

7101 Whisperfield Drive, Plano, TX 75024 Ph: 877-666-5267 Fax: 972-624-5800

sales@lightingandpowertech.com www.lightingandpowertech.com

## Dimming Diagram



- Output current could be adjusted by connecting 0-10V or PWM signal between DIM+ and DIM-
- DO **NOT** connect DIM- and V- to avoid abnormal output

### 0-10V Dimming(Typ.), See Fig. 8

Voltage Range	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Rated current percentage	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%-108%

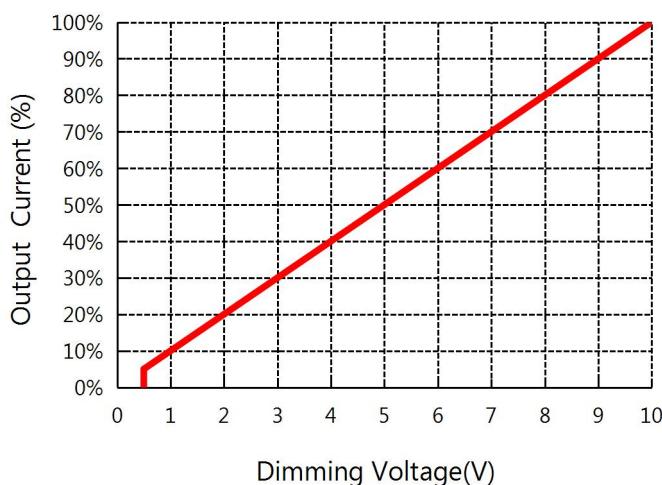
### 10V PWM frequency range (Typ.): 200Hz-2KHz, See Fig. 9

PWM duty	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Rated current percentage	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%-108%

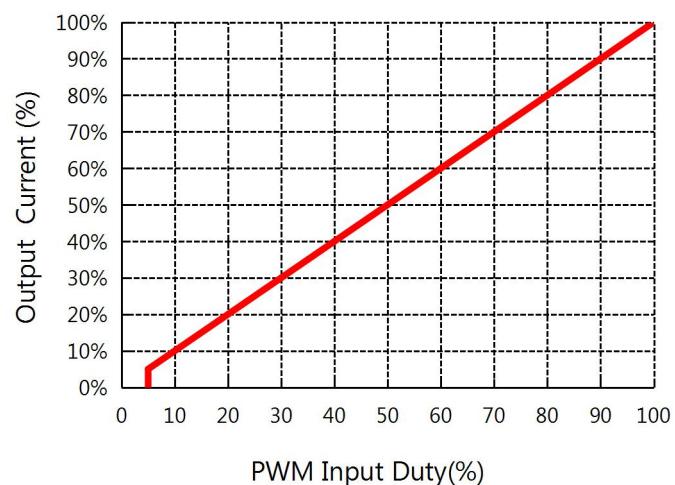
### Resistor (Typ.), N represents the number of power supplies

Resistor	10KΩ /N	20KΩ /N	30KΩ /N	40KΩ /N	50KΩ /N	60KΩ /N	70KΩ /N	80KΩ /N	90KΩ /N	100KΩ /N	OPEN
Rated current percentage	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%-108%

**Fig. 8 0-10V Dimming Curve**



**Fig. 9 PWM Dimming Curve**



## Installation Tips

1. Highly recommended to seal the adjustable hole with silicon glue (#704 preferred) after adjusting the driver's output current. Torsion with proper strength to avoid permanent damage to the potentiometer inside.
2. Pls confirm the integrity of the product if the package is broken when you receive goods, and the crack is not allowed on the outside of the driver's structure.
3. The screw thread need to meet the length of 15-22mm and integrate to the thread hole of the driver tightly and firmly and make sure all the screws and ring are locked firmly.
4. Whole luminaire's wight should be less than 11kg with the driver(1.2kg).
5. Dimming leads should be capped if not in use to avoid dimming circuit damage caused by external signals.

## Package, Transportation & Storage

### 1. Package

- Outside carton dimension: L×W×H =500mm×390mm×170mm;
- 10PCS/Carton;
- Net weight/PC: 1.2kg;
- Gross weight/Carton: 13kg.

### 2. Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be shielded from direct sunshine, loaded/unloaded with caution.

### 3. Storage

The product storage meets the standard of the GB 3873—83.

Products should be rechecked if stock for over 1 year before installation.