

CODE: 80208K

Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	50 / 60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
CFQ26W/G24q	2	120	52	0.45	0.98	<1.7	1.00	1.92	12
		277	50	0.20	0.92	<1.7	1.00	2.00	15
	1	120	28	0.24	0.98	<1.7	1.00	3.57	12
		277	29	0.11	0.92	<1.7	1.00	3.45	15
CFTR26W/GX24q	2	120	52	0.45	0.99	<1.7	1.00	1.92	10
		277	49	0.19	0.92	<1.7	1.00	2.04	15
	1	120	27	0.23	0.98	<1.7	1.10	4.07	12
		277	29	0.11	0.92	<1.7	1.10	3.79	15
CFS21W/GR10q	2	120	52	0.44	0.98	<1.7	1.12	2.15	12
		277	49	0.19	0.92	<1.7	1.12	2.29	15
CFTR42W/GX24q	1	120	49	0.45	0.90	<1.7	0.98	2.00	15
		277	45	0.18	0.92	<1.7	0.98	2.18	15
CFTR32W/GX24q	1	120	35	0.30	0.98	<1.7	0.98	2.80	12
		277	37	0.14	0.93	<1.7	0.98	2.65	15
CFTR57W/GX24q	1	120	47	0.40	0.98	<1.7	0.88	1.87	12
		277	48	0.19	0.93	<1.7	0.88	1.83	15
CFQ57W/G24q	1	120	46	0.40	0.97	<1.7	0.88	1.91	12
		277	47	0.18	0.93	<1.7	0.88	1.87	15
CFS28W/GR10q	1	120	31	0.27	0.95	<1.7	1.00	3.23	15
		277	33	0.13	0.93	<1.7	1.00	3.03	15
CFS38W/GR10q	1	120	35	0.30	0.98	<1.7	0.80	2.29	12
		277	37	0.15	0.90	<1.7	0.80	2.16	15
FT24W/2G11	2	120	48	0.40	0.99	<1.7	0.93	1.94	10
		277	48	0.19	0.91	<1.7	0.93	1.94	15
	1	120	26	0.22	0.98	<1.7	0.93	3.58	12
		277	25	0.10	0.91	<1.7	0.93	3.72	15
FT18W/2G11	2	120	34	0.29	0.99	<1.7	0.93	2.74	10
		277	38	0.15	0.93	<1.7	0.93	2.45	15
FT40W/2G11	1	120	43	0.37	0.98	<1.7	0.90	2.09	12
		277	41	0.16	0.91	<1.7	0.90	2.20	15
FT39W/2G11	1	120	42	0.36	0.98	<1.7	0.90	2.14	12
		277	43	0.17	0.90	<1.7	0.90	2.09	15
FT36W/2G11	1	120	33	0.28	0.98	<1.7	0.82	2.48	12
		277	33	0.13	0.91	<1.7	0.82	2.48	15
FC16T9/G10q	1	120	39	0.33	0.98	<1.7	1.00	2.56	12
		277	38	0.15	0.90	<1.7	1.00	2.63	15
FC12T5/2GX13	1	120	38	0.32	0.98	<1.7	1.00	2.63	12
		277	40	0.16	0.91	<1.7	1.00	2.50	15
FC9T5/2GX13	1	120	29	0.24	0.99	<1.7	1.01	3.48	10
		277	25	0.10	0.90	<1.7	1.01	4.04	15

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: -20°F, -28°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non-consumer Limits
- UL "HL" rated for hazardous locations
- 3-Year Warranty
- UL, cUL 935 Listed, Class P, Type 1 Outdoor
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- RoHS Compliance

PHYSICAL DIMENSIONS:


Length (L): 4.34"
Width (W): 2.40"
Height (H): 1.00"
Mounting (M1): 2.00"
Mounting (M2): 4.63"

Options: also available versions


- without studs
- with lead wires



WIRING DIAGRAM:

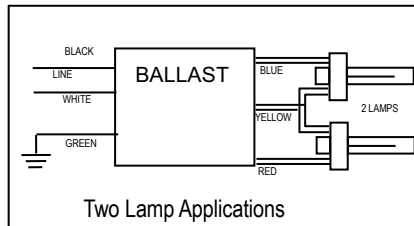

Two Lamp Applications



Single Lamp Application

HOT SPOT LOCATION:

