

CODE: 80240

Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

Electronic Sign Ballast for 4, 3, 2 and 1 F120T12HO lamps.

Electronic Sign Ballast for 4, 3, 2 and 1 F96T8HO lamps.

ELECTRICAL SPECIFICATIONS:

Lamp		Lamp Footage		Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Max. THD %
Type	#	Min	Max						
F120T12HO	4,3,2,1	10	40	120	352	3.00	>0.98	<1.7	10
F120T12HO	4,3,2,1	10	40	277	349	1.30	>0.95	<1.7	10
F96T8HO	4,3,2,1	8	32	120	330	2.80	>0.98	<1.7	10
F96T8HO	4,3,2,1	8	32	277	325	1.25	>0.95	<1.7	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: -20°F, -29°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non Consumer Limits

APPROVALS:


- UL, cUL 935 Listed
- Meet DOE requirement

PHYSICAL DIMENSIONS:


Length (L): 14.45"
Width (W): 3.23"
Height (H): 2.20"
Mounting (M): 13.75"

Lead Length:

White, Black 24"
Blue 132"x132"x132"x132"
Red 132"x132"

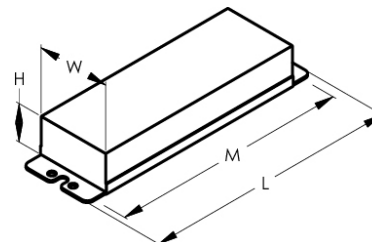

WIRING DIAGRAM:

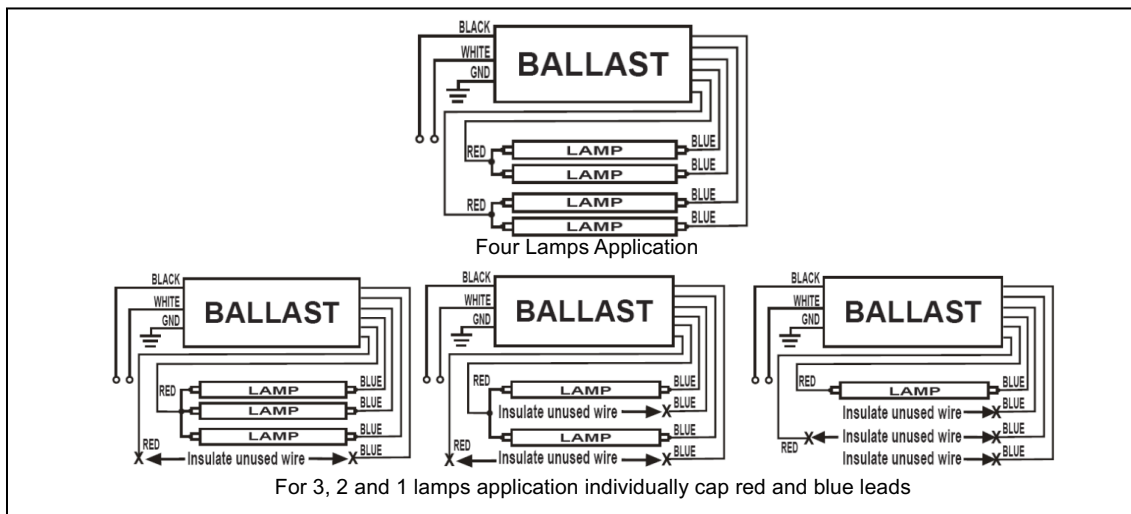

Hot Spot Location:

