


Step Down Auto-transformer (Non-Isolated)
Maximum output power: 150VA @277V output 125VA @240V output
Input voltage: 480/347Vac $\pm$ 10%
Number of outputs: One
UL 5085
IP20 design for dry and damp location
5 year warranty

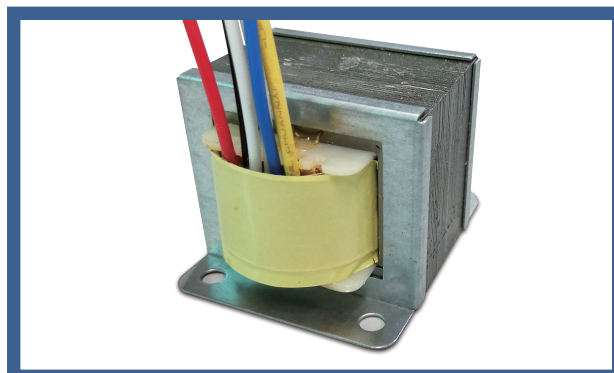

SPECIFICATIONS

Input voltage range:	480/347Vac $\pm$ 10%
Frequency:	60Hz
Max input current:	0.33A @480V with 100% load condition / 0.051A @480V with open load condition 0.45A @347V with 100% load condition / 0.061A @347V with open load condition
Efficiency:	95% Typical
No load power consumption:	< 8W
Withstand voltage:	Input to output, 2,000Vac, 10mA
Sound rated:	A
UL/cUL	UL5085 approved
Maximum case temperature :	105°C

PHYSICAL DIMENSIONS


Length (L):	2.76" (70mm)
Width (W):	2.32" (59mm)
Height (H):	1.93" (49mm)
Mounting (M):	2.17" (55mm)

PACKAGING

0.87kg / unit ; 18pcs / carton ; 1008pcs / pallet	
Carton size:	280 x 220 x 120 mm
Carton weight:	16 kg

WIRE SPECIFICATIONS

Input:	14", UL 1316 #18AWG (Red, Yellow and White)
Output:	14", UL 1316 #18AWG (Black, Blue and White)

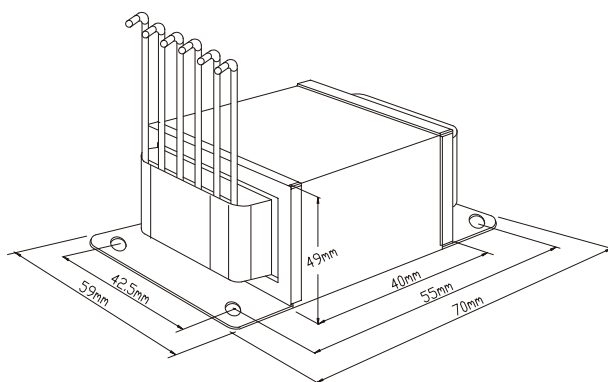

WIRING DIAGRAM

