

DB-286HO-MV-TP-IS

Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F96T8/HO (86W)	2	120	148	1.25	0.99	< 1.7	0.84	0.57	< 10
		277	148	0.55	0.98	< 1.7	0.84	0.57	< 10
	1	120	96	0.80	0.99	< 1.7	0.95	0.97	< 10
		277	96	0.36	0.97	< 1.7	0.95	0.95	< 10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Non Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: > 40kHz
- 5-Year Warranty


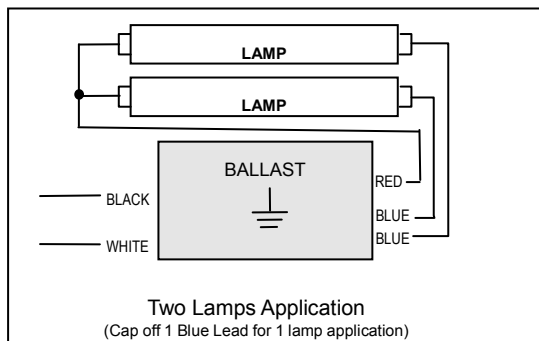
APPROVALS:

- UL, cUL 935 Listed, Class P, Type 1 Outdoor

PHYSICAL DIMENSIONS:

Length (L): 9.50"
Width (W): 2.36"
Height (H): 1.69"
Mounting(M): 8.90"

Lead Length:
White, Black 25"
Blue 58"
Red 66"

**WIRING DIAGRAM:****Hot Spot Location:**