

**CODE: 90260-100**

## WALL PACK LIGHT



### PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness.
- ❖ High efficiency LED Driver, voltage AC120-277.
- ❖ Cast Aluminum design, better cooling, light quality, LED Tj < 85°C.
- ❖ The 0-10V Dimming typel.
- ❖ Photocell Control ( Optional ).



### Additional Information:



- Power: 100W
- Input: AC 120-277V
- CCT : 4000K/5000K
- Output: 13334 LM
- Light Source: LUMILEDS
- Driver: NOVBO POWER

|              |  |
|--------------|--|
| MODEL #      |  |
| PROJECT:     |  |
| NOTES:       |  |
| DATE:        |  |
| PREPARED BY: |  |



### PRODUCT APPLICATIONS:

The WALL PACK LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums, Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications.

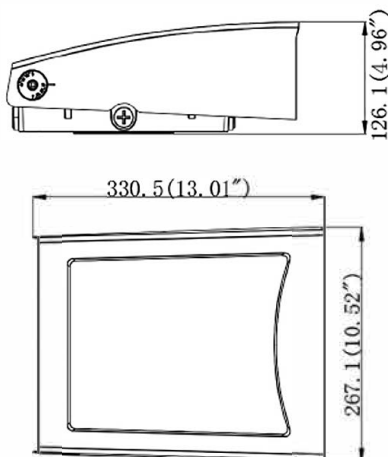

### Structure Features:




- Shell Materials: Aluminum & PC
- Finish: Dark Bronze/White/black
- Net Weight: 3.32KG (7.3 LBS)
- Product Size: 330mm\*267mm\*126mm
- Carton Size: 380mm\*300mm\*180mm

## WALL PACK LIGHT

### TECHNICAL PARAMETERS:

| Type              | CODE: 90260-100 |                      |                         |
|-------------------|-----------------|----------------------|-------------------------|
| Power             | 100W            | Lighting Angle       | 89°                     |
| Input Voltage     | AC120-277V      | LED Brightness Decay | <5%/6000 hrs            |
| PF                | >0.98           | Working Life         | >75000 hrs              |
| Driver Efficiency | >90%            | Working Temperature  | -30 - +45℃              |
| Luminous Flux     | 13334 Lm        | Storage Temperature  | -40 - +80℃              |
| Color Temperature | 4000K/5000K     | Protection Level     | Wet Location            |
| CRI               | Ra>80           | Cable                | Input Connect, No Cable |

### PHOTOMETRY:

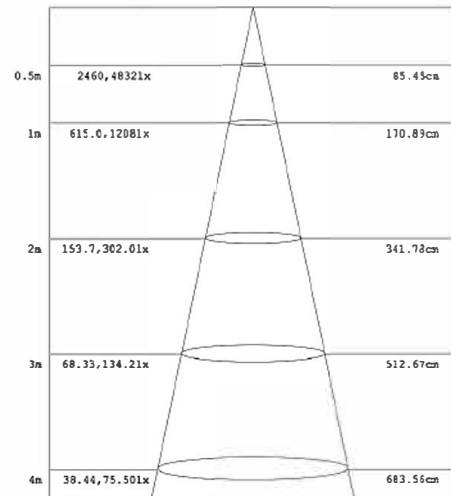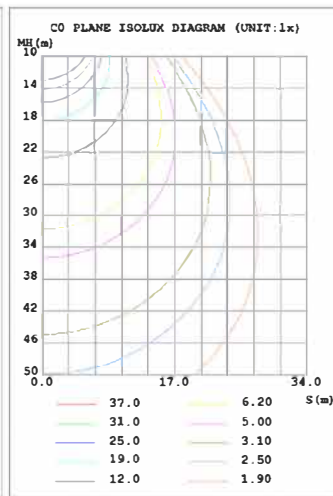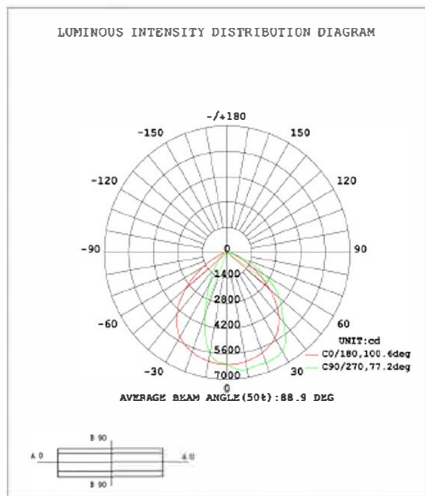

|         | 10W       | SWP                                    | 27               | XXK                                  | Z                                                        | Y              |
|---------|-----------|----------------------------------------|------------------|--------------------------------------|----------------------------------------------------------|----------------|
| Company | Power     | Product                                | Voltage          | ColorTemp                            | FINISH                                                   | Control        |
|         | 10W(100W) | SWP<br>Slim<br>Adjustable<br>Wall Pack | 27<br>AC120-277V | 40K (4000K)<br>50K (5000K)<br>± 500K | D (Dark Bronze)<br>W (White)<br>B (Black)<br>S (Silvery) | P<br>Photocell |