


Straight Round Steel poles, 3" & 4" & 5"

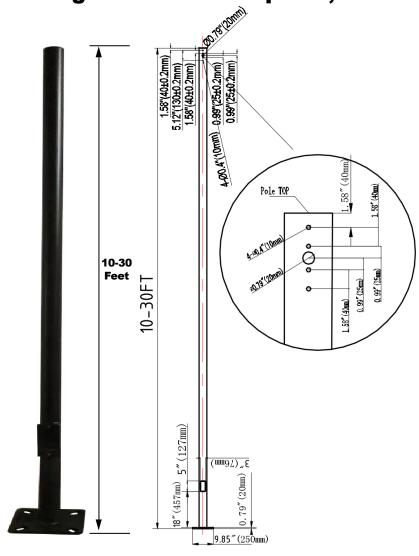

The WISDOM Series Round Steel poles are built from high strength Steel Round tube and are available side drilled for arm mounted area lighting luminaires or with tenon mounts for flood and post top luminaires. Typical area lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 10 to 30 feet can be used based on selected luminaire application.

Specifications and Features: Pole

Specifications:

Conforms to ASTM-A 500 Grade B: Minimum Yield Strength of 46,000 PSI.

Finish:

Textured Architectural Bronze Powdercoat Finish, Baked to Ensure Maximum Paint Adhesion, Hardness and Durability.

Anchor Bolts:

Anchor Bolts are Included, Sized Based on Pole Data Charts for the Selected Pole Size.

Base Cover:

Poles are Provided With a Two-Piece Formed Steel Base Cover that is Easily Assembled and Fitted Over Pole Base.

Pole Length:


Poles are Available in Standard Lengths as Shown in the Order Matrix. Poles can be Custom Cut to Order. Consult Factory.

Mounting Options:

Standard Length Poles Include 2%" OD Tenon, Side Drilled 2@180 Degrees, Polycarbonate Top Cover and Hole Plugs for Unused Drilling Locations.

Cut To Order Poles can be Side Drilled for 2@180 Degrees, Includes Polycarbonate Top Cover and Hole Plugs for Unused Drilling Locations.

Cut To Order Poles May Also Be Ordered With 2%" OD Tenons for Use With Post Top Decorative Luminaires, Flood/Area Slip Fitter Fixtures, or Any of a Wide Variety of Pole Top Mounting Accessories.

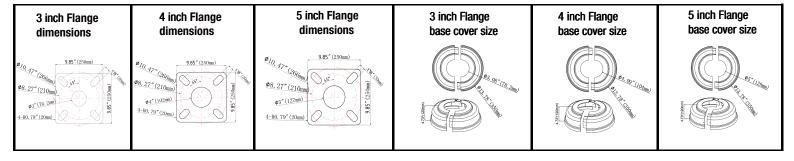


Specifications:

| Specification type | 10FT | 15FT | 20FT | 25FT | 30FT | |
|--------------------|-----------|-----------|-----------|-----------|-----------|--|
| CODE: RLP10 | | | | | | |
| CODE: RLP15 | | | | | | |
| CODE: RLP20 | L=3.0 (m) | L=4.6 (m) | L=6.1 (m) | L=7.6 (m) | L=9.1 (m) | |
| CODE: RLP25 | | | | | | |
| CODE: RLP30 | | | | | | |



Dimension data:

| Catalog # | Mt. height | Wall thickness | Shaft size | Pole weight | Bolt projection | EPA 70 | EPA 80 | EPA 90 | EPA 100 | EPA 110 | EPA 120 |
|-------------|------------|----------------|------------|-------------|-----------------|-----------|-----------|-----------|------------|------------|------------|
| CODE: RLP10 | 10 ft. | 11 gauge | 3 inch | 46 lbs. | 2.75 in. | 28.2 | 23.5 | 20.1 | 14.4 | 13.3 | 11.6 |
| CODE: RLP15 | 15 ft. | 11 gauge | 4 inch | 90 lbs. | 2.75 in. | 18.2 | 15.5 | 13.1 | 11.5 | 9.9 | 7.4 |
| CODE: RLP20 | 20 ft. | 11 gauge | 4 inch | 117 lbs. | 2.75 in. | 12.2 | 10.3 | 9 | 7.2 | 6 | 4.6 |
| CODE: RLP25 | 25 ft. | 11 gauge | 4 inch | 139 lbs. | 2.75 in. | 11.9 | 8.9 | 7.7 | 6.1 | 5.6 | 4.2 |
| CODE: RLP30 | 30 ft. | 11 gauge | 5 inch | 180 lbs. | 2.75 in. | 9.2 | 7.4 | 6.1 | 5.8 | 4.8 | 3.2 |

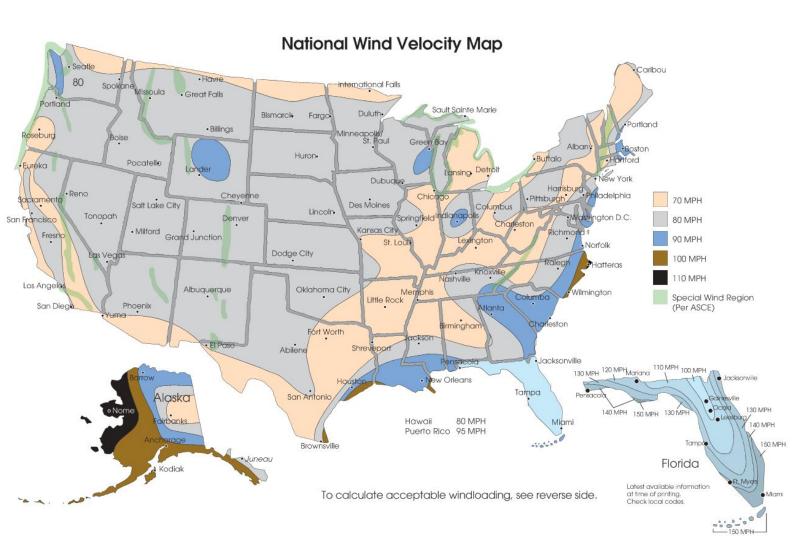





SQUARE EXTERNAL MOUNT HORIZONTAL TENON · To mount 2/3/4 fixtures on an existing pole



Low Profile Bullhom with 3 Tenons

NO. WSD-VTS4R-3T-D MAX EPA: 1.6 Finish: Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round Externa Mount Horizontal Tenon and adjusted horizontally.




Low Profile Bullhom with 2 Tenons

NO. WSD-VTS4R-2T-D

MAX EPA: 1.0 Finish: Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round Externa Mount Horizontal Tenon and adjusted horizontally.



Triple 120° Horizontal Tenon Adaptor

NO. WSD-QT120-3T-D MAX EPA: 1.4 Finish: Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.



Quad 90° Horizontal Tenon Adaptor

NO. WSD-QT90-4T-D MAX EPA: 1.8

Finish: Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally

WALL BRACKET

• Attaches to any flat surface

Provides wiring access


MID-POLE TENON BRACKET



90° Wall Mount Bracket with 2-3/8" O.D. Tenon

Finish: Dark Bronze MAX FPA: 0.6

USE: The 90° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8* O.D. tenon to mount a fixture with our adjustable slip-fitter Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.




2-3/8" OD Horizontal Tenon Mid-Pole Bracket

NO. WSD-ADP2.5-D

Finish: Dark Bronze MAX EPA: 0.3


USE: 2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with a adjustable slip-fitter onto a 2-3/8" OD horizontal tenon.

ROUND EXTERNAL MOUNT HORIZONTAL TENON · To mount 2/3/4 fixtures on an existing pole

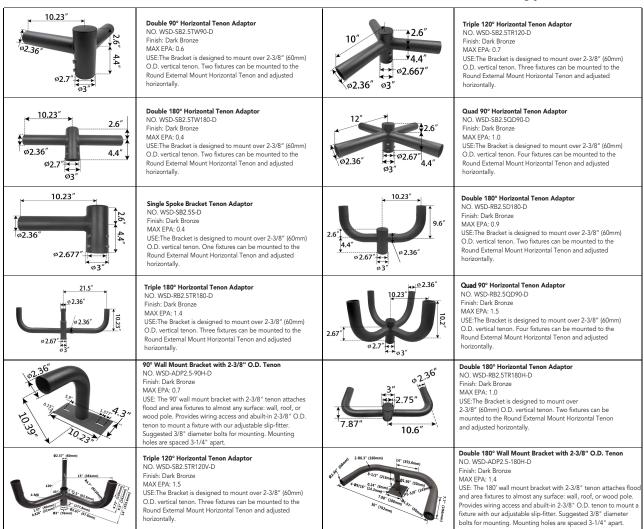




POLE BRACKET • For mounting one fixture on an existing pole

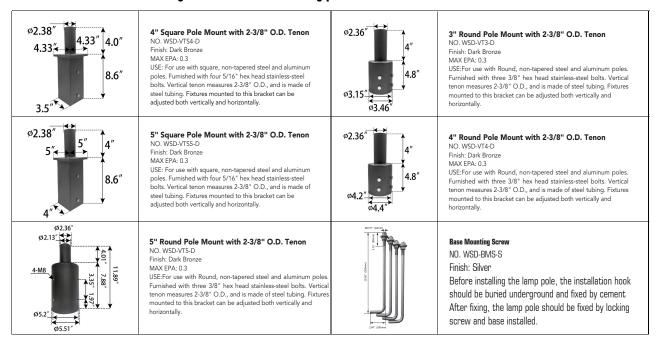

MOUNTING OPTIONS:

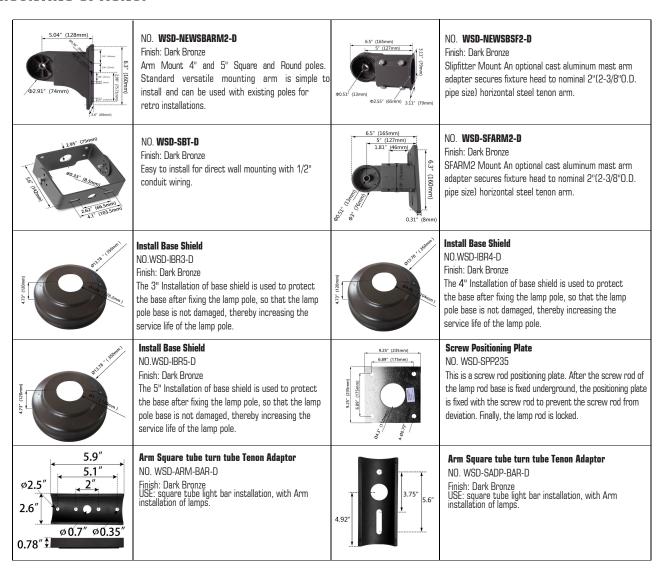





ORDERING EXAMPLE:

| | R | 10FT | 3 | 11G | D |
|---------|---------------------|---|-------------------------------------|----------------|-------------------------|
| Company | Product | Height | Size | Wall Thickness | Finish |
| LPT | Round Steel pole | 10FT (3.0M) 15FT (4.6M) 20FT (6.1M) 25FT (7.6M) 30FT (9.1M) | 3 (3inch) 4 (4inch) 5 (5inch) | 11 (11gauge) | D Dark Bronze |

Fixture Configurations:



Light pole top:



Installation:

