


Specification Sheet	Product	100W 24V Outdoor Constant Voltage LED Driver	Version: 1.0	Page:1/2
	Model	HQLPV100/123/24/DE1	Date	2018-7-4

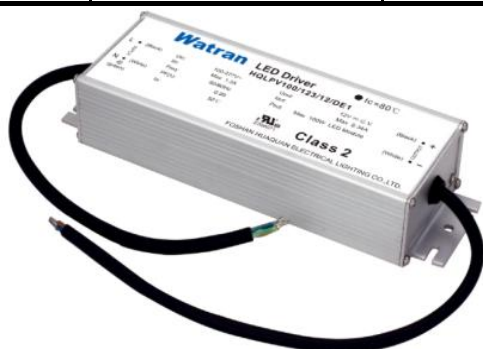

■Features:

- Universal AC input:100~277VAC.
- Built-in active PFC function.
- Protections: Short circuit, Over temperature protection.
- cooling by free air convection.
- IP67, input/output ports are connected to the wire.
- Constant voltage output.
- Suitable for LED lighting applications.
- Comply to UL lighting equipment safety regulations.
- Can be applied to dry/wet in the rain, indoor outdoor.
- 3 years warranty.

**OUTDOOR CONSTANT VOLTAGE
LED DRIVER**



SPECIFICATION


INPUT	Voltage range	Rated voltage range:100~277VAC , Input voltage range:90~305VAC	
	Frequency range	47~63Hz	
	Power factor	PF≥0.90 at 277VAC (100%full load) PF≥0.95 at 100VAC (100%full load)	
	Efficiency(Typ.)	≥88%	Test condition: Input Voltage 277VAC,100% full load.
	AC current	≤1.20A/100VAC (100%full load)	
	Start up inrush current(Typ.)	cold start: 60A Max. /277VAC	
	Leakage current	Contact current ≤0.7mA at 277VAC, Protect conductor current ≤2mA at 277VAC	
	THD	<20%	
OUTPUT	Output channel	1 channel	
	Output current and voltage	3.96A Max.	
		24Vdc	
	Tolerance	±5%	
	Output ripple Voltage	<10% (100% full load)	
	Output overshoot / undershoot voltage	≤5%,when power open and shut down	
	Start up time	0~1S,100VAC ; 0~0.5S,277VAC	
	Short circuit protection	Products without damage, when abnormal condition removed , re-power on to recover.	
Over temperature protection	Protection shell maximum temperature 110 ℃, over temperature protection startup, shut down output, can be automatically restored after the temperature is normal		
ENVIRONMENT	Working TEMP.	-40~+50℃ (100%full load)	
	Max. CASE TEMP.	80℃ (100%full load)	
	Working humidity	20~95%RH, non-condensing	
	Storage TEMP.,humidity	-40~+80℃ , 10~95%RH	
	Vibration	10~500Hz, 5G 12min/1 cycle, period for 72min.each along X、Y、Z axes	
SAFETY&EMC	Safety standards	UL8750, IEC61347-1, IEC61347-2-13	
	Withstand voltage	I/P-O/P:3.75KVAC 60S, I/P-FG:1.875KVAC, O/P-FG:0.5KVAC	
	Isolation resistance	I/P-O/P,I/P-FG,O/P-FG:> 100MΩ at 500VDC/25℃/70%RH	
	EMC emission	ANSI.C63.4:2009 Class B	
	EMC immunity	Surge impulse tes: L-N,6KV; L,N-G,6KV	
LIFE	50,000 hours at Ta		
SIZE	233x74x42.2 mm(LxWxH),find below dimension.		
WEIGHT	1150g/PCS		
NOTE	1.All parameters NOT specially mentioned are measured at 220VAC input , rated load and 25℃ of ambient temperature . 2.The LED driver is considered as a component that will be operated in combination with final equipment , since EMC performance will be affected by the complete installation ,the final equipment manufacturers must re-qualify EMC directive on the complete installation again . 3.Detail warranty terms please refer to warranty statement.		

FM73045C

Specification Sheet	Product	100W 24V Outdoor Constant Voltage LED Driver	Version: 1.0	Page:2/2
	Model	HQLPV100/123/24/DE1	Date	2018-7-4

■ SIZE

UNIT: mm TOERLANCE: ±1mm

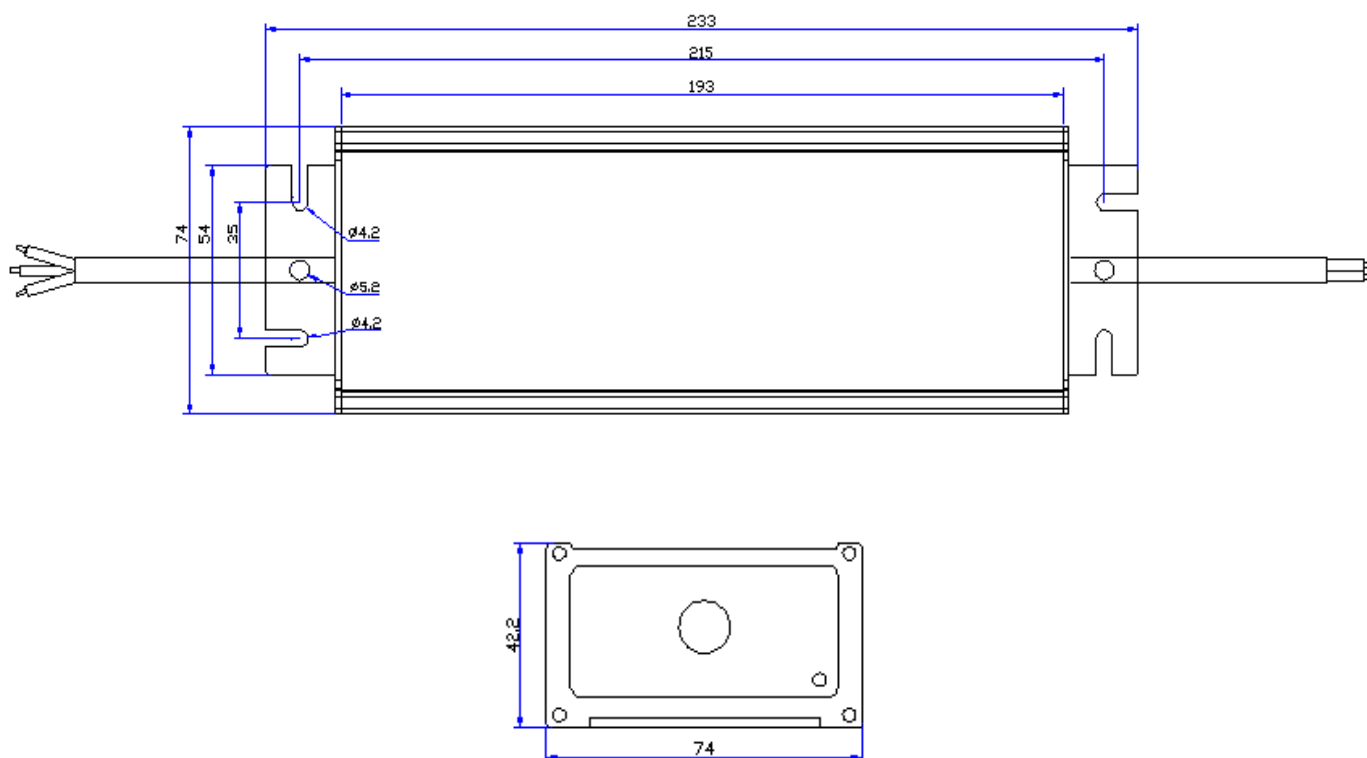

■ WIRE

Input wire: Rubber wire SJTW 18AWG×3C 105℃ 300V Black/green/white ,
Line length 200±20mm, decortication 30mm, endothelial 5mm solder;
Output wire: Rubber wire SJTW 18AWG×2C 105℃ 300V Black/white ,
Line length 200±20mm, decortication 30mm, endothelial 5mm solder;

The technical data and information in this specification is owned by HUAQUAN ,
we reserve the right to change without prior notice.

Please refer to the actual products provided by HUAQUAN for specific details.