

CODE: 80242

Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

Electronic Sign Ballast for 6, 5 and 4 T12HO lamps up to 8ft long or any combination thereof from 8-48 ft.

Electronic Sign Ballast for 6, 5 and 4 T8HO lamps up to 6ft long or any combination thereof from 16-36 ft.

ELECTRICAL SPECIFICATIONS:

Lamp		Lamp Footage		Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Max. THD %
Type	#	Min	Max						
T12HO (F96T12/HO)	6,5,4	8	48	120	410	3.50	>0.98	<1.7	10
T12HO (F96T12/HO)	6,5,4	8	48	277	405	1.50	>0.97	<1.7	10
T8HO (F72T8/HO)	6,5,4	16	36	120	370	3.20	>0.98	<1.7	10
T8HO (F72T8/HO)	6,5,4	16	36	277	365	1.36	>0.96	<1.7	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: -20°F, -29°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non Consumer Limits


APPROVALS:

- UL, cUL 935 Listed
- Meet DOE requirement


PHYSICAL DIMENSIONS:

Length (L): 14.45"
Width (W): 3.23"
Height (H): 2.20"
Mounting (M): 13.75"

Lead Length:
White, Black 24"
Blue (6)144"
Red (2)144"

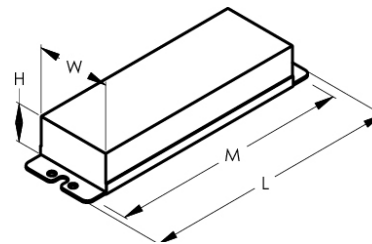

WIRING DIAGRAM:

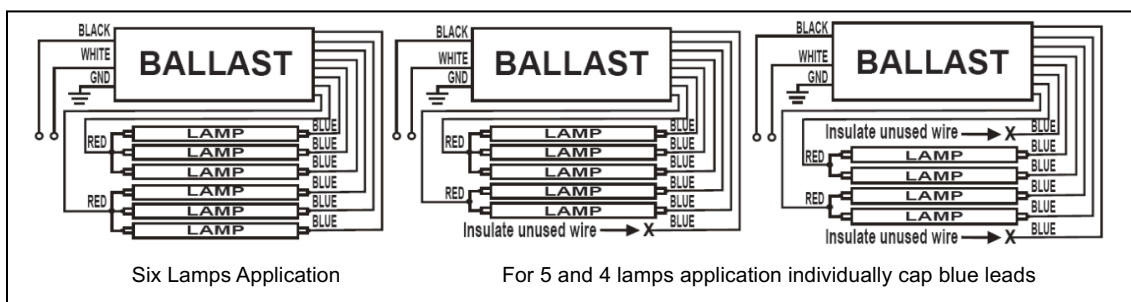

Hot Spot Location:

