


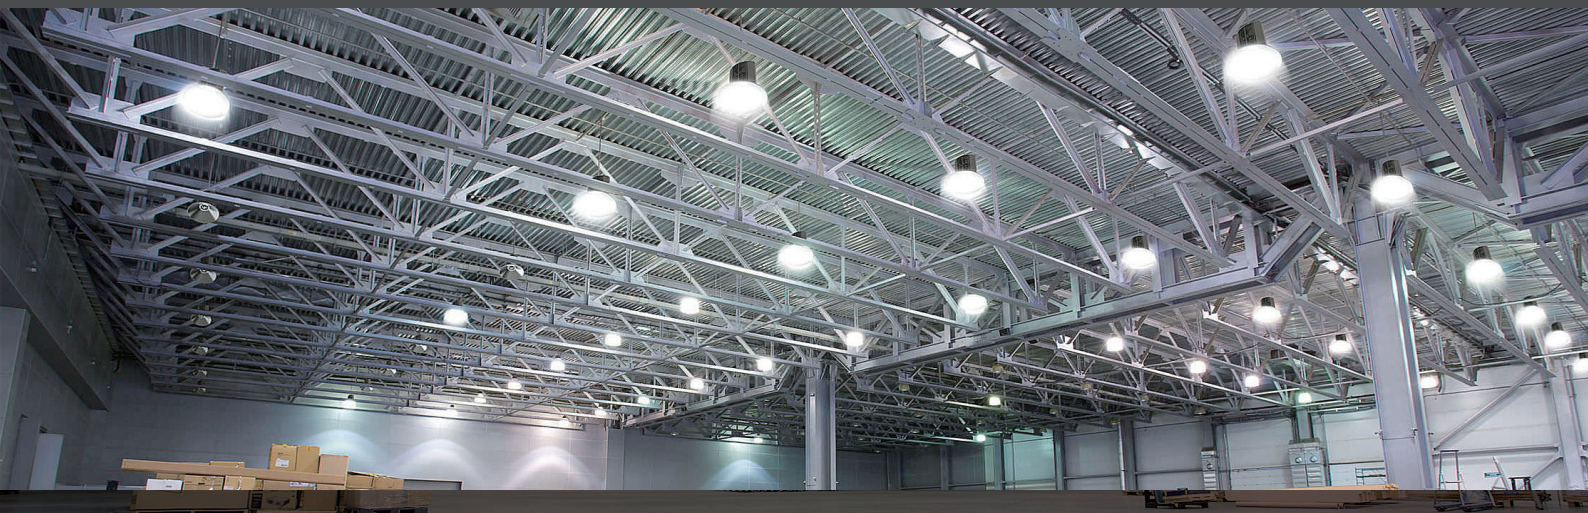

Applications:

Suitable for commercial, retail and institutional applications including gymnasiums, factories and warehouses.

Features

- Efficiency higher than 160lm/W, designed to replace 750W and 1000W HID while consumes 250W and 340W.
- Open the drive compartment cover from below to facilitate inspection and assembly.
- 0-10V dimming standard for a dimming range of 100% to 0%.
- 120 degree lens guarantees light intensity and light uniformity.
- Hook(default included) or Conduit pendant way for different applications.
- Optional motion sensor can be offered for maximizing energy savings.
- Optional adjustment dial allows the fixture to meet higher ambient temperature requirements.
- Operating temperature is -40°C to 65°C (-40°F to 149°F).
- Resistant to shock and vibration.
- UL/cUL wet location and DLC qualified.



Mounting

Suitable for Hook or 3/4" Conduit pendant.

Motion Sensor

Optional motion sensor allows for security and energy saving.



Housing

Symmetrical design for consistent installed results. A large number of heat sinks for maximum heat dissipation. Combined with sensor detect added into the system, more energy would be saved and pretty less maintenance than HID technology.

Condenser Lens




A lens that is both high temperature resistant and aesthetically pleasing to achieve maximum output luminous flux.

PERFORMANCE DATA

		4000K(70CRI)		5000K(70CRI)		
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW	Temperature
200W	120-277VAC	32300lm	162lm/W	32800lm	164lm/W	-40°C to 65°C
200W	347-480VAC	32500lm	163lm/W	33000lm	165lm/W	-40°C to 65°C
250W	120-277VAC	40000lm	160lm/W	40100lm	160lm/W	-40°C to 55°C
250W	347-480VAC	40300lm	161lm/W	41000lm	164lm/W	-40°C to 55°C
300W	120-277VAC/347-480V	48500lm	162lm/W	49500lm	165lm/W	-40°C to 65°C
340W	120-277VAC/347-480V	54300lm	160lm/W	55500lm	163lm/W	-40°C to 55°C

DIMENSION

unit: inch/mm

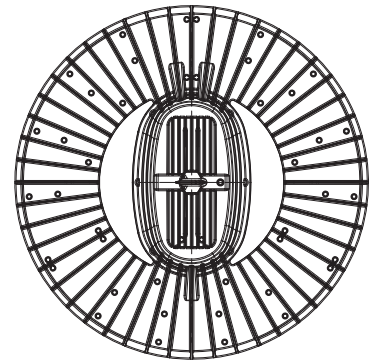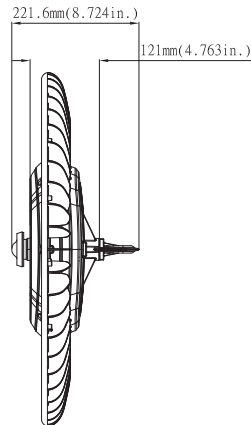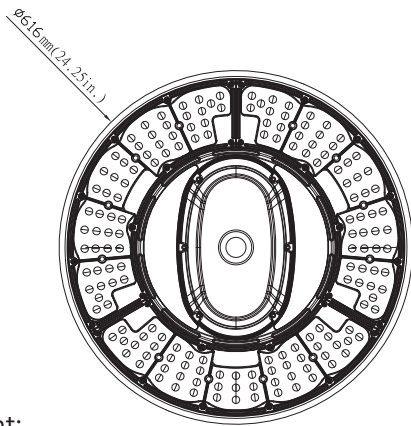

Weight:

200W/250W: 16.27lbs

300W/340W: 17.57lbs

ORDERING GUIDE

Fixture Type	Wattage	Voltage	CCT	Finish	Sensor (Option)	Adjustment Dial (Option)	Surge Protection (Option)	Internal Code
90165 High Bay	200 200W	27V 120-277V	40K 4000K	D Dark Bronze	M	AD	S	Blank
	300 300W	48V 347-480V	50K 5000K	B Black	With Sensor	With Adjustment Dial	Surge protection	Alphanumeric
	250 250W			W White	Blank	Blank	(Blank)	
	340 340W				Without Sensor	Without Adjustment Dial	No Surge protection	

Note: 1. 200W and 300W are obtained by 250W and 340W using adjustment dial.

2. 200W or 300W is recommended when the ambient temperature is -40°C to 65°C (-40°F to 149°F).

3. 250W or 340W is recommended when the ambient temperature is -40°C to 55°C (-40°F to 131°F).

Lighting and Power Technologies

7101 Whisperfield Drive, Plano, TX 75024 Ph: 877-666-5267 Fax: 972-624-5800
sales@lightingandpowertech.com www.lightingandpowertech.com

DLC Model NO

SYSTEM WATTS	VOLTAGE	CCT	DLC NO.	DLC Classification
200W	120-277V	4000K	MHB05200W27V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05200W27V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05200W27V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05200W27V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
	347-480V	4000K	MHB05200W48V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05200W48V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05200W48V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05200W48V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
250W	120-277V	4000K	MHB05250W27V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05250W27V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05250W27V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05250W27V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
	347-480V	4000K	MHB05250W48V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05250W48V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05250W48V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05250W48V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
300W	120-277V	4000K	MHB05300W27V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05300W27V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05300W27V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05300W27V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
	347-480V	4000K	MHB05300W48V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05300W48V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05300W48V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05300W48V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
340W	120-277V	4000K	MHB05340W27V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05340W27V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05340W27V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05340W27V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
	347-480V	4000K	MHB05340W48V40K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05340W48V50K[D,B,W][Blank,M][Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		4000K	MHB05340W48V40K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium
		5000K	MHB05340W48V50K[D,B,W][Blank,M]AD[Blank,S][Blank,A-Z, a-z, 0-9]	Premium