


CODE: E-90301-7




FEATURES

Injection-molded thermoplastic ABS housing
UL-94V-0 flame rating, fire-resistant
Input Voltage: 120/277V
Power consumption: 3.5W max.
Output: 3W max.
3.6V Nickel Cadmium Battery
Charging time: 24 hours
Discharge time: 90 minutes
Operating temperature: 0°C~40°C
Dimension: 299*184.5*44.6mm

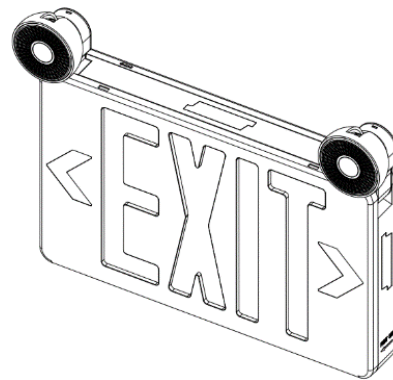

PHOTOMETRIC

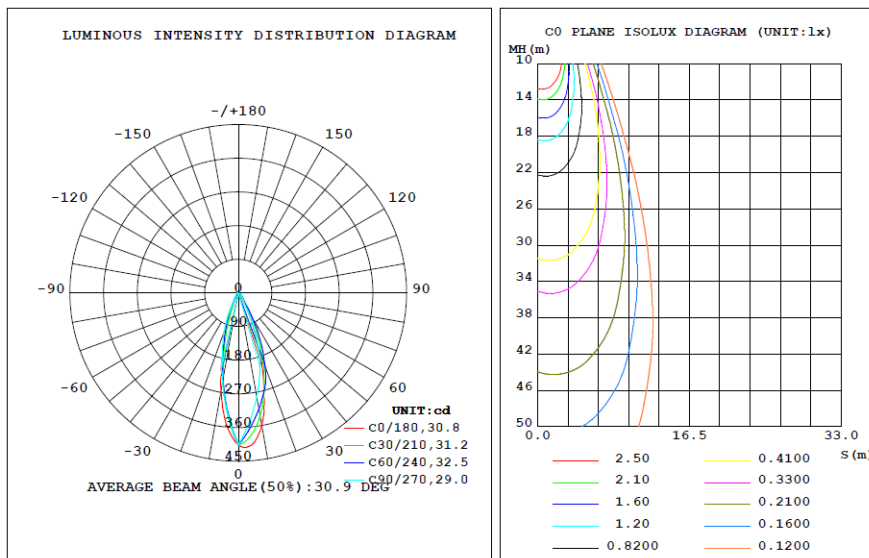

ORDER INFORMATION

Model	Voltage	Color	Emergency Duration	Certificate
LS-ES007SR	120/277V	Red	90 minutes	UL
LS-ES007SG	120/277V	Green	90 minutes	UL