

CODE: 80207K

Ballast Type	Electronic
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	50 / 60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
CFQ18WG24q	2	120	39	0.34	0.95	<1.7	0.95	2.44	15
		277	38	0.14	0.97	<1.7	0.95	2.50	15
	1	120	21	0.18	0.98	<1.7	1.00	4.76	12
		277	21	0.08	0.92	<1.7	1.00	4.76	15
CFTR18W/GX24q	2	120	39	0.33	0.99	<1.7	1.05	2.69	10
		277	38	0.14	0.97	<1.7	1.05	2.76	12
	1	120	22	0.19	0.99	<1.7	1.05	4.77	10
		277	22	0.09	0.93	<1.7	1.05	4.77	15
CFS21W/GR10q	2	120	40	0.34	0.98	<1.7	0.91	2.28	12
		277	39	0.15	0.97	<1.7	0.91	2.33	12
	1	120	21	0.18	0.99	<1.7	0.90	4.29	10
		277	22	0.09	0.93	<1.7	0.90	4.09	15
CFS16W/GR10q	2	120	39	0.33	0.98	<1.7	1.00	2.56	12
		277	38	0.14	0.97	<1.7	1.00	2.63	12
	1	120	21	0.18	0.98	<1.7	1.10	5.24	12
		277	21	0.08	0.92	<1.7	1.10	5.24	15
CFQ26W/G24q	1	120	24	0.20	0.99	<1.7	1.00	4.17	10
		277	24	0.09	0.94	<1.7	1.00	4.17	15
CFTR26W/GX24q	1	120	24	0.20	0.99	<1.7	1.00	4.17	10
		277	24	0.09	0.94	<1.7	1.00	4.17	15

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: -20°F, -28°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non-consumer Limits
- UL "HL" rated for hazardous locations
- 3-Year Warranty
- UL, cUL 935 Listed, Class P, Type 1 Outdoor
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- RoHS Compliance

PHYSICAL DIMENSIONS:



Length (L): 4.34"
Width (W): 2.40"
Height (H): 1.00"
Mounting (M1): 2.00"
Mounting (M2): 4.63"

Options: also available versions

- without studs
- with lead wires



WIRING DIAGRAM:

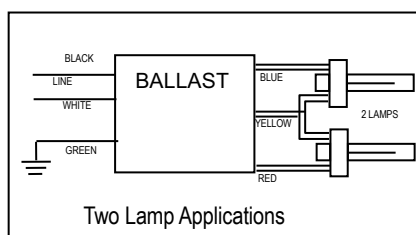

HOT SPOT LOCATION:

