



## New GS-1930 SCISSOR LIFT



Max. Working Height  
**25 ft.**

Capacity  
**500 lbs.**

Machine Width      Machine Length      Weight  
**2 ft. 6 in.**            **6 ft.**            **3,302 lbs**

**\$11,875**



The Genie® GS™-1930 slab scissor lift is easy to maneuver in tight spaces, has a 25-ft working height, boasts quiet electric, zero-emissions operation and is ideal for indoor and outdoor applications on firm, level surfaces.

- Large platform workspace with 36-in (.9 m) roll-out platform extension
- Front-wheel drive and zero inside turning radius
- Multiple disc brakes provide smooth deceleration
- Drive speed interlock limits speed while elevated

# Self-Propelled Scissor Lifts

## GS™ -1530 & GS-1930

### Specifications

Models	GS-1530		GS-1930	
Measurements	US	Metric	US	Metric
Working height maximum <sup>1</sup>	21 ft	6.57 m	25 ft	7.79 m
▲ Platform height maximum	15 ft	4.57 m	19 ft	5.79 m
▲ Platform height stowed	3 ft 2 in	.97 m	3 ft 4 in	1.00 m
▲ Platform length - outside extended	5 ft 4 in	1.63 m	5 ft 4 in	1.63 m
Slide-out platform extension deck	3 ft	0.91 m	3 ft	0.91 m
▲ Platform width - outside	2 ft 5 in	0.74 m	2 ft 5 in	0.74 m
Guardrail height: fixed rails folding rails	3 ft 3 in	0.99 m	3 ft 3 in	0.99 m
	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m
Toeboard height	6 in	0.15 m	6 in	0.15 m
▲ Height-stowed: fixed rails folding rails rails folded	6 ft 5 in	1.96 m	6 ft 7 in	2.00 m
	6 ft 9 in	2.03 m	6 ft 11 in	2.11 m
	5 ft 8 in	1.73 m	5 ft 9 in	1.75 m
▲ Length-stowed	6 ft	1.83 m	6 ft	1.83 m
Length-stowed extended	8 ft 11 in	2.74 m	8 ft 11 in	2.74 m
▲ Width	2 ft 6 in	0.76 m	2 ft 6 in	0.76 m
▲ Wheelbase	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m
▲ Ground clearance-center - with pothole guards deployed	2.4 in	6 cm	2.4 in	6 cm
	0.75 in	2 cm	0.75 in	2 cm

### Productivity

Maximum platform occupancy	2	2
Lift capacity	600 lbs	272 kg
Lift capacity - extension deck	250 lbs	113 kg
Drive height	full height	full height
Drive speed - stowed	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed <sup>2</sup>	30%	25%
Turning radius - inside	zero	zero
Turning radius - outside	5 ft 1 in	1.55 m
Raise / lower speed	16 / 22 sec	16 / 22 sec
Controls	proportional	proportional
Drive	dual front wheel	dual front wheel
Multiple disc brakes	dual rear wheel	dual rear wheel
Tires - solid non-marking	12 x 4.5 in	30.5 x 11.5 cm
	12 x 4.5 in	30.5 x 11.5 cm

### Power

Power source	24 V DC (four 6 V 225 Ah batteries)	
Hydraulic system capacity	3.8 gal	14.2 L

3.8 gal	14.2 L
---------	--------

### Weight<sup>3</sup> / Floor Loading<sup>4</sup>

Weight - ANSI, CSA	2,575 lbs	1,168 kg	3,302 lbs	1,226 kg
Tire load, maximum	1,175 lb	533 kg	1,302 lb	591 kg
Tire contact pressure	131 psi	900 kPa	145 psi	998 kPa
Occupied floor pressure	238 psf	11.40 kPa	254 psf	11.50 kPa

### Standards Compliance


ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

<sup>1</sup> The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

<sup>2</sup> Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings.

<sup>3</sup> Weight will vary depending on options and/or country standards.

<sup>4</sup> Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

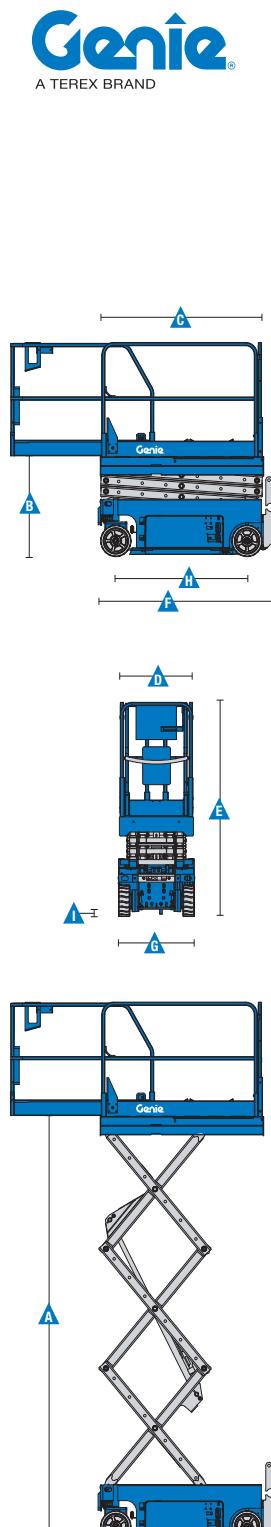

**ABLE**  
EQUIPMENT RENTAL

ableequipment.com  
(866) 468-2666

[www.genielift.com](http://www.genielift.com)