

## 2632R ELECTRIC SCISSORS



### Performance

Platform Height-Elevated (indoor / outdoor)  
2632R 25 ft 6 in. / 19 ft 7.8 m / 5.8 m

Platform Capacity (indoor / outdoor)  
2632R 507 lb / 275 lb 230 kg / 125 kg

Capacity on Platform Extension  
2632R 265 lb 120 kg

Lift/Lower Time  
2632R 56/42 seconds

Maximum Drive Height  
2632R Fully Elevated

Weight\*  
2632R 4,310 lb 1,955 kg

Ground Bearing Pressure  
2632R 92 psi 6.2 kg/cm<sup>2</sup>

Drive Speed-Elevated  
Drive Speed-Lowered  
2632R 0.5 mph 0.8 km/h  
2.0 mph 3.2 km/h

Gradeability  
Turning Radius (Inside)  
Turning Radius (Outside)  
2632R 25% 0 0  
88 in. 2.2 m

\* Certain options or country standards will increase weight.

### Standard Specifications

#### Power Source

Batteries  
2632R 4 x 6V 220 amp-hr

Charger  
Drive  
Hydraulic Front-Wheel

#### Hydraulic Reservoir

• Capacity (at Full mark)  
2632R 4 gal. 15 L

• Pump Fixed Displacement Gear

#### Tires

• Tire Size/Type (Non-Marking)  
2632R 16 x 5 in. 406 x 127 mm

#### Brakes

• Multi-Disc Friction



### Standard Features

- Proportional Controls
- Battery Condition Indicator
- AC Receptacle in Platform
- All Motion Alarm
- 27 amp Multi-Function Universal Charger
- Horn
- Hourmeter
- Tilt Alarm and Light
- Lanyard Attach Points
- Movable, Removable Platform Control
- Nickel Plated Pins
- Lubrication Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Active Pothole Protection System
- Lifting and Tie Down Points
- Fork Lift Pockets
- Foot-Actuated Deck Extension
- Steel Swing-Out Doors
- Variable Tilt Visual Zone Indicator
- Manual Descent Cable
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Analyzer Port for Diagnostics
- Dynamic Braking
- Removable Ladder
- ANSI 92.20 Compliant

### Accessories & Options

- Coiled Platform Control Box Cable
- Drive Motor Covers
- Extension Deployment Handles
- Fire Extinguisher
- Flashing Amber Beacon
- MDI (Ground)
- Anti-Vandalism PKG
- Eagle Performance Charger
- 900W Inverter
- Ambient Noise Alarm
- Batteries, AGM (6V, 220AH) - 2632R
- Batteries (6V, 220AH) - 2632R
- Batteries (6V, 250) - 2632R

**In Stock**

**JLG 2632R  
Electric Scissors  
was \$15,895**


**Now \$15,250**

# 2632R ELECTRIC SCISSORS

**JLG**  
reaching out®

## Dimensions

All dimensions are approximate.

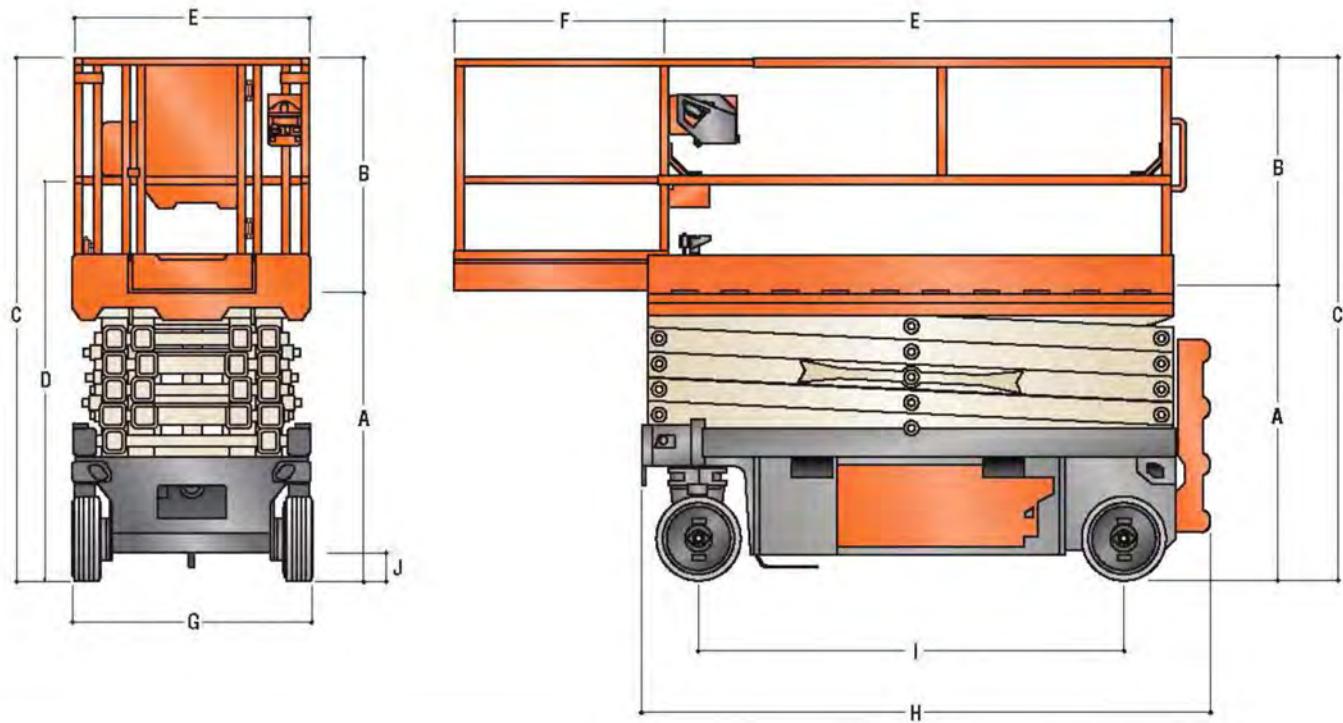

A. Platform Height – Lowered 2632R	43.6 in. 1.1 m	F. Platform Extension 2632R	34.0 in. 86.5 cm
B. Platform Railing Height 2632R	44.6 in. 1.1 m	G. Overall Width 2632R	32.0 in. 81.0 cm
C. Overall Height 2632R	88.2 in. 2.2 m	H. Overall Length 2632R	94.3 in. 2.4 m
D. Overall Height (Rails Lowered) 2632R	69.7 in. 1.8 m	I. Wheelbase 2632R	74.0 in. 1.9 m
E. Platform Size 2632R	25.4 in. x 84.0 in. 0.7 m x 2.1 m	J. Ground Clearance (Pothole Protection Not Deployed) 2632R	3.9 in. 9.8 cm

### The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

### JLG Industries, Inc.

1JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Com

**ABLE**  
**EQUIPMENT RENTAL**  
[ableequipment.com](http://ableequipment.com)  
(866) 468-2666