



In Stock

**SJ3219
Electric Scissors
was \$11,495**

Now \$10,850



STANDARD FEATURES

- Drivable at full height
- Variable speed, front two wheel hydraulic drive
- 90° Steering (zero inside turning radius)
- Dual holding brakes
- SKYCODED™ Color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- Tilt sensor (3.5° x 1.5°)
- 3' (0.91 m) Roll out extension deck
- 24V DC Power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC Outlet on platform with GFI
- 28 mph (12.5 m/s) Wind rating
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down / lift luas

OPTIONS


- Light duty pipe rack
- Heavy duty pipe rack
- Board carrier
- Tool caddy
- Flashing light
- Dual flashing lights
- 800W AC Inverter
- 250 Ah Batteries (cannot be combined with EE rating package)
- AGM Batteries
- Lockable swingout trays
- EE Rating package (not available with telematics keypad)
- Full height spring hinged entry gate
- Bio oil
- Secondary Guarding Lift Enable (SGLE)
- Non-destructive testing
- ELEVATE telematics (3-year or 5-year plans available)
- ELEVATE Battery Management System (BMS) *
- Warranty options (3-year or 5-year plans available)

† Standard lead times may be increased when optional equipment is added, consult factory.
‡ Capacities and machine weights may differ when options are added.

* Only available with ELEVATE telematics

SJ3219 ELECTRIC SCISSORS

Dimensions		SJ3219
A Work Height		24' 6" (7.48 m)
B Raised Platform Height		18' 6" (5.64 m)
C Lowered Platform Height		41" (1.04 m)
D Overall Width		32" (0.81 m)
E Overall Length		71" (1.80 m)
F Stowed Height (Rails Up)		84" (2.13 m)
G Stowed Height (Rails Down)		70" (1.78 m)
H Platform Width (Inside Dimension)		26" (0.66 m)
I Platform Length (Inside Dimension)		61" (1.55 m)
Specifications		SJ3219
Extension Deck (Roll Out)		3' (0.91 m)
Ground Clearance (Pothole Raised)		3.5" (8.9 cm)
Ground Clearance (Pothole Deployed)		0.5" (1.3 cm)
Wheelbase		54" (1.37 m)
Weight		3,255 lbs (1,476 kg)
Gradeability		25%
Turning Radius (Inside)		0
Turning Radius (Outside)		65" (1.65 m)
Lift Time (With Rated Load)		19 sec
Lower time (With Rated Load)		25 sec
Drive Speed (Stowed)		2.1 mph (3.4 km/h)
Drive Speed (Raised)		0.7 mph (1.1 km/h)
Maximum Drive Height		Full Height
Capacity (Overall)		500 lbs (227 kg)
Distributed Capacity (Main Platform)		250 lbs (113 kg)
Distributed Capacity (Extension Deck)		250 lbs (113 kg)
Local Floor Load (With Rated Load)		168 psi (1,159 kPa)
Overall Floor Load (With Rated Load)		243 psf (1,188 kg/m ²)
Maximum # of persons at 0 mph (0 m/s) wind rating		2
Maximum # of persons up to 28 mph (12.5 m/s) wind rating		1
Tire Type		Solid, N/M
Tire Size		12 x 4 x 8

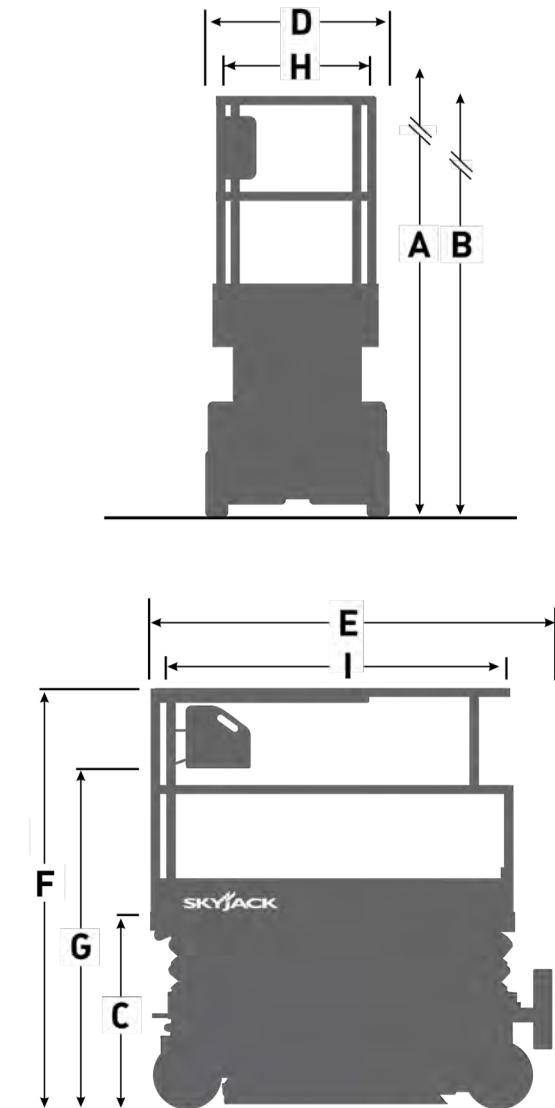

Skyjack Head Office
 55 Campbell Rd. Guelph, ON Canada N1H 1B9
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
 Main Switchboard: 1-800-265-2738
 Phone: 519-837-0888
 Fax: 519-837-8104
 Email: skyjack@skyjack.com

www.skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. Work platforms have been tested to comply with ANSI and CSA standards as interpreted by Skyjack Inc.

ABLE
EQUIPMENT RENTAL
ableequipment.com
 (866) 468-2666

SKYJACK
 simply reliable