800.775.2362 | www.cemcosteel.com
Structural Engineering/Design: 925.473.9340
Technical Services: 800.416.2278

SUPER SEAL-X (FIRE RATED DEFLECTION BEAD)

Product Description

CEMCO SUPER SEAL-X is a surface mounted deflection bead tested to UL 2079. It provides 1 & 2 hour firestop solutions in vertical joints for both standard wall and shaft wall types between dissimilar material applications.

- Tested over vertical window aluminum mullions WW-D-0182.
- Tested with up to 50% compression.
- Installs fully cured, unaffected by water/moisture/temperature.
- Available in all black and pink vinyl with white bubble gasket.
- Combines a vinyl bubble gasket, a perforated mud leg and intumescent strip to provide an aesthetically pleasing joint when in an exposed location.
- Provides a single step installation of both a code compliant firestop and finished drywall accessory in a single component.
- Installs on the face of the drywall with a perforated mud leg incorporated to accept joint compound.
- Easily installs using spray adhesive and staples.
- Remains flexible for the life of the assembly.
- Can be used in top-of-wall, bottom-of-wall and vertical joints.
- Provides Sound Transmission Classification (STC) rating.
- Paintable.

Ordering / Packaging

Description	Part #	Size	Length	Pcs/Ctn
SUPER SEAL-X (Pink)	SSX	3/8" x 1-1/8"	10'	25
SUPER SEAL-X (Black)	SSXB	3/8" x 1-1/8"	10'	25


Submitted for Review/Use	✓
SSX	
SSXB	

Storage / Warranty

- When stored indoors and kept dry in the original package, Super Seal-X will provide unlimited shelf life.
- Sustainable Building Life-Cycle Warranty – see CEMCO Firestop Product Warranty for details.

ASTM & Code Standards

- ASTM E-84
- ASTM E-90
- ASTM E-119
- ASTM E-1966
- UL 263
- UL 723
- UL 2079 5th Edition
- UL ER25033-01
- L-Rating (air leakage) testing for compliance with International Building Code (IBC) and Canadian Building Code (CBC).
- UL listings/approvals include: BW-S-0024; HW-D-0550, HW-D-0554; HW-D-0624; HW-S-0128; WW-D-0104; WW-D-0172; WW-D-0182
- **U.S. Patent No. 11,111,666; 11,873,636**

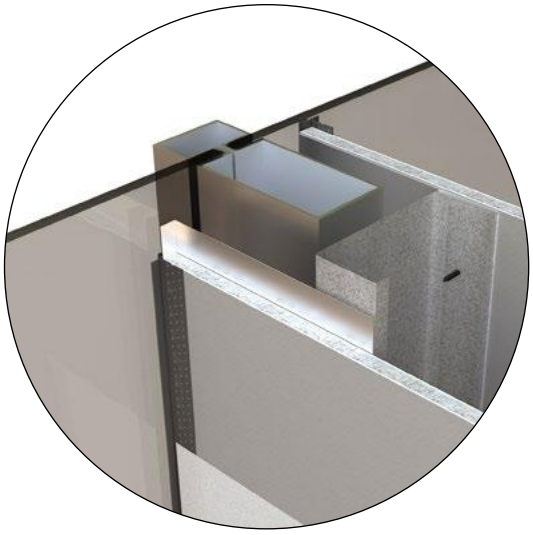


Please refer to www.cemcosteel.com for UL Fire Rated Assemblies and Sound Test Reports.


This technical information reflects the most current information available and supersedes any and all previous publications effective March 22, 2024.
03-22-24 AT

800.775.2362 | www.cemcosteel.com
Structural Engineering/Design: 925.473.9340
Technical Services: 800.416.2278


SUPER SEAL-X (FIRE RATED DEFLECTION BEAD)




SSX




SSXB

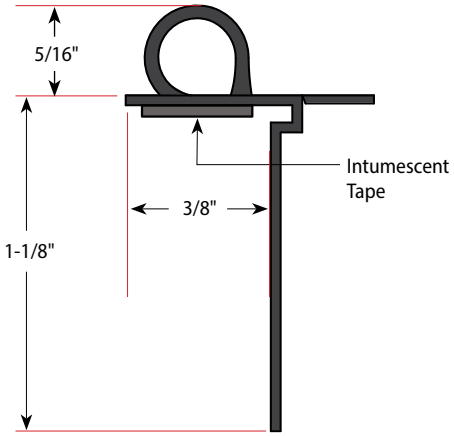

← **View the installation video!**

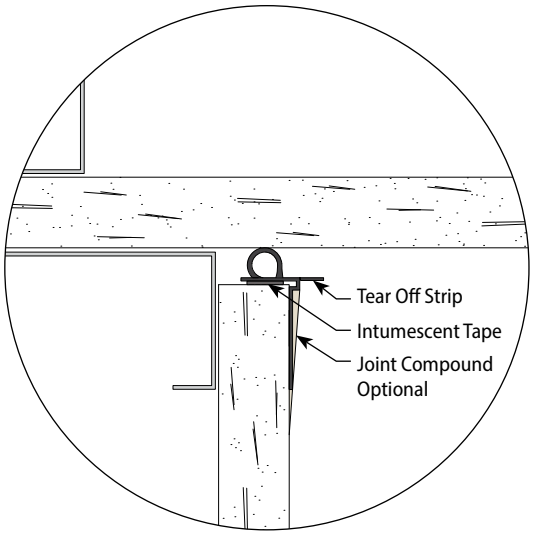

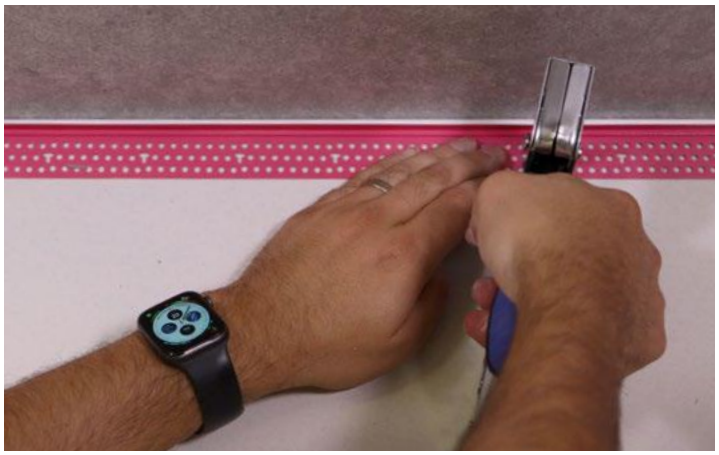



Please refer to www.cemcosteel.com for UL Fire Rated Assemblies and Sound Test Reports.

USGBC MEMBER

SFIA STEEL FRAMING INDUSTRY ASSOCIATION

IFC MEMBER

This technical information reflects the most current information available and supersedes any and all previous publications effective March 22, 2024.
03-22-24 AT