
Pioneering for You

Scot Marine Product Guide


Pumps and systems for yachts and workboats.



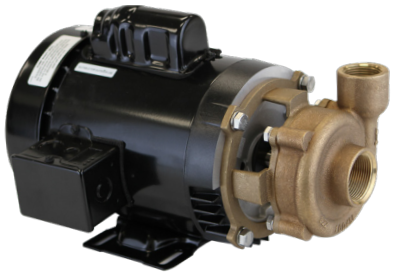

Marine Straight Centrifugal Pumps

35000 Series

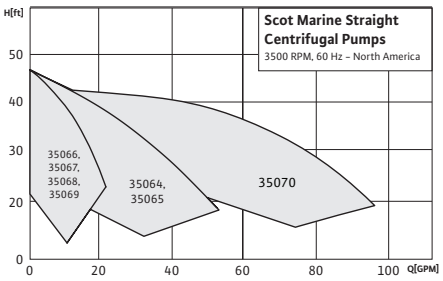

Application

→ Air Conditioning
→ Refrigeration
→ Cooling Water Circulation

Max. Flow

90 GPM

Max. Head

48 feet

Features & Benefits


→ Heavy Duty Cast Construction
→ Close Coupled–Back Pullout Design
→ Enclosed & Semi–Open Impeller
→ Continuous Duty Motor

Technical Data

→ NEMA 50/60HZ Motors
→ TEFC Motor is Standard
→ NPT Connections


Materials of Construction

→ Marine Bronze Case, Impeller and Adapter

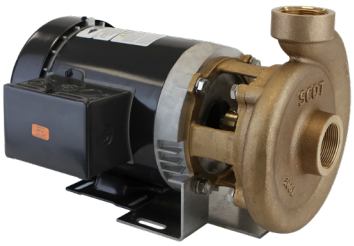

Marine Straight Centrifugal Pumps

48000 Series

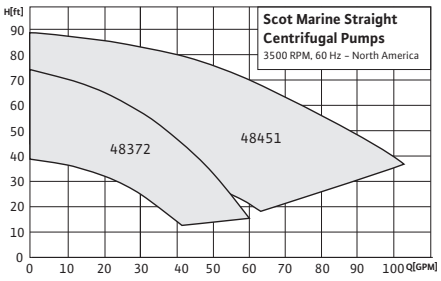

Application

→ Air Conditioning
→ Refrigeration
→ Cooling Water Circulation

Max. Flow

110 GPM

Max. Head

90 feet

Features & Benefits

→ Heavy Duty Cast Construction
→ Close Coupled–Back Pullout Design
→ Semi–Open Impeller
→ Continuous Duty Motor

Technical Data

→ NEMA 50/60HZ Motors
→ TEFC Motor is Standard
→ NPT Connections


Materials of Construction

→ Marine Bronze Case, Impeller and Adapter



Marine Straight Centrifugal Pumps

57000 Series

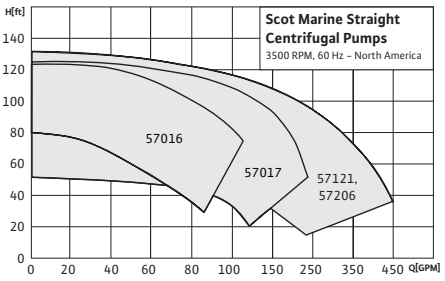

Application

→ Air Conditioning
→ Refrigeration
→ Chilled Water Circulation

Max. Flow

400 GPM

Max. Head

130 feet

Features & Benefits

→ Heavy Duty Cast Construction
→ Close Coupled–Back Pullout Design
→ Enclosed & Semi–Open Impeller
→ Continuous Duty Motor

Technical Data

→ NEMA 50/60HZ Motors
→ TEFC Motor is Standard
→ NPT Connections


Materials of Construction

→ Marine Bronze Case, Impeller and Adapter



Marine Sewage & Wastewater Centrifugal Pumps

48382 Series

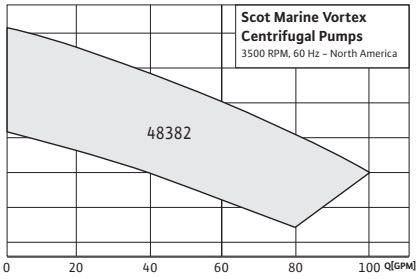

Application

→ Sewage Transfer
→ Wastewater

Max. Flow

100 GPM

Max. Head

50 feet

Features & Benefits

→ Heavy Duty Cast Construction
→ Close Coupled–Back Pullout Design
→ Vortex Impeller
→ Continuous Duty Motor

Technical Data

→ NEMA 50/60HZ Motors
→ TEFC Motor is Standard
→ 2" NPT Connections


Materials of Construction

→ Marine Bronze Case, Impeller and Adapter



Marine Self–Priming Centrifugal Pumps

48000 and 68000 Series

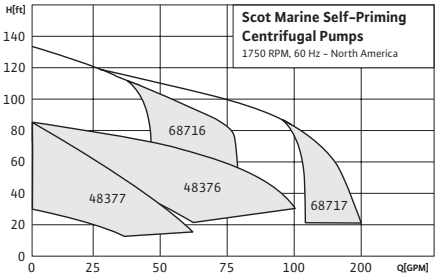

Application

→ Raw Water Intake
→ Air Conditioning
→ Refrigeration
→ Bilge/Ballast
→ Fire Fighting/Washdown

Max. Flow

200 GPM

Max. Head

100 feet

Features & Benefits

→ Heavy Duty Cast Construction
→ Close Coupled–Back Pullout Design
→ Enclosed & Semi–Open Impeller
→ Self–Priming up to 20' lift
→ Continuous Duty Motor

Technical Data

→ NEMA 50/60HZ Motors
→ TEFC Motor is Standard
→ NPT Connections

Materials of Construction

→ Marine Bronze Case, Impeller and Adapter



Marine Vented Loops

20913 Series

Models and Sizes
Vented Loop with Vaccum Breaker

Loop Model No.	Size-D	Wt. (Lbs.)	Includes Vacuum Breaker Item
20913-VL-05	1/2	0.05	20913-VB-18F
20913-VL-06	5/8	0.06	20913-VB-18F
20913-VL-07	3/4	0.07	20913-VB-18F
20913-VL-09*	7/8	1.00	20913-VB-18F
20913-VL-10	1	1.10	20913-VB-18F
20913-VL-11**	1-1/8	1.20	20913-VB-38
20913-VL-15	1-1/2	1.30	20913-VB-38
20913-VL-20	2	1.70	20913-VB-38

*Same as 1/2" pipe O.D.
**Fits rule bilge pump hose

Application

→ Head Flushing Discharge Line
→ Engine Wet Exhaust Line
→ Bilge Pump Out Line

Features & Benefits

→ Stops Back Siphonage
→ Sizes 1/2"–2"
→ SAE Hose Barb Connection

Technical Data

→ Delrin Vacuum Breaker Included
→ Corrosion Proof Construction

Materials of Construction

→ 316 Stainless Steel

Ask us about our DC motor pump options!

wilo®

MPG-001-0926

Scot Pump Marine
3001 SW 3rd Ave, Ste 6
Fort Lauderdale, FL 33315

Scot Pump
W66 N1253 Forward Way
Cedarburg, WI 53012

+1 954-524-6776
www.scotpump.com
scot.marine@wilo.com

Pioneering for You