

Pioneering for You


wilo



Sewage transport

Wilo-Rexa NORM

Economical sewage transport in dry well installation

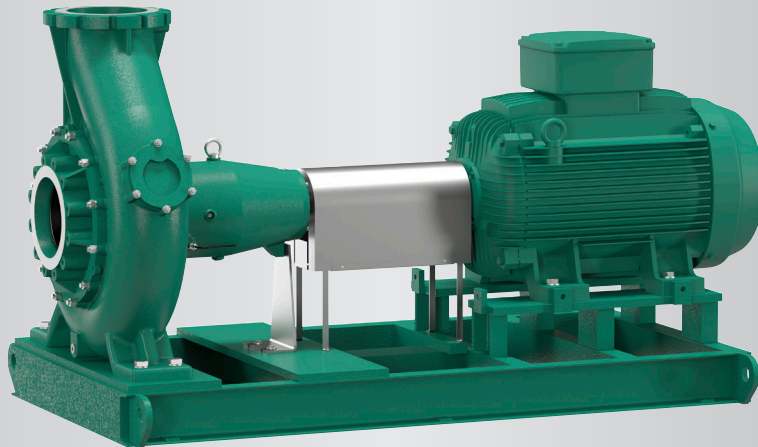

Wilo-Rexa NORM.

Economical pumping. Thanks to efficient motors and proven hydraulics.

Intermediate pumping stations, collector pumping stations and wastewater treatment plants are increasingly affected by the fact that the construction or renovation of sewage disposal systems is subject to a large number of standards, laws and individual requirements. Increasing urbanization and growing metropolitan areas call for more modern sewage systems with wider coverage and greater capacity. At the same time, consumers become increasingly frugal in their consumption of the precious resource water and many opt for water-saving systems or rainwater utilization when faced with increasing charges for the supply of drinking water and the disposal of sewage.

As a result, less water is fed into the sewage network, the proportion of solid contents increases and the pumping operation is aggravated.

Versatile solutions by Wilo.


Wilo offers you a reliable sewage disposal solution with modern products for stationary dry well installation: the horizontal sewage pump Wilo-Rexa NORM with a coupled NEMA motor – offered as a complete unit mounted on a baseplate.

Thanks to the premium efficiency class, our standard motors operate with outstanding efficiency, including on continuous duty. Reliable sewage pumping operation is technically ensured by proven hydraulics with a vortex or a single-channel impeller.



YOUR ADVANTAGES:

- High operational reliability thanks to closed bearing brackets with oil-filled sealing chamber, additional leakage chamber and two mechanical seals
- Low energy costs due to high overall efficiency
- Long service life when pumping abrasive and corrosive fluids thanks to various Ceram coatings
- Low operating costs thanks to a service-friendly and time-saving construction with back pull-out design
- Offers high flexibility for local space availability thanks to horizontal or vertical installation

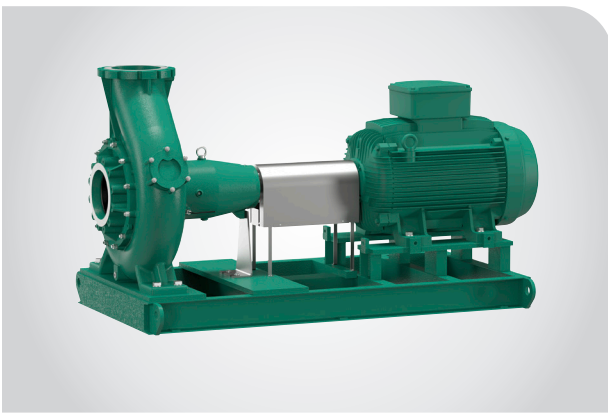


Wilo-Rexa NORM

Sewage pump with NEMA motor. Connected via coupling. Complete mounting on a baseplate, with low-clogging and energy efficient impellers to enable reliable and flood-proof sewage transport.

Your optional features:

- NEMA motors with premium efficiency as standard
- Seal on motor side by double mechanical seals
- Electrode for leakage monitoring of the sealing chamber
- Individual adjustment of the duty point by trimming of the impeller diameter
- Bare shaft model with baseplate
- Ability to adjust to inlet flows with Wilo-EFC (e.g. in case of heavy rain or minimal volume flows)

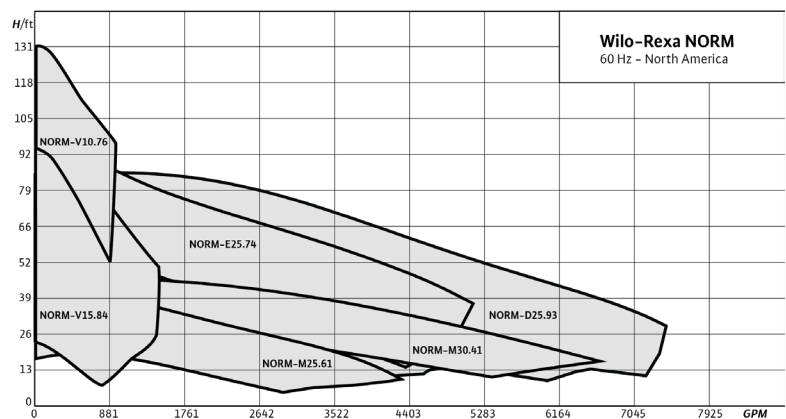

Application

- Untreated Sewage
- Process Water
- Wastewater

Max. Flow

7,920 GPM

Max. Head

131 feet

Lower operating costs and simplify maintenance work:



The back pull-out design allows for easy disassembly of the motor and impeller as whole units, without the need to extract the hydraulics from the pipe.

Pioneering for You

wilo

WILO USA
W66 N1253 Forward Way
Cedarburg, WI 53012
www.wilo-usa.com

Subject to technical changes without prior notice.