

Hydraulic Piloted Directional Control Valve

Screw-in cartridge, 2 position, 4 way, spool type, direct acting


HPK16A/R/X

5000 psi, 40 gpm


Features and Benefits

- Available for size 16 valve cavities
- Designed for high pressure bi-directional flow
- Hardened body and spool for maximum service life
- Internal leakage less than 100cc/min @ 3000 psi
- Multiple preload pressure settings enhance circuit design options
- Outstanding operating limits eliminates need for pressure reducing valves at the pilot ports



HPK16A




HPK16R




HPK16X

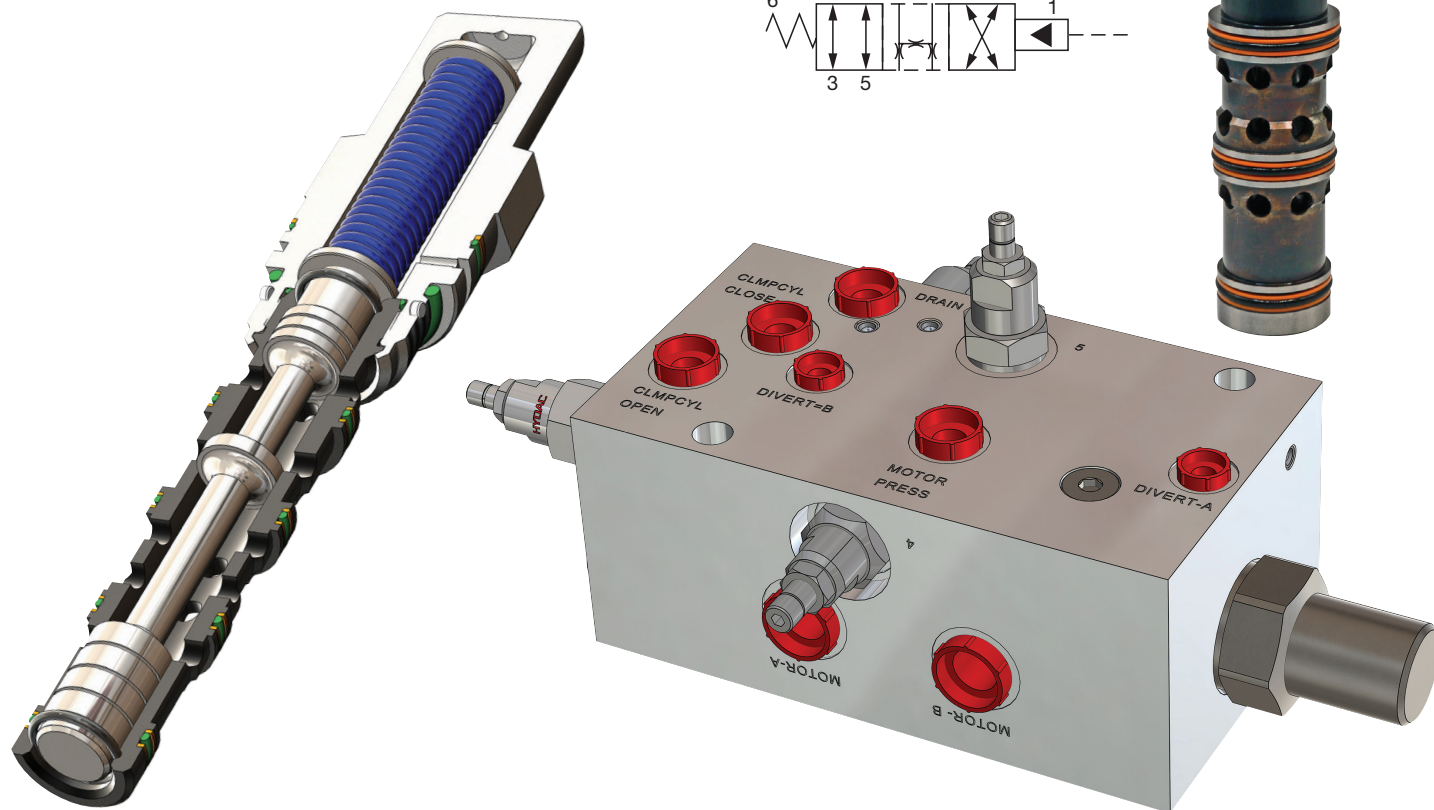


Pressure Drop HPK16A

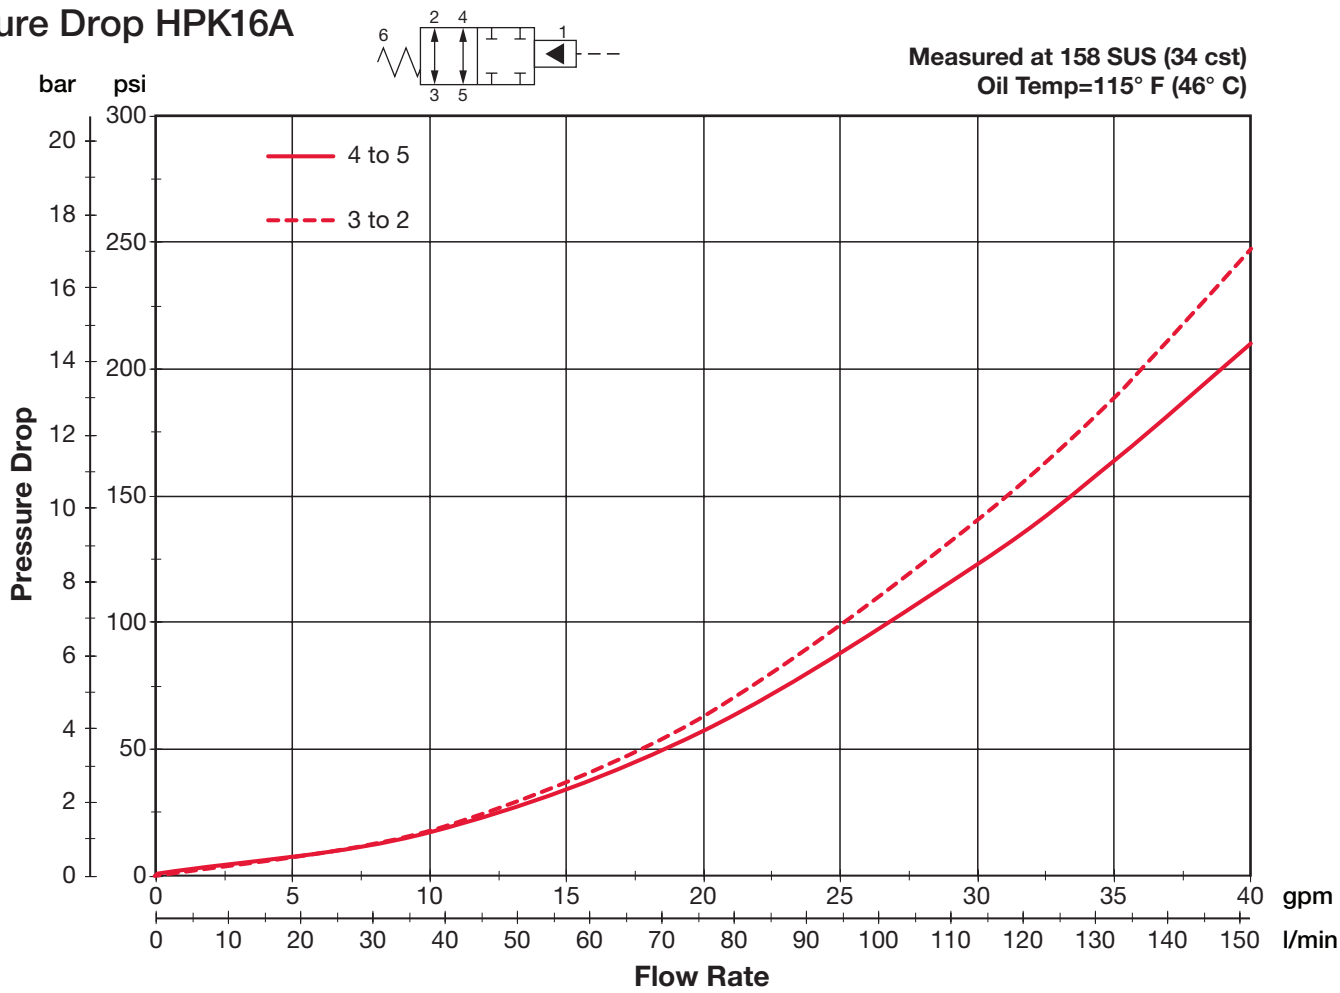


Pilot Pressure HPK16A

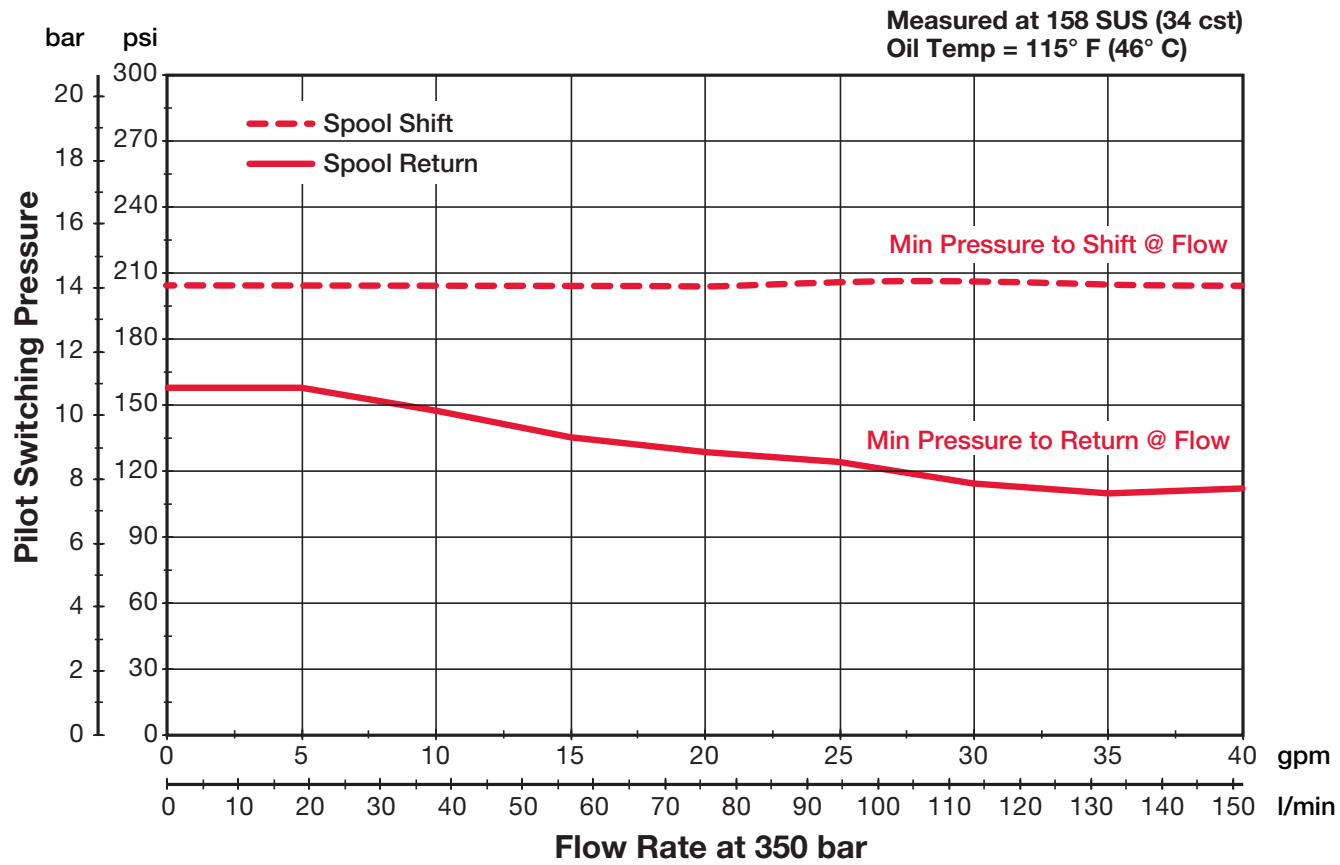


Pressure Drop HPK16R

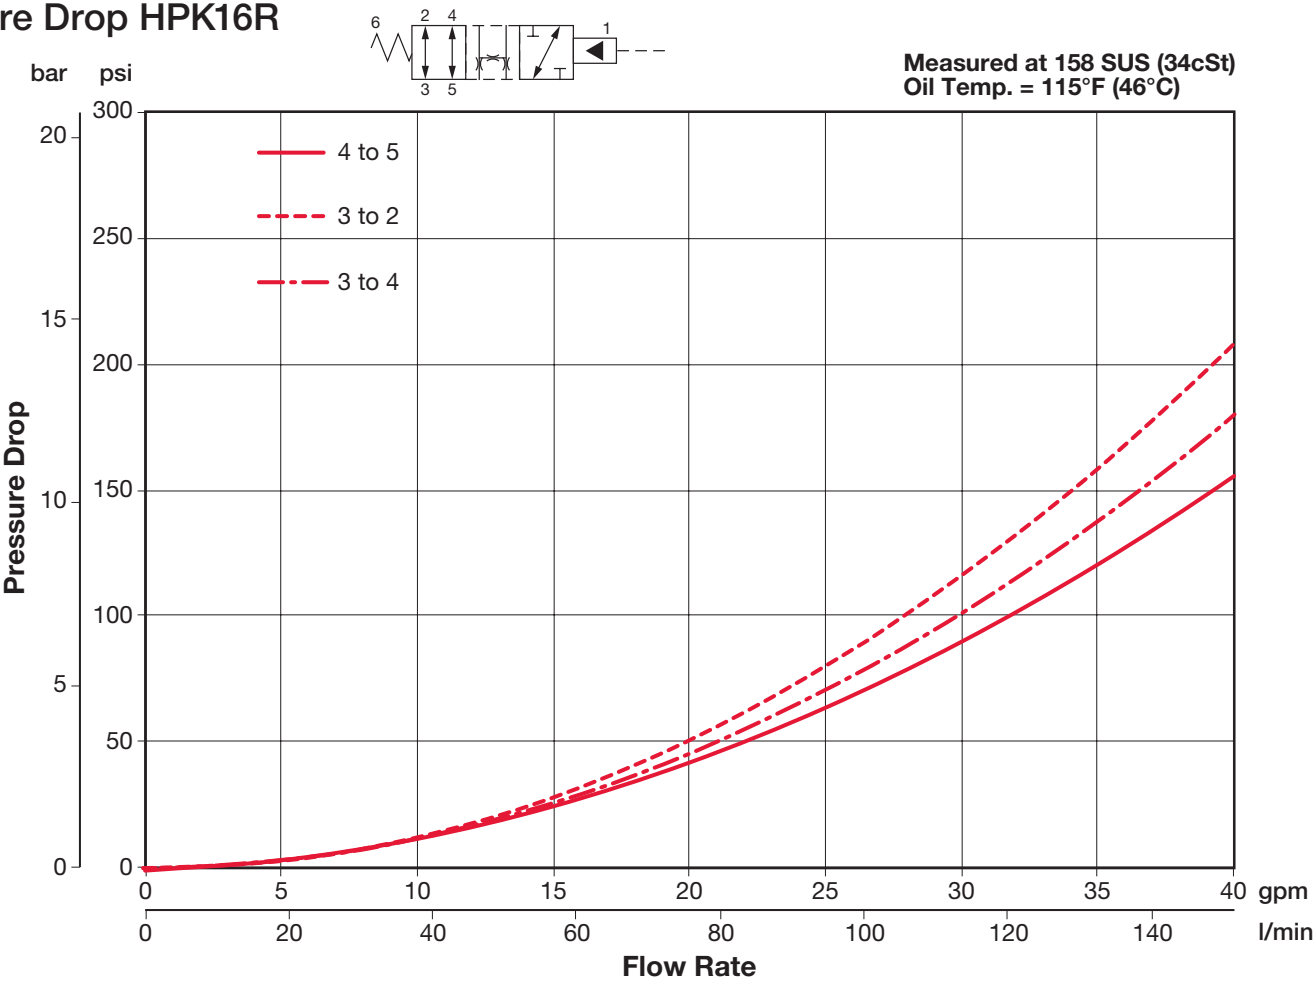

Pilot Pressure HPK16R

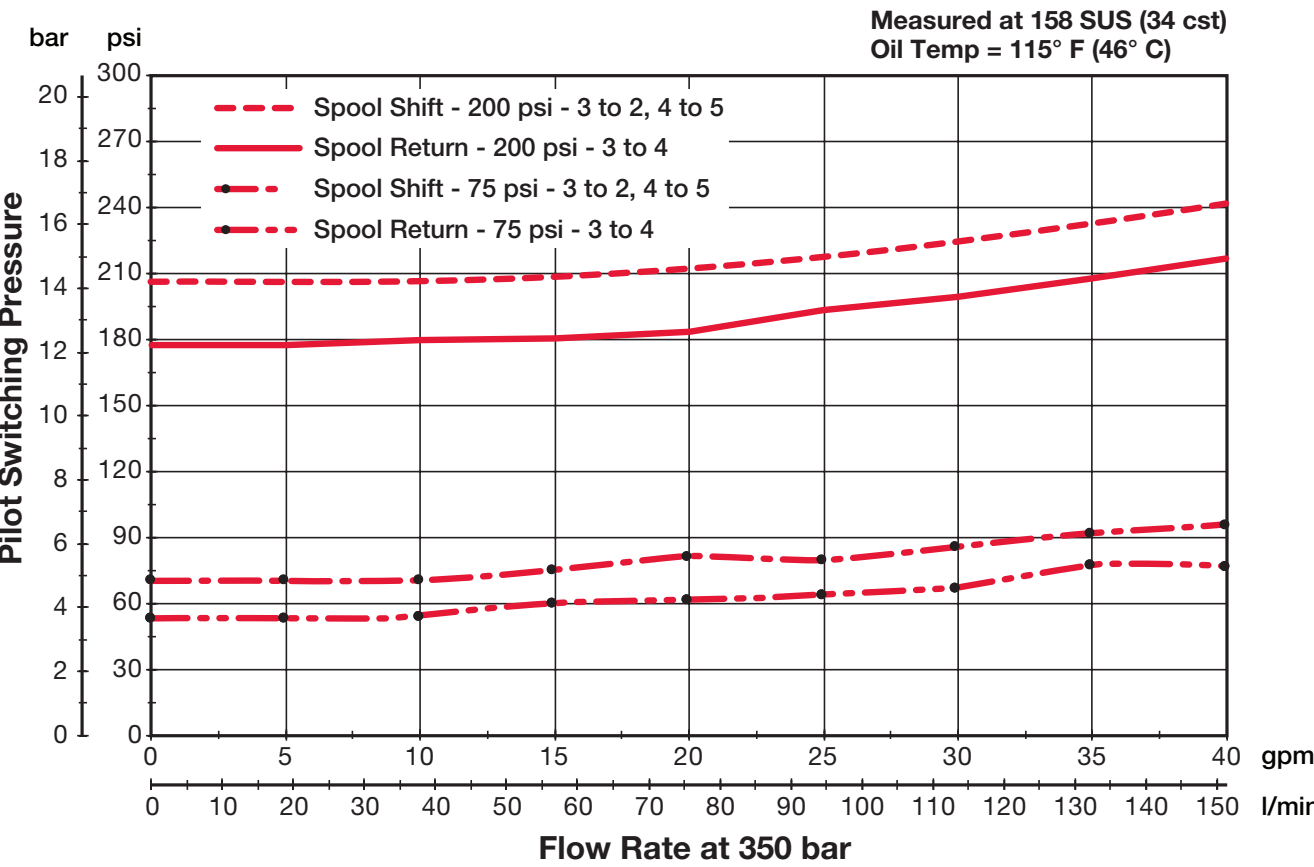

Pressure Drop HPK16X

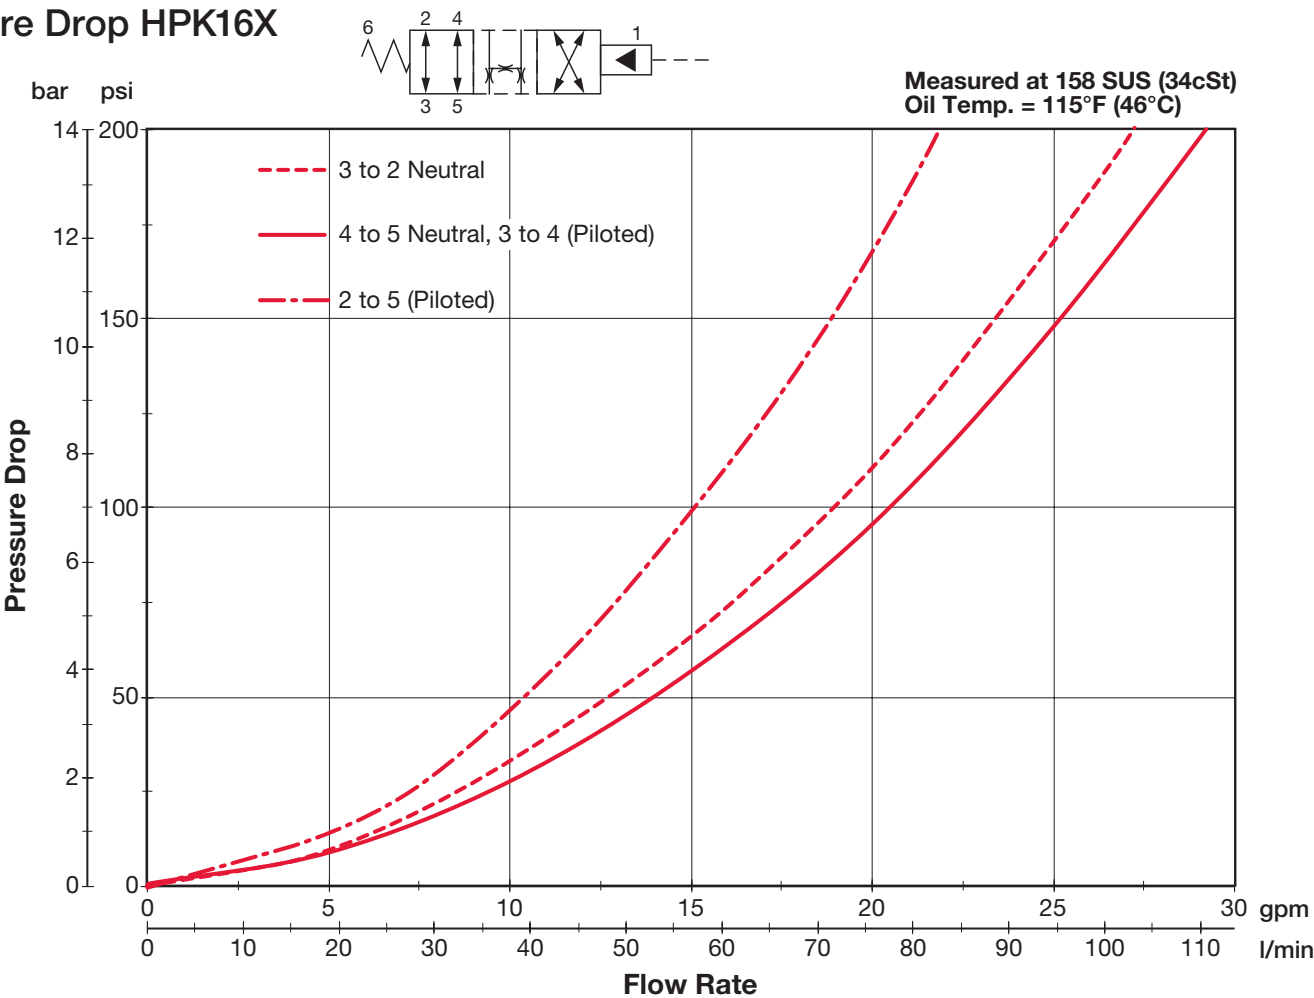

Pilot Pressure HPK16X

