

Hydraulic Piloted Directional Control Valve

Screw-in cartridge, 2 position, 3 way, spool type, direct acting


HPK16SE/SF

5000 psi, 40 gpm


Features and Benefits

- Available for size 16 valve cavities
- Minimal height requirements above mounting surface
- Hardened body and spool for maximum service life
- Innovative damping features to extend fatigue life
- Internal leakage less than 100cc/min @ 3000psi
- Suitable for various hydraulic functions, including flow regulation, pressure compensation and directional control



Application Example: Priority Flow Control

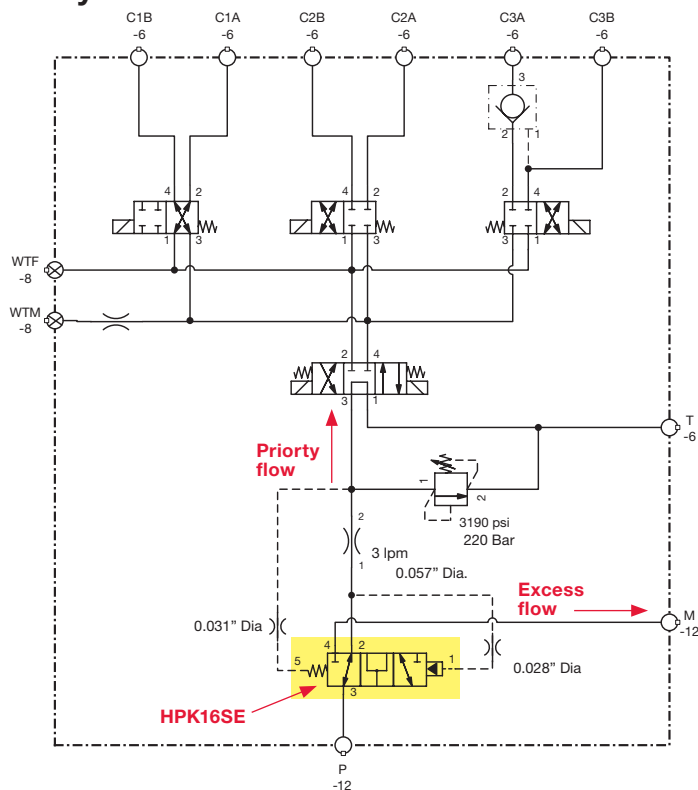


HPK16SE

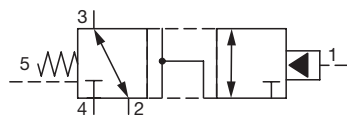

HPK16SF

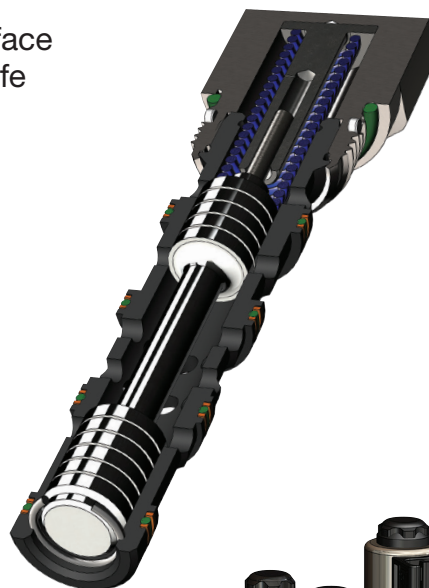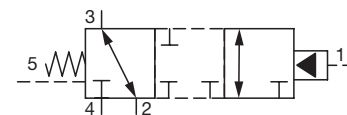

Pressure Drop HPK16SE/SF

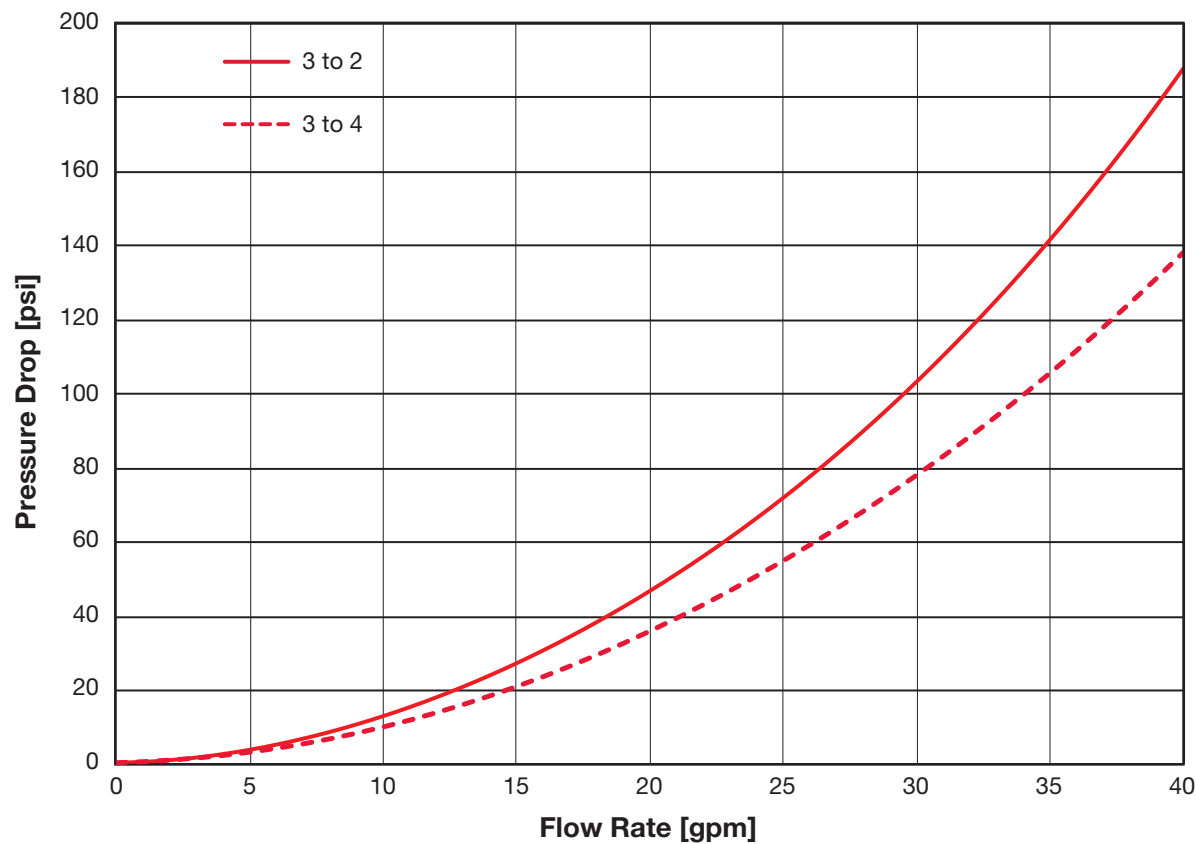

Flow Regulation HPK16SE

