


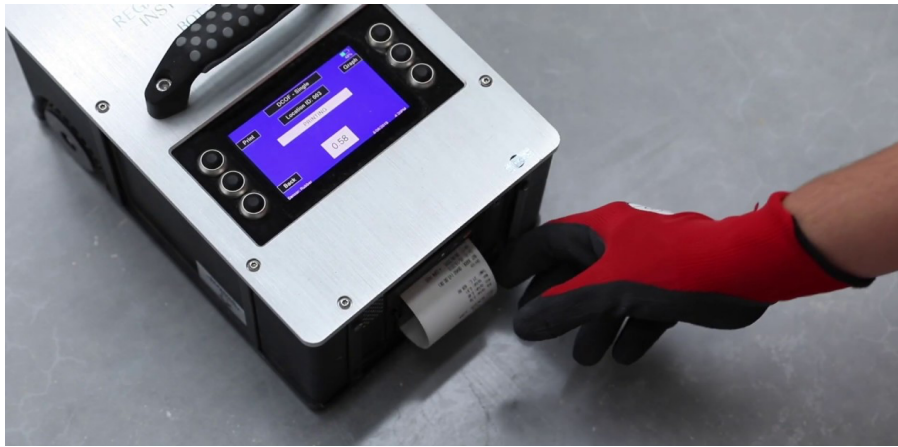

BOT-3000E

Slip and Fall Testing

Facts and Features of the BOT 3000-E:

- Used worldwide and is fast becoming the industry standard.
- Portable and convenient to bring to any incident location. Easy setup for testing.
- Very few moving parts to manipulate. Push button operation.
- Measures both wet and dry Dynamic Coefficient of Friction (DCOF) and Static Coefficient of Friction (SCOF).
- Compliant with ANSI A326.3 & A137.1.
- Critical for OSHA compliance of the General Duty Clause to reduce slip and falls.
- Used for flooring COF criteria in construction specifications.
- Meets all Five (5) Factors for successfully defending a Daubert Challenge.
- Typical Types of Flooring Tested:
 - Marble
 - Granite
 - Limestone
 - Ceramic and Porcelain floor tiles
 - Terrazzo flooring (epoxy and cement based)
 - Polished concrete flooring (industrial and decorative)
 - Engineered stone tiles
 - Quarry tile
 - VCT
 - LVT
 - Hardwood (manufactured and natural)



Provided By:
Mutual Engineering, Inc. - MEI
Richard A. Rice, PE SE CBO
Email: mutual@bellsouth.net
Mobile: 404.395.7441