SECURITY UL LISTED
UL 1034
UL 294

c UL us LISTED
UL10C/
CAN4-S104,
3hr. Fire rating

CX-EPD1289L
Surface Mount Preload RIM Strike



CX-EPD1289L



CX-EPD1289L-BK



EXCLUSIVE PRODUCTS

BEST QUALITY

Camden introduces the first surface mount RIM strike with preload in the security industry. The CX-EPD1289L grade 1 surface mount RIM strike, with latch monitoring, also offers a 'Universal' strike design that delivers unparalleled application flexibility, with both UL security and fire listings.

Preload is pressure exerted on the keeper of a strike that causes the mechanism to fail to release. Whether caused by air pressure, a misaligned door, or inexact installation, CX-EPD1289L RIM strikes are designed to operate where other strikes fail!

This award-winning strike is now available in a unique all-black finish, including the jaws and latch monitor.


Features

- 'No Cut' surface mount RIM strike for Pullman latches
- Operates with up to 15 lbs. of preload pressure
  - US Patent: 10988959
- 'Universal' design with selectable:
  - 12/24V, AC/DC operation
  - Fail Safe/Fail Secure operation
- 3/4" latch projection
- Latches operate independently of each other
- Metal mounting jig included for easy installation
- Available in stainless steel and unique all-black finish
- Heavy duty stainless steel construction
- Horizontal adjustment, spacer plate available
- Removable latch monitoring switch included
- Non-handed, left or right
- 5 year warranty

SPECIFICATIONS

Latch Projection:	3/4"
Voltage:	12/24V AC/DC
Current Draw:	560mA @12V DC 280mA @24V DC
Static Strength:	1,500 lbs. (UL Verified)
Dynamic Strength:	70 ft-lbs.
Preload:	15 lbs.
Endurance:	1,000,000 Cycles (Factory Tested) 250,000 Cycles (UL Verified)
Fire Rating:	UL10C/CAN4-S104 3hrs. (Fail Secure Mode Only)
Mode:	Field Selectable Fail Safe or Fail Secure
Operation:	AC Buzz, DC Silent
Duty:	Continuous
Latch Monitor:	SPDT, 100mA @ 24V DC, Resistive
Dimensions:	9-1/8"L x 1-7/8"W x 3/4"D (231.6mm x 48mm x 19.8mm)

DIMENSIONS

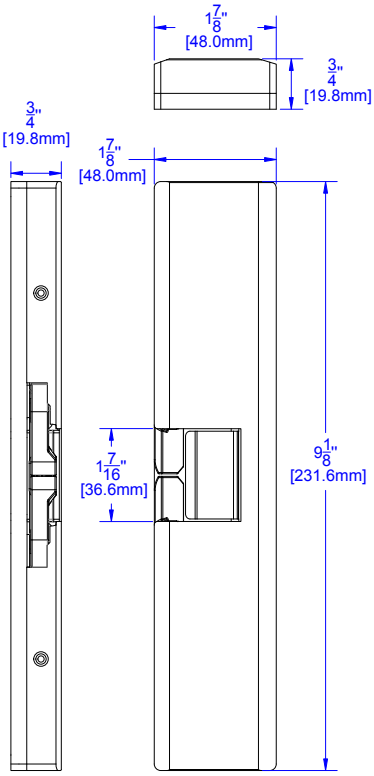

ORDERING INFORMATION

MODELS

CX-EPD1289L	Surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, c/w 'plug-in' latch monitor assembly and metal mounting jig.
CX-EPD1289L-BK	All-black finish, surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, c/w 'plug-in' latch monitor assembly and metal mounting jig.

SPACER PLATE

CX-EPD1289-SPC	Spacer plate for CX-EPD1289L surface mount RIM strike