

ELECTRONIC CALIPERS (STANDARD TYPE)



1108-150

DATA
OUTPUT

INSPECTION
CERTIFICATE
TRACEABLE TO NIST

Part No.	Range	Accuracy	Price (\$)
1108-150	0-6"/0-150mm	±.0010"	68.30
1108-200	0-8"/0-200mm	±.0015"	101.00
1108-300	0-12"/0-300mm	±.0015"	152.00

- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: data output cable (part no. 7315-21, 7302-21)

IP67 WATERPROOF ELECTRONIC CALIPERS

INSPECTION
CERTIFICATE
TRACEABLE TO NIST

IP67
WATERPROOF


ATTENTION: IT IS NECESSARY TO SET ZERO AFTER POWER ON EACH TIME

ATTENTION: NO
DATA OUTPUT

1118-150B

Part No.	Range	Accuracy	Price (\$)
1118-150B	0-6"/0-150mm	±.0015"	209.00
	0-8"/0-200mm	±.0015"	319.00
	0-12"/0-300mm	±.0015"	382.00

PISTOL GRIP THREE POINTS BORE GAGES

INSPECTION
CERTIFICATE

- Optional accessory: electronic indicators (part no. 2108-101EF, resolution .00005"/0.001mm), setting rings (part no. 6313)

Individual

Part No.	Range	Accuracy (without electronic indicator)	Setting ring	Extension rod	Price (\$)
2124-E035	.275-.35"	.00015"	.275" DIA (included)	4" (included)	596.00
2124-E0425	.35-.425"	.00015"	.35" DIA (included)	4" (included)	584.00
2124-E05	.425-.5"	.00015"	.5" DIA (included)	4" (included)	620.00
2124-E065	.5-.65"	.00015"	.65" DIA (included)	6" (included)	626.00
2124-E08	.65-.8"	.00015"	.65" DIA (included)	6" (included)	664.00
2124-E1	.8-.1"	.00015"	1" DIA (included)	6" (included)	708.00
2124-E112	1-.1.2"	.00015"	1" DIA (included)	6" (included)	754.00
2124-E16	1.2-1.6"	.00015"	1.6" DIA (included)	6" (included)	810.00
2124-E2	1.6-2"	.00020"	1.6" DIA (included)	6" (included)	863.00
2124-E25	2-2.5"	.00020"	2.5" DIA (included)	6" (included)	935.00
2124-E3	2.5-3"	.00020"	2.5" DIA (included)	6" (included)	996.00
2124-E35	3-3.5"	.00020"	3.5" DIA (included)	6" (included)	1059.00
2124-E4	3.5-4"	.00020"	3.5" DIA (included)	6" (included)	1128.00
2124-E5	4-5"	.00025"	optional	6" (included)	1188.00
2124-E6	5-6"	.00025"	optional	6" (included)	1368.00

Set

Part No.	Range	Probes included	Setting ring (included)	Extension rod	Price (\$)
2124-E053	.275-.5"	.275-.35", .35-.425", .425-.5"	.275" DIA, .35" DIA, .5" DIA	4" (included)	1521.00
2124-E082	.5-.8"	.5-.65", .65-.8"	.65" DIA	6" (included)	1128.00
2124-E24	.8-2"	.8-1", 1-1.2", 1.2-1.6", 1.6-2"	1" DIA, 1.6" DIA	6" (included)	2755.00
2124-E44	2-4"	2-2.5", 2.5-3", 3-3.5", 3.5-4"	2.5" DIA, 3.5" DIA	6" (included)	3438.00

MAGNETIC STAND

- For electronic/dial indicators and dial test indicators
- Applicable holding stem: 3/8" DIA, Ø8mm, Ø4mm
- With fine adjustment

Part No.	Magnetic force	Price (\$)
6201-60	132lbf	33.00



6201-60


DIAL CALIPERS

SHOCK
PROOF

INSPECTION
CERTIFICATE
TRACEABLE TO NIST


1311-6

OUTSIDE MICROMETERS WITH INTERCHANGEABLE ANVILS



3206-6

- Graduation .0001"
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards



Part No.	Range	Accuracy	Setting standard (included)	Price (\$)
3206-4	0-4"	.00020"	1", 2", 3"	245.00
3206-6	0-6"	.00025"	1", 2", 3", 4", 5"	264.00
3206-8	4-8"	.00030"	4", 5", 6", 7"	335.00
3206-12	6-12"	.00035"	6", 7", 8", 9", 10", 11"	317.00
3206-121	8-12"	.00035"	8", 9", 10", 11"	405.00

DIAL INDICATORS

INSPECTION
CERTIFICATE
TRACEABLE TO NIST


2307-1

DIAL TEST INDICATORS

JEWELLED
BEARING


2380-31

- Dial reading: 0-15-0
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: 5/32" DIA and 3/8" DIA
- Optional accessory: styli

Part No.	Range	Graduation	Accuracy	Price (\$)
2380-31	.03"	.001"	±.001"	86.80
2380-35	.03"	.0005"	±.0005"	108.00

DIGITAL MEASURING MICROSCOPE (WITH DISPLAY)

ATTENTION: PLEASE MAKE CONFOCAL ADJUSTMENT AFTER CHANGING CAMERA ADAPTERS OR AUXILIARY OBJECTIVES


MEASUREMENT

TAKE PICTURES

BUILT-IN SOFTWARE
WITHOUT COMPUTER

SPECIFICATION

Price (\$)	3750.00
Magnification	15X~100X
Sensor	1/2" CMOS
Pixel	2M
Resolution	1920×1080
Frame rate	60fps
Output	HDMI
Power supply	power adapter
Dimension	22.44×11.81×16.93"
Weight	14.44lb

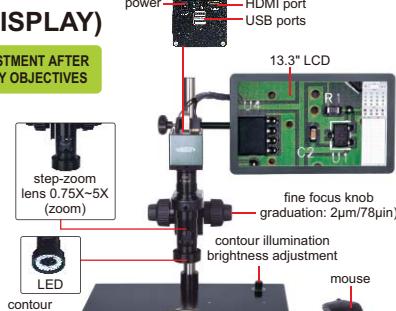
ISM-DL301-U
(with contour illumination)

- 1080P high-definition image
- Built-in software without computer, operated by mouse
- Take pictures, saved to USB flash disk
- Measurement results can be sent to Excel
- Automatic white balance and exposure
- Brightness, contrast ratio, gain are adjustable