




Turn to the
back page for
Pre-Install
Diagrams and
Roughing
instructions

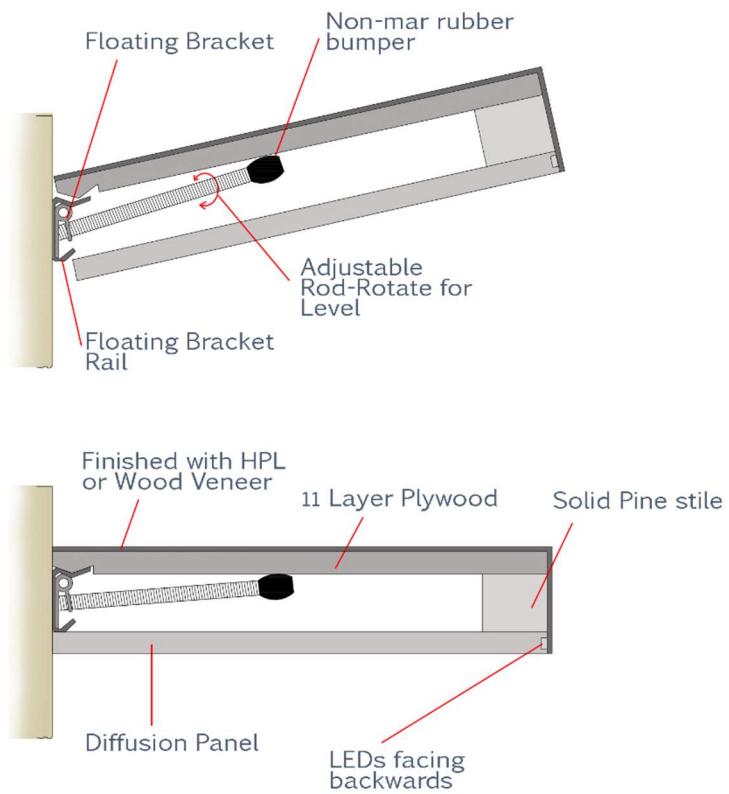

* * * * * * * *
* * * * * * * *
* * * * * * * *

LiteShelf Floating Installation Instructions

PREP



Set out all the included hardware. You'll need a drill, level, studfinder and wall screw fasteners.

01



01



02



Find the wall stud with the studfinder and mark the wall in an inconspicuous place. Slide in the two brackets, and fasten them directly into the wall stud.



03



Level the brackets by rotating the rods. Place the level on the tip of the bracket rod and on the rail, and rotate the rod as necessary.

05



Tilt the back of the LiteShelf down, and slide it over the brackets and rail.

Tap the touch plate once to turn on, and once to turn off. Use the integrated dimmer to adjust your Liteshelf's brightness. Brighten the light by holding the touch plate and dim the light by holding the touch plate again.

04





06



Roughing for LiteShelf Floating

LiteShelf Floating is designed to be mounted on a Horizontal outlet. The center of the outlet should be specified at 1.125" below the final desired height of the top surface of the shelf. A horizontal single gang electrical box or a square (1900) box with a single gang mud ring (outlet adapter) is optimal for correct installation. See below.

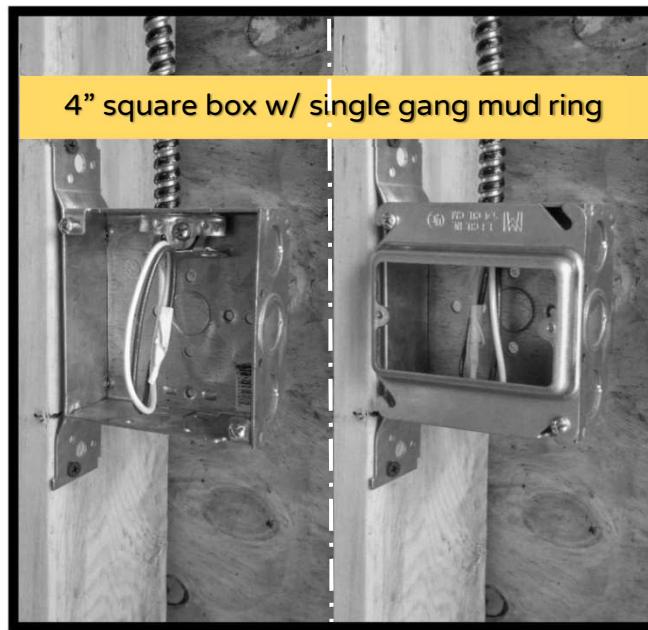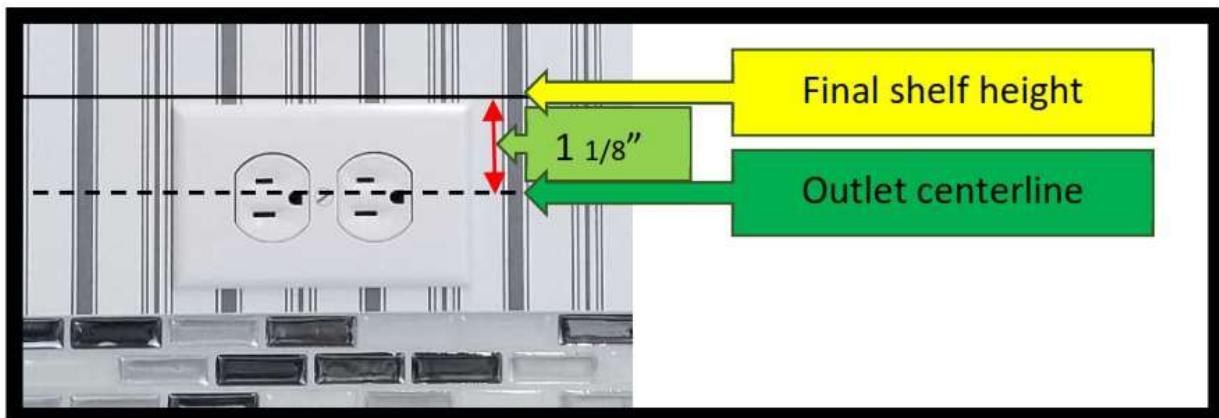

* * * * *