

806 large diameter

ApolloPress® press end copper 45° elbow
CxC (2-1/2" through 4")

**EPC FITTINGS****"Apollo" Press**

job name:	
job location:	
engineer:	
contractor:	
tag:	
po#:	
rep:	
wholesale dist.:	

description

the ApolloPress® 806 large diameter press 45° elbow features a lead free dezincification resistant copper body, a patented stainless-steel solid cross-section grab ring, a nylon separation ring and an EPDM o-ring. ApolloPress® products are manufactured utilizing proven ASTM materials and standards. proudly made in the USA.

features

- lead free construction
- leak before Press® technology
- visual element, break away band (Pat# 9,532,451)
- ridgid® XLC press tool compatible
- made in USA

approvals

- UPC, cUPC & IPC
- IAPMO PS 117-2016 & TIL MSE-13
- NSF/ANSI 61 - water quality
- NSF/ANSI 372 - lead free

performance rating

- maximum pressure: 300 psi
- temperature range: 32°F to 250°F depending on application

ApolloPress®

- large diameter sizes 2-1/2" through 4"
- model 806, 45° elbow


ApolloPress® connectors are designed for direct mechanical connection to ASTM B88-Type K, L, and M copper tubing in the hard drawn condition. Press connectors are not suitable for steam or flammable gas service.

standard materials list

body	UNS C12200 copper
grab ring	316/304 stainless steel
spacer ring	nylon 66
o-ring	EPDM
lubrication	silicone, ANSI/NSF-61 listed

dimensions

ITEM NO.	SIZE (IN.)	DIMENSIONS (IN.)								WEIGHT (LB.)	
		A	B	C	D	E	F	HEIGHT	WIDTH	DEPTH	
10062052	2-1/2	5.89	4.66	1.90	0.90	1.90	0.90	4.66	5.89	3.16	1.39
10062057	3	6.57	5.31	2.10	1.00	2.10	1.00	5.31	6.57	3.68	1.88
10062062	4	8.10	6.67	2.50	1.27	2.50	1.27	6.67	8.10	4.70	3.51

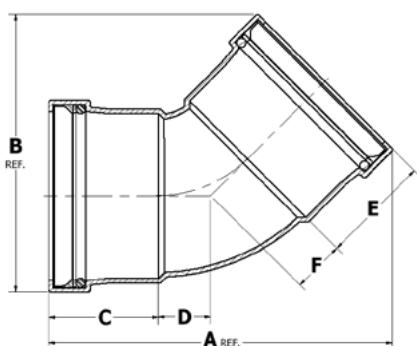

*lead free: the wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. complies with federal public law 111-380. ANSI 3rd party approved and listed.