




# TDD2 LED

## LED Area Luminaire




### Specifications

<b>Width:</b>	9-1/2" (24.0 cm)
<b>Height:</b>	9-1/8" (23.0 cm)
<b>Depth:</b>	11-3/8" (29.0 cm)
<b>Weight:</b>	4.8 lbs. (2.17 kg)

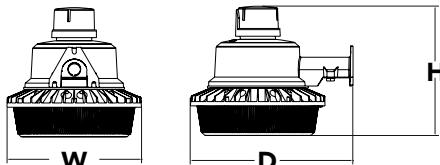

### Backplate

<b>Width:</b>	2-3/4" (7 cm)
<b>Height:</b>	2-1/4" (5.6 cm)
<b>Opening:</b>	1-3/4" (4.5 cm)



### Ordering Information

**EXAMPLE: TDD2 LED P1 50K 120 PER DNA M4**

TDD2 LED							
Series	Light Engine	Color Temperature	Voltage	Controls	Finish	Option	
TDD2 LED	P1 4,700 lumens	50K 5000K	120 120 volts	PER Twist-lock photocell included	DNA Grey	M4	

### Accessories

Ordered and shipped separately.

OMA Mounting Arm

### FEATURES & SPECIFICATIONS

#### INTENDED USE

The energy savings, long life and easy-to-install design of the TDD2 LED make it the smart choice for building-and post-mounted doorway, pathway and yard illumination for nearly any facility.

#### CONSTRUCTION

Die-cast aluminum housing has an impact-resistant, polycarbonate lens which protects the LEDs. The fixture is sealed against moisture and environmental contaminants.

#### FINISH

Exterior parts are protected by a thermoset powder-coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 2 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

#### OPTICS

Protective polycarbonate lens covers LEDs. Removable lower diffuser provides some up-light for a traditional appearance. DesignLights Consortium® (DLC) qualified with or without diffuser. Light engine is 5000K (80 min. CRI).

#### ELECTRICAL

Light engine consists of high-powered LEDs mounted to the outer edge of the integral aluminum heat sink to maximize heat dissipation and promote long LED life (L87/100,000 hours at 25 °C). 6kV surge protection. Electronic driver operates at 120V. Twist-lock replaceable photocell is standard.

#### INSTALLATION

Easily mounts to a wooden post or pole using 2" lag screws, included. Compatible with OMA-1-5/8" mounting arm, sold separately.

#### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations.

#### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



**LEFFELECTRIC**



# TDD2 LED P1 50K 120 PER DNA M4

Headquarters | 4700 Spring Rd, Brooklyn Hts, OH 44131 | 216.432.3000 | [www.LEFFELECTRIC.COM](http://www.LEFFELECTRIC.COM)

Akron 330.379.9800	Elyria 440.324.5483	Mentor 440.946.5448	Portage 330.297.7444	Strongsville 440.572.8188	Warren/Youngstown 330.372.3344	Warrensville Hts 216.591.0050
-----------------------	------------------------	------------------------	-------------------------	------------------------------	-----------------------------------	----------------------------------

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts.



Performance Package	CCT	System Watts	50K (5000K, 70 CRI)				
			Lumens	B	U	G	LPW
P1	5000K	41W	4,700	1	0	1	115

### Electrical Load

Current (A)
120V
0.20

### Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting Outdoor TDD LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

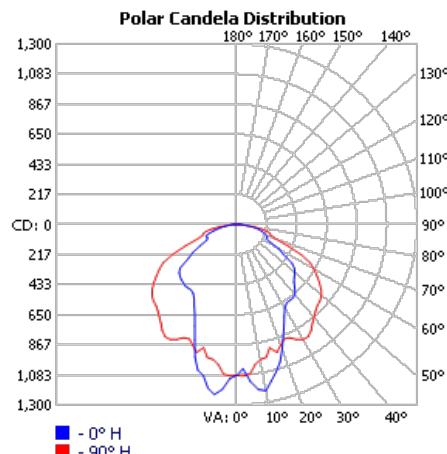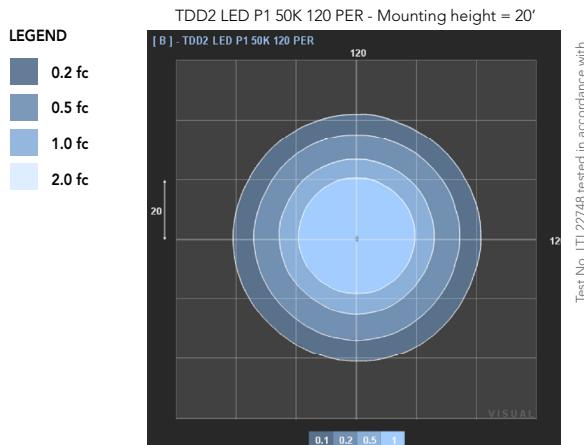

**LEFFELECTRIC**

Headquarters | 4700 Spring Rd, Brooklyn Hts, OH 44131 | 216.432.3000 | [www.LEFFELECTRIC.COM](http://www.LEFFELECTRIC.COM)

Akron 330.379.9800	Elyria 440.324.5483	Mentor 440.946.5448	Portage 330.297.7444	Strongsville 440.572.8188	Warren/Youngstown 330.372.3344	Warrensville Hts 216.591.0050
-----------------------	------------------------	------------------------	-------------------------	------------------------------	-----------------------------------	----------------------------------



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2015-2019 Acuity Brands Lighting, Inc. All rights reserved.

TDD2 LED  
Rev. 08/19/19