JFRL SERIES
FRAME PANEL



PRODUCT DESCRIPTION

The Jademar's led Frame light, with 1" inch luminous surface, offers an upscale, architectural aesthetic, output versatility and energy efficiency for interior grid ceiling applications. While delivering a high-end, unique look to any environment, this fixture is also highly adaptable based on the needs of that space.

STANDARD FEATURES

Mounting Options: Recessed T-Grid Mount.
Size: 2X2, 2X4 five different dimension models optional.
Electrical System

- Selectable Wattage:
  2x2: 20W / 30W / 40W
  2x4: 40W / 50W / 60W
- Selectable CCT: 3000K / 3500K / 4000K / 5000K/ 6500K
- Input Voltage: 120-277V
- Efficacy: Up to 130Lm/W
- CRI: 80Ra
- Ambient Temp: -40°F to 104°F (-40°C to 40°C)
- **Dimming and Controls**
- 0-10V Dimming Standard
- **Certifications and Compliance**
- UL Listed, IK10 Rated, DLC Listed, ETL Listed & NSF Rated
- Ingress Protec on: IP65

Life me Based on TM21: L70

- 168,000Hrs

PERFORMANCE SUMMARY


Selectable Power:	**2x2: 20W** / 30W / 40W **2x4: 40W** / 50W / 60W
Efficacy:	Up to 130Lm/W
Selectable CCT:	3000K / 3500K / 4000K / 5000K / 5000K
CRI:	80Ra
Input Voltage:	120-277VAC
Ambient Temp:	-40°F to 104°F (-40°C to 40°C)
Ingress Protection:	IP54 Standard
Dimming	0-10V Dimming
Lifetime Based on TM21:	@ L70 168,000 Hrs
Warranty:	10 Year Limited

MOUNTING OPTIONS



Recessed T-Grid Mount

PRODUCT DIMENSIONS



Size	X*Y	A*B	Height
2 x 2	23.74"*23.74"	23.75"*23.75"	0.59"
2 x 4	23.74"*47.72"	23.75"*47.75"	0.59"

*Remark: X*Y Means product size; A*B Means installation size*

JADEMAR LIGHTING
Quotations: quotes@jademar.com
To place an order: orders@jademar.com
Tel: (305) 640.0465 | Fax: (305) 640.0468
WWW.JADEMAR.COM

Information contained herein is subject to change without notice.
Revised 02/2025

SPECIFICATION SUBMITTAL DETAIL

PROJECT NAME:	
MODEL NUMBER:	
DATE:	


JFRL-SERIES FRAME LUMINAIRE

ORDERING INFORMATION / EXAMPLE: JFRL-22-40W

JFP-FR-IP65 -		-		-		-		-		-		-	
Product Series	**Size**		**Selectable Wattage**		**Input Voltage**		**CRI**		**Selectable CCT**		**Dimming Options**		**Mounting Options**	
JFRL	**22**	2Ft x 2Ft	**40W**	20W/30W/40W	**Blank**	120-277VAC	**Blank**	80Ra	**Blank**	30K/35K/40K/50K/65K	**Blank**	0-10V Dimming	**Blank**	Recessed T-Grid
	24	2Ft x 4Ft	**60W**	40W/50W/60W										

PRODUCT VIEW

Wattage selectable&CCT Tunable Driver Box Installed in the plenum space.

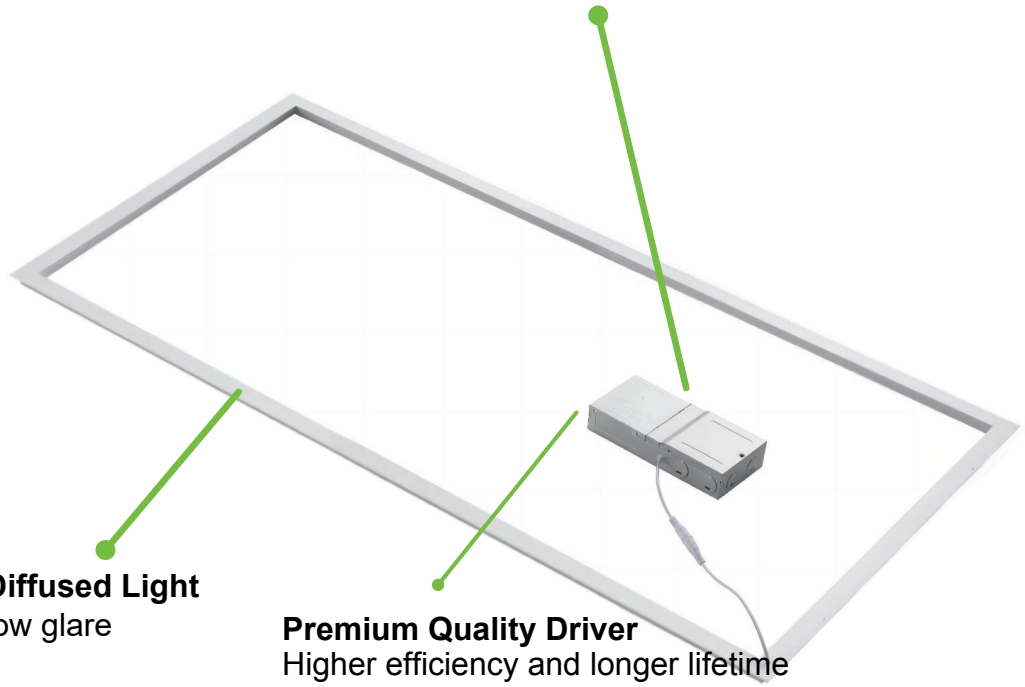

Diffused Light
low glare

Premium Quality Driver
Higher efficiency and longer lifetime

