

Yealink

SIP-T33G ENTRY-LEVEL IP PHONE WITH 4 LINES & COLOR LCD



An entry-level color screen IP phone with high performance, Yealink™ SIP-T33G offers support for 4 lines and includes local 5-way conferencing. For its fashionable appearance as well as an extra-large 320x240-pixel color display with backlight, it brings comfortable operation experience and clear visual experience for users. Designed with a new powerful chip, it helps greatly improved work efficiency.

Additional features include a dual-port Gigabit Ethernet with integrated PoE, EHS35 support for Yealink wireless headset, and adjustable multi-angle stand support. These features allow the SIP-T33G to be a high-quality but cost-effective classic IP phone that maximizes productivity in both small and large office environments.

KEY FEATURES AND BENEFITS

Stronger Performance, More Possibilities

Equipped with powerful chip, the T3 series owns a stronger computing ability and more upgraded functions, which ensures a higher productivity and smoother office experience. Due to great performance, T3 series is capable to extend more services for different business demands.

Superior HD Audio, Better Communication

The Yealink T3 series provides distraction-free communications with industry leading Smart Noise Filtering Technology, which delivers excellent sound quality without extraneous noises and allows fluent conversations.

Classic Design, Practical Details

Designed by Yealink original team, T3 series inherits the design concept of Yealink IP phone family. The advanced design including modern appearances and ergonomic details enables easier and friendly operation experience to users.

All in One Platform, Convenient Management

Proven reliability and integrations for Yealink Device Management Platform, installed the unified firmware, T3 series is simple to deploy and manage, which allows a significant reduction in the operation and maintenance cost.

- Yealink HD Voice
- 2.4" 320 x 240-pixel color display with backlight
- Dual-port Gigabit Ethernet
- PoE support
- Opus codec support
- Up to 4 SIP accounts
- Local 5-way conferencing
- Support EHS Wireless Headset
- Unified Firmware
- Support YDMP/YMCS
- Stand with 2 adjustable angles
- Wall mountable



UNIFIED
FIRMWARE



COLOR
SCREEN



ELEGANT
DESIGN



EHS



DEVICE
MANAGEMENT



HD



OPUS



5-WAY
CONFERENCING

YEALINK SIP-T33G PHONE SPECIFICATIONS



Audio Features

- HD voice: HD handset, HD speaker
- Smart Noise Filtering
- Wideband codec: Opus, G.722
- Narrowband codec: G.711(A/μ), G.723.1, G.729, G.729A, G.726, iLBC
- DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO
- Full-duplex hands-free speakerphone with AEC
- VAD, CNG, AEC, PLC, AJB, AGC

Phone Features

- 4 VoIP accounts
- Call hold, mute, DND
- One-touch speed dial, hotline
- Call forward, call waiting, call transfer
- Group listening, SMS, emergency call
- Redial, call return, auto answer
- Local 5-way conferencing
- Direct IP call without SIP proxy
- Ring tone selection/import/delete
- Set date time manually or automatically
- Dial plan
- XML Browser, action URL/URI
- Integrated screenshots
- RTPC-XR, VQ-RTCPXR
- Enhanced DSS Key

Directory


- Local phonebook up to 1000 entries
- Blacklist
- XML/LDAP remote phonebook
- Smart dialing
- Phonebook search/import/export
- Call history: dialed/received/missed/forwarded

IP-PBX Features

- Busy Lamp Field (BLF), Bridged Line Appearance (BLA)
- Anonymous call, anonymous call rejection
- Hot-desking, voice mail
- Flexible seating
- Call park, call pickup
- Executive and Assistant

Other Physical Features

- Color: Classic Grey
- Wall mountable
- External Yealink AC adapter
AC 100~240V input and DC 5V/600mA output
- Power consumption (PSU): 2-3W
- Power consumption (PoE): 3.5-5W
- Dimension (W*D*H*T):
212mm*186mm*146mm*42mm
- Operating humidity: 10~95%
- Operating temperature: -10~50°C (+14~122°F)

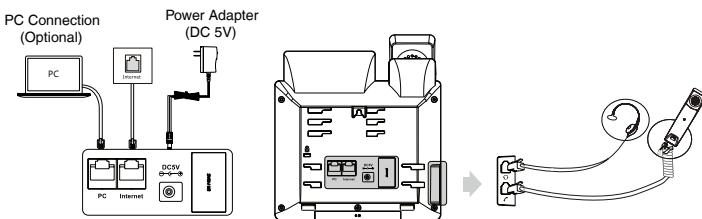

- Centralized call recording
- Visual voice mail
- Call recording

Display and Indicator

- 2.4" 320 x 240-pixel color display with backlight
- 16 bit depth color
- LED for call and message waiting indication
- Dual-color (red or green) illuminated LEDs for line status information
- Wallpaper
- Intuitive user interface with icons and soft keys
- Multilingual user interface
- Caller ID with name and number
- Screensaver
- Power saving

Feature keys

- 4 line keys with LED
- 4 line keys can be programmed up to 12 paper - less DSS keys (4-page view)
- 5 features keys: message, headset, redial, mute, hands-free speakerphone
- 6 navigation keys
- Volume control keys

Interface

- Dual-port Gigabit Ethernet
- Power over Ethernet (IEEE 802.3af), class 2
- x RJ9 (4P4C) handset port

Management

- Configuration: browser/phone/auto-provision
- Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- Auto-provision with PnP
- Zero-sp-touch, TR-069
- Phone lock for personal privacy protection
- Reset to factory, reboot
- Package tracing export, system log

Network and Security

- SIP v1 (RFC2543), v2 (RFC3261)
- Call server redundancy supported
- NAT traversal: STUN mode
- Proxy mode and peer-to-peer SIP link mode
- IP assignment: static/DHCP
- HTTP/HTTPS web server
- Time and date synchronization using SNTP
- UDP/TCP/DNS-SRV (RFC 3263)
- QoS: 802.1p/Q tagging (VLAN), Layer 3 Tos DSCP
- SRTP for voice
- Transport Layer Security (TLS)
- HTTPS certificate manager
- AES encryption for configuration file
- Digest authentication
- OpenVPN, IEEE802.1X
- IPv6
- LLDP/CDP/DHCP VLAN
- ICE

Package Features

- Package content:
 - Yealink SIP-T33G IP phone
 - Handset with handset cord
 - Ethernet Cable (1.5m CAT5E UTP Cable)
 - Stand
 - Quick Start Guide
 - Power Adapter (Optional)
- Qty/CTN: 10 PCS
- N.W/CTN: 9.56 kg
- G.W/CTN: 10.52 kg
- Giftbox size: 238 mm*210 mm*103 mm
- Carton Meas: 535 mm*443 mm*250 mm

Compliance



3CX broadsoft metaswitch

Yealink

NEC and the NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All trademarks identified with © or TM are registered trademarks or trademarks of their respective owners. Models may vary for each country, and due to continuous improvements this specification is subject to change without notice. Please refer to your local NEC representative(s) for further details.

Americas (U.S., Canada, Latin America)

NEC Corporation of America

www.necam.com

For further information please contact NEC Corporation of America or: