


LED RECESSED RETROFIT KIT



Features

Watran recessed LED downlight lights are manufactured under the ISO 9001 quality control system, which contain: high-efficiency LED, minimum color-rendering index of 80-90%, with a life of 30,000 hours. The aluminum housing makes the fixture safe, durable, and brings good heat dissipation, which make the fixture suitable for use in office rooms, shopping malls, stores, libraries, homes and other indoor locations.

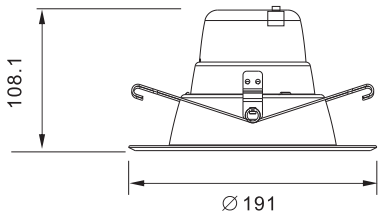

WatranLF10/120/SD507T 15W

Illuminance at a Distance

	Center Beam LUX	Beam Width V	H
2m	127.44 LUX	4.0m	3.8m
4m	31.86 LUX	8.0m	7.7m
6m	14.16 LUX	11.0m	11.5m
8m	7.96 LUX	15.0m	15.4m
10m	5.10 LUX	19.0m	19.2m
12m	3.54 LUX	23.0m	23.1m

Vert. Spread: 89.8 Horiz. Spread: 87.8

Product Specifications

1100lms.
3000K/4000K
80/90CRI

15w 75w
replaces

ERP	V	W	W	PF	Ra	LM	K	Beam Angle	h	IP
Product Code	Supply Voltage	Power	Circuit Power	Power Factor		Flux	CCT		Service life	IP Rating
80702 WatranLF13/120/SD507T 15W										
80702B	AC120V	28x0.5	15	≥0.95	80	1100	3000	90	≥35000	IP20
80702A	AC120V	28x0.5	15	≥0.95	90	1100	4000	90	≥35000	IP20

