


IK: Impact Rating Table & Method

IK00	Not protected
IK01	Equivalent to impact of 0.25kg (8.8 ounces) mass dropped from 56mm (2.2 inches) above impacted surface.
IK02	Equivalent to impact of 0.25kg mass (8.8 ounces) dropped from 80mm (3.1 inches) above impacted surface.
IK03	Equivalent to impact of 0.25kg (8.8 ounces) mass dropped from 140mm (5.5 inches) above impacted surface.
IK04	Equivalent to impact of 0.25kg (8.8 ounces) mass dropped from 200mm (7.9 inches) above impacted surface.
IK05	Equivalent to impact of 0.25kg (8.8 ounces) mass dropped from 280mm (11.4 inches) above impacted surface.
IK06	Equivalent to impact of 0.25kg (8.8 ounces) mass dropped from 400mm (15.75 inches) above impacted surface.
IK07	Equivalent to impact of 0.5kg (1 pound, 1.6 ounces) mass dropped from 400mm (15.75 inches) above impacted surface.
IK08	Equivalent to impact of 1.7kg (3 pounds, 12 ounces) mass dropped from 300mm (11.8 inches) above impacted surface.
IK09	Equivalent to impact of 5kg mass (11 pounds, 0.37 ounces) dropped from 200mm (7.9 inches) above impacted surface.
IK10	Equivalent to impact of 5kg (11 pounds, 0.37 ounces) mass dropped from 400mm (15.75 inches) above impacted surface.

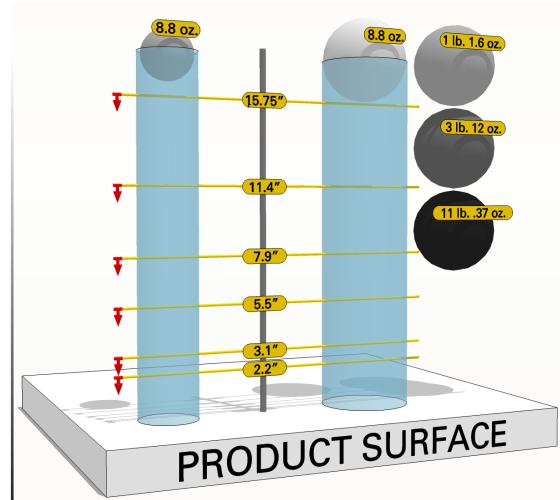

 SOLAS RAY™ LIGHTING
 1524 Jackson Street, Anderson, IN 46016
 Phone 765-298-8030 • Fax 765-622-0697
www.SolasRay.com